Southwire®

TRANSPORTATION
CATALOG

OUR STORY

As a family business, Southwire® proudly continues building on our commitment to environmental stewardship and corporate sustainability by prioritizing stakeholder expectations, and supporting the wellbeing of our communities and the environment in which we live. To help us meet this commitment, we organize our sustainability strategy around five core tenets: Growing Green, Living Well, Giving Back, Doing Right, and Building Worth.

We Deliver Power…Responsibly®

We remain committed to the sustainability of our company for the next 100 years and beyond. As we strengthen this commitment, we continue to work hard every day to discover, develop and distribute sustainable solutions that exceed the expectations of our stakeholders around the world.

OUR MISSION

To be a *preferred provider* of solutions to the electrical industry by providing innovative products and services with exceptional quality.

OUR VALUES

Our *ONE Southwire* culture prioritizes the interests of our team members, customers, and communities through a continuous commitment to empowerment, trust, consistency, and inclusion.

OUR REACH

Nearly one in two new homes built in the United States contains our wire, and we produce half of the cable used to transmit and distribute electricity throughout the nation.

OUR PRODUCTS

Our product teams and dedicated resources work together to listen to and work with our customers, creating solutions that deliver unparalleled value through product innovation, safety and efficiency.

OUR SERVICE

Service is more than a word or a phone number; it's a tangible support system that assists you through the entire project cycle; from our knowledgeable customer service team, to our experienced field sales team, we're there every step of the way.

TABLE OF CONTENTS

BUILT FOR DURABILITY. BUILT FOR RELIABILITY. BUILT FOR WORK.™

AUTOMOTIVE

For more than 30 years, Road Power®
booster cables and battery accessories have
provided consumers the power to keep their
vehicle on the road. Our continual innovation
and high quality assures that we will have
the solution you can count on to keep your
vehicle running smoothly.

• Booster Cables

• Booster Cables Clamps

• Battery Cables

• Battery Accessories
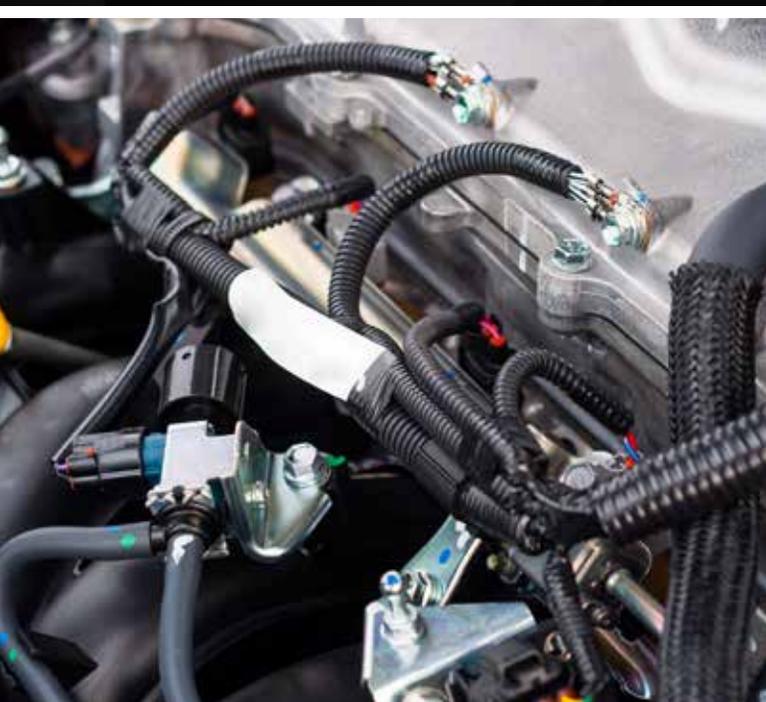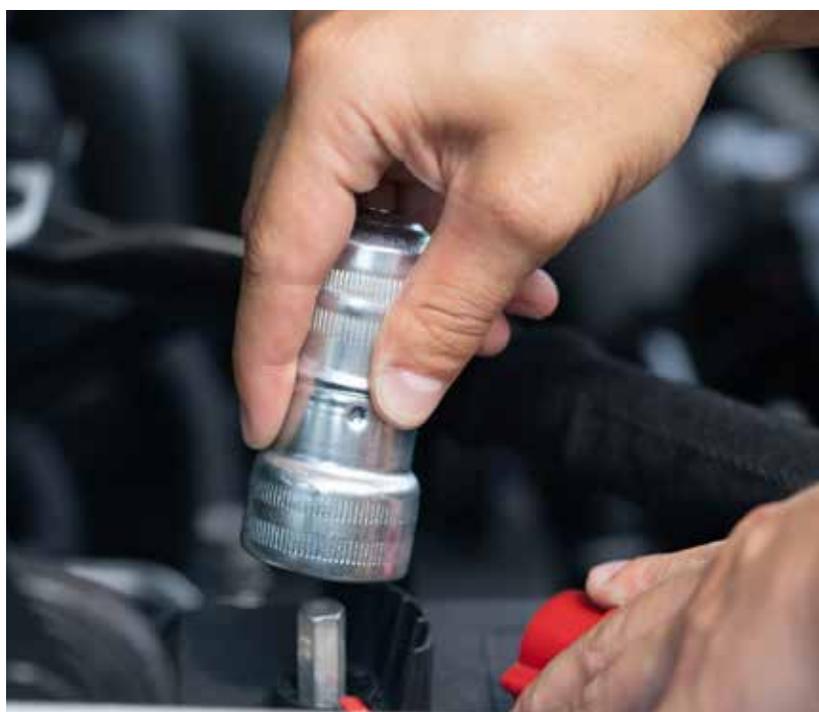
• Battery Terminals

LIGHT-DUTY BOOSTER CABLES

81208808

SPECIFICATIONS:
- Conforms to SAE Standards
- Cable flexibility range: -40°C to 70°C
- Popular cable configurations
- Perfect for smaller vehicles
- Variety of merchandising options
- Fits top and side post batteries
- Dirt-hiding black cables
- All weather capability
- 200 Amp clamps

MODEL #	WIRE GAUGE	JACKET COLOR	LENGTH (feet)	PACKAGE TYPE	MASTER PACK QUANTITY	MASTER WEIGHT (lbs)	MASTER PACK CUBE
81208808	10	Black	12	Sleeve	6	15	0.52

MEDIUM-DUTY BOOSTER CABLES

84678802

SPECIFICATIONS:
- Conforms to SAE Standards
- Cable flexibility ranges: -50°C to 80°C/-40°C to 70°C
- Popular cable configurations
- Perfect for smaller vehicles
- Variety of merchandising options
- Fits top and side post batteries
- High visibility yellow cables
- All weather capability
- 200 Amp clamps

MODEL #	WIRE GAUGE	JACKET COLOR	LENGTH (feet)	PACKAGE TYPE	MASTER PACK QUANTITY	MASTER WEIGHT (lbs)	MASTER PACK CUBE
84358802*	8	Yellow	12	Sleeve	6	17	0.52
84718802*	8	Yellow	12	Sleeve	6	19	0.69
84458802	8	Yellow	12	Box	4	17	0.41
84658802	8	Yellow	12	Box	6	24	1.65
84678802	8	Yellow	12	Bag	2	8	0.92

HEAVY-DUTY BOOSTER CABLES

85650103

SPECIFICATIONS:
- UL Certified or SAE conforming Booster Cables
- Cable flexibility ranges: -50°C to 80°C/-40°C to 70°C
- Copper plated steel jaw contact
- PVC coated steel clamps
- +POS and -NEG stamped into clamps
- Connection instructions on box
- Fits top and side post batteries
- High Visibility Orange cables
- All weather capability
- 400 Amp clamps

MODEL #	WIRE GAUGE	JACKET COLOR	LENGTH (feet)	PACKAGE TYPE	MASTER PACK QUANTITY	MASTER WEIGHT (lbs)	MASTER PACK CUBE
85650103	6	Orange	12	Box	6	24	1.66
85660103	6	Orange	16	Box	6	27	1.66

BOOSTER CABLES

EXTRA HEAVY-DUTY BOOSTER CABLES

86660104

SPECIFICATIONS:
- UL Certified or SAE Conforming Booster Cables
- Cable flexibility ranges: -50°C to 80°C/-40°C to 70°C
- Copper plated steel jaw contact
- PVC coated steel clamps
- +POS and -NEG stamped into clamps
- Connection instructions on box
- High Visibility Red Cables
- All weather capability
- 400 Amp clamps

MODEL #	WIRE GAUGE	JACKET COLOR	LENGTH (feet)	PACKAGE TYPE	MASTER PACK QUANTITY	MASTER WEIGHT (lbs)	MASTER PACK CUBE
86650104	4	Red	12	Box	2	10	0.76
86660104	4	Red	16	Box	2	11	0.76
86600104	4	Red	20	Box	2	13	0.76
86620104	4	Red	25	Box	2	14	0.76

COMMERCIAL GRADE BOOSTER CABLES

87600108

SPECIFICATIONS:
- Conforms to SAE Standards
- Heavy Duty Parrot Jaw Clamps
- Plated steel clamps with PVC insulation
- Cable flexibility ranges: -50°C to 80°C/-40°C to 70°C
- 500 Amp Clamps
- For use with large pickups and equipment
- Black cable hides dirt
- All weather capability

MODEL #	WIRE GAUGE	JACKET COLOR	LENGTH (feet)	PACKAGE TYPE	MASTER PACK QUANTITY	MASTER WEIGHT (lbs)	MASTER PACK CUBE
87650108	4	Black	12	Box	2	10	0.92
87660108	4	Black	16	Box	2	12	0.92
87600108	4	Black	20	Box	2	14	0.92
88600108	2	Black	20	Box	2	18	0.92
88620108	2	Black	25	Box	2	21	0.92

BOOSTER CABLES WITH NIGHT BRIGHT™ CLAMPS

85680103

SPECIFICATIONS:
- All 4 clamps have LED built into clamp
- Just squeeze clamp to provide light
- Provides light for safe and easy jump starting
- Perfect for night use
- Long-lasting LED with typical use
- Replaceable battery
- Tangle-free PVC insulated cables
- Flexible to -40F/C
- Color Coded for easy polarity identification
- Copper Plated Aluminum cable
- Easy to understand with TRY ME packaging
- 250 Amp Cable and 400 Amp Clamps

MODEL #	WIRE GAUGE	JACKET COLOR	LENGTH (feet)	PACKAGE TYPE	MASTER PACK QUANTITY	MASTER WEIGHT (lbs)	MASTER PACK CUBE
85680103	6	Orange	16	Box	6	28.6	0.2816

ROAD GLOW™ TECHNOLOGY CABLES

84696812

Road Power is introducing two new Booster Cables with Exclusive Road Glow™ Technology! These electroluminescent booster cables glow in the dark to ensure added safety, visibility and ease of use when trying to jump start a car battery!

SPECIFICATIONS:
- Glows When Connected Correctly
- Provides Light For Nighttime Jump Starts
- Great For Roadside Safety At Night
- Lights The Length Of The Cable
- Flexibility Guaranteed At -40°F
- Patented Technology

MODEL #	WIRE GAUGE	JACKET COLOR	LENGTH (feet)	PACKAGE TYPE	MASTER PACK QUANTITY	MASTER WEIGHT (lbs)	MASTER PACK CUBE
84696812	8	Blue	12	Box	6	20.06	0.363
84696616	6	Blue	16	Box	6	27.99	0.350

BOOSTER CABLES CLAMPS

LIGHT DUTY REPLACEMENT CLAMPS

150C-2

SPECIFICATIONS:
- Copper plated steel construction
- Covered handle
- One red/black set per item number

MODEL #	WIRE GAUGE (AMP)	JACKET COLOR	PACKAGE TYPE	MASTER PACK QUANTITY	MASTER WEIGHT (lbs)	MASTER PACK CUBE
150C-2	150	1 Red & 1 Black	Blister	6	0.50	0.05
75C-2	50	1 Red & 1 Black	Blister	6	0.30	0.05

HEAVY DUTY REPLACEMENT CLAMPS

400C-2

8904RP0000

SPECIFICATIONS:
- Alligator or Parrot jaw styles
- Vinyl coated steel construction
- Copper teeth
- Coated handles
- One red/black set per item number

MODEL #	WIRE GAUGE (AMP)	JACKET COLOR	PACKAGE TYPE	MASTER PACK QUANTITY	MASTER WEIGHT (lbs)	MASTER PACK CUBE
400C-2	500	1 Red & 1 Black	Blister	6	0.35	0.44
8904RP0000	500	1 Red & 1 Black	Box	6	12.52	0.43

BATTERY CABLE SAVERS

950   **951**   **952**

Allows replacement of a worn or corroded connection without replacing the entire cable.

SPECIFICATIONS:
- Saves time and money
- Easy to replace
- Top post and side post cables available
- Made of tin-plated brass for better current transfer

MODEL #	DESCRIPTION	PACKAGE TYPE	MASTER PACK	MASTER WEIGHT (lbs)	MASTER PACK CUBE
950	Top Post	Clamshell	3	1.41	0.15
951		Clamshell	3	2.71	0.15
952	Side Post	Clamshell	3	1.41	0.15

TOP POST LEAD-FREE 4 GAUGE

TOP POST BLACK

Replace worn or old battery cables for a better start every time.

SPECIFICATIONS:
- Designed for use with 6 to 12 Volt batteries
- Cable is copper
- Terminals are made of tin-plated brass for superior conductivity
- Top post in red or black in various lengths

TOP POST RED

MODEL #	DESCRIPTION	PACKAGE TYPE	MASTER PACK QUANTITY	MASTER WEIGHT (lbs)	MASTER PACK CUBE
15-4	15" 4 Gauge Top Post - Black	Clamshell	3	2	0.11
15-4R	15" 4 Gauge Top Post - Red	Clamshell	3	2	0.11
19-4	19" 4 Gauge Top Post - Black	Clamshell	3	2	0.11
19-4R	19" 4 Gauge Top Post - Red	Clamshell	3	2	0.11
24-4	24" 4 Gauge Top Post - Black	Clamshell	3	2	0.11
31-4	31" 4 Gauge Top Post - Black	Clamshell	3	3	0.11
31-4R	31" 4 Gauge Top Post - Red	Clamshell	3	3	0.11
38-4	38" 4 Gauge Top Post - Black	Clamshell	3	3	0.11
42-4	42" 4 Gauge Top Post - Black	Clamshell	3	3	0.11
48-4	48" 4 Gauge Top Post - Black	Clamshell	3	3	0.11

AUTOMOTIVE | BATTERY CABLES

REPLACEMENT BATTERY CABLES

TOP POST LEAD-FREE 4 GAUGE WITH LEAD WIRE

**TOP POST
W/ LEAD BLACK**

**TOP POST
W/ LEAD RED**

SPECIFICATIONS:
- Designed for use with 6 to 12 Volt batteries
- Single lead wire for additional application
- Cable core is copper
- Terminals are made of tin-plated brass for superior conductivity
- Top post in red or black in various lengths
- PVC wire jacket is oil, chemical and water resistant
- Lead-free

MODEL #	DESCRIPTION	PACKAGE TYPE	MASTER PACK QUANTITY	MASTER WEIGHT (lbs)	MASTER PACK CUBE
25-4L	25" 4 Gauge Top Post w/ Lead - Black	Clamshell	3	3	0.11
25-4LR	25" 4 Gauge Top Post w/ Lead - Red	Clamshell	3	3	0.11
32-4L	32" 4 Gauge Top Post w/ Lead - Black	Clamshell	3	3	0.11
32-4LR	32" 4 Gauge Top Post w/ Lead - Red	Clamshell	3	3	0.11
38-4L	38" 4 Gauge Top Post w/ Lead - Black	Clamshell	3	3	0.11
38-4LR	38" 4 Gauge Top Post w/ Lead - Red	Clamshell	3	3	0.11
42-4L	42" 4 Gauge Top Post w/ Lead - Black	Clamshell	3	3	0.11
48-4L	48" 4 Gauge Top Post w/ Lead - Black	Clamshell	3	3	0.11
48-4LR	48" 4 Gauge Top Post w/ Lead - Red	Clamshell	3	3	0.11
54-4L	54" 4 Gauge Top Post w/ Lead - Black	Clamshell	3	4	0.11
54-4LR	54" 4 Gauge Top Post w/ Lead - Red	Clamshell	3	4	0.11

AUTOMOTIVE | BATTERY CABLES

REPLACEMENT BATTERY CABLES

TOP POST LEAD-FREE 6 GAUGE

TOP POST BLACK

Replace worn cables for a better start every time.

SPECIFICATIONS:
- Designed for use with 6 to 12 Volt batteries
- Single lead wire for additional application
- Cable core is copper
- Terminals are made of tin-plated brass for superior conductivity
- PVC wire jacket is oil, chemical and water resistant
- Lead-free

**TOP POST
W/ LEAD BLACK**

MODEL #	DESCRIPTION	PACKAGE TYPE	MASTER PACK QUANTITY	MASTER WEIGHT (lbs)	MASTER PACK CUBE
15-6	15" 6 Gauge Top Post - Black	Clamshell	3	2	0.11
38-6L	38" 6 Gauge Top Post w/ Lead - Black	Clamshell	3	2	0.11

SIDE TERMINAL 4 GAUGE WITH LEAD WIRES

**SIDE TERMINAL
W/ LEAD RED**

SPECIFICATIONS:
- Designed for use with 6 to 12 Volt batteries
- Single lead wire for additional application
- Cable core is copper
- Terminals are made of tin-plated brass for superior conductivity
- Side Terminal in red or black
- PVC wire jacket is oil, chemical and water resistant
- Lead-free

**TOP POST
W/ 2 LEADS BLACK**

MODEL #	DESCRIPTION	PACKAGE TYPE	MASTER PACK QUANTITY	MASTER WEIGHT (lbs)	MASTER PACK CUBE
ST45-4	45" 4 Gauge Side Terminal w/ Lead - Black	Clamshell	3	3	0.11
ST45-4R	45" 4 Gauge Side Terminal w/ Lead - Red	Clamshell	3	3	0.11

REPLACEMENT BATTERY CABLES

SWITCH TO STARTER 4 GAUGE

SWITCH TO STARTER BLACK

For a better start, replace a worn or old switch to stater cable.

SPECIFICATIONS:
- Designed for use with 6 to 12 Volt batteries
- 4 Gauge Cable with copper core
- Terminals are made of tin-plated brass for superior conductivity
- PVC wire jacket is oil, chemical and water resistant
- Various lengths available

MODEL #	DESCRIPTION	PACKAGE TYPE	MASTER PACK QUANTITY	MASTER WEIGHT (lbs)	MASTER PACK CUBE
SS24-4	24" 4 Gauge Switch to Starter - Black	Clamshell	3	2	0.11
SS32-4	32" 4 Gauge Switch to Starter - Black	Clamshell	3	2	0.11
SS40-4	40" 4 Gauge Switch to Starter - Black	Clamshell	3	3	0.11
SS45-4	45" 4 Gauge Switch to Starter - Black	Clamshell	3	3	0.11
SS51-4	51" 4 Gauge Switch to Starter - Black	Clamshell	3	4	0.11
SS58-4	58" 4 Gauge Switch to Starter - Black	Clamshell	3	4	0.11

LAWN & GARDEN 6 GAUGE

LAWN & GARDEN BLACK

Designed for use with Lawn and Garden equipment.

SPECIFICATIONS:
- Switch to Starter Cable for a better start every time.
- Use with 6 to 12 Volt batteries
- 4 Gauge Cable with copper core
- Terminals are made of tin-plated brass for superior conductivity
- PVC wire jacket is oil, chemical and water resistant
- Various lengths available

MODEL #	DESCRIPTION	PACKAGE TYPE	MASTER PACK QUANTITY	MASTER WEIGHT (lbs)	MASTER PACK CUBE
LG19-6	19" 6 Gauge Lawn & Garden - Black	Clamshell	3	2	0.11
LG27-6	27" 6 Gauge Lawn & Garden - Black	Clamshell	3	2	0.11
LG49-6	49" 6 Gauge Lawn & Garden - Black	Clamshell	3	3	0.11

GENERAL ACCESSORIES

965

970

We have a full line of battery maintenance and electrical replacement accessories to keep your vehicle running.

1810-2

966-12

969

992

966-12

989

986

MODEL #	DESCRIPTION	PACKAGE TYPE	MASTER PACK QUANTITY	MASTER WEIGHT (lbs)	MASTER PACK CUBE
986	Post & Terminal Cleaner (Metal)	Clamshell	6	1.1	0.09
989	Anti-Corrosion Washers – 2-Pack	Blister	12	0.20	0.03
992	Premium Hydrometer	Clamshell	4	1.2	0.14
965	Battery Terminal Lifter	Blister	6	0.3	0.12
969	Terminal Cap Protector (TOP) – 2-Pack	Clamshell	6	0.24	0.10
970	Rubber Battery Filler	Blister	6	0.24	0.20
1810-2	4 & 6 Gauge, 2-Pack (3/8")	Blister	4	0.28	0.14
966-8	8" J Hooks	Blister	4	1.12	0.05
966-10	10" J Hooks – GM, 2-Pack	Blister	4	1.32	0.06
966-12	12" J Hooks, 2-Pack	Blister	4	1.4	0.06
975	Universal Crossbar	Blister	3	1.74	0.25
980	Battery Hold Down Kit	Blister	4	2.40	0.15

BATTERY ACCESSORIES

HEAVY-DUTY TOP POST UNIVERSAL

903-1

903B-1

Our extensive line of top post terminals and accessories make repairs easy.

SPECIFICATIONS:
- Terminals fit 6 through 1 gauge cable
- For use with 6 and 12 volt batteries
- Flexible use for top post, side post, truck and marine terminals

904

909-1

906-1

903C-2

982

MODEL #	DESCRIPTION	PACKAGE TYPE	MASTER PACK QUANTITY	MASTER WEIGHT (lbs)	MASTER PACK CUBE
903-1	Single Pack	Blister	12	3.39	0.07
903-10	Ten Pack	Card	10	20.96	0.39
903B-1	Brass – Single Pack	Blister	12	0.16	0.07
903C-2	Coated (Red/Black)	Blister	6	2.70	0.06
904	Lead-free w/ Wing Nut	Blister	4	0.54	0.02
982	Battery Post Shims	Blister	3	0.15	0.01
909-1	Lead-free – Single Pack	Blister	6	1	0.06
906-1	Truck - Single Pack	Blister	6	3.49	0.06

HEAVY-DUTY SIDE TERMINAL

905-1

Side post terminals and accessories make repairs quick and easy.

SPECIFICATIONS:
- Terminals fit 6 through 1 gauge cable
- Adapters convert top post to side post
- For use with 6 and 12 volt batteries

925

926-2

928

MODEL #	DESCRIPTION	PACKAGE TYPE	MASTER PACK QUANTITY	MASTER WEIGHT (lbs)	MASTER PACK CUBE
905-1	Single Pack	Blister	6	2	0.04
925	Side-Terminal Adapters Set (1 pos/1 neg)	Blister	6	5.05	0.06
926-2	OEM Style, 2-Pack	Blister	6	0.14	0.04
928	Extender Bolt w/ Diesel Spacer	Blister	6	1.45	0.09

AUTOMOTIVE | BATTERY ACCESSORIES

BATTERY ACCESSORIES

UNIVERSAL CHARGING POST

922

Converts side terminal battery to a post battery.

SPECIFICATIONS:
- Constructed of magnesium-aluminum alloy.
- One positive and one negative per card.
- Can be used with top post, side post, truck, and marine battery terminals

MODEL #	DESCRIPTION	PACKAGE TYPE	MASTER PACK QUANTITY	MASTER WEIGHT (lbs)	MASTER PACK CUBE
922	Set (1 Positive/1 Negative)	Blister	6	2.5	0.04

BOLTS & NUTS

923-2

MODEL #	DESCRIPTION	PACKAGE TYPE	MASTER PACK QUANTITY	MASTER WEIGHT (lbs)	MASTER PACK CUBE
923-2	Top Post 2-Pack	Blister	6	0.61	0.04

MARINE TERMINALS

962-1   **962-2**

Use with marine grade batteries and battery cables only.

SPECIFICATIONS:
- Works with cable 6 through 1 gauge
- Replaces worn or corroded terminals

962C-2

MODEL #	DESCRIPTION	PACKAGE TYPE	MASTER PACK QUANTITY	MASTER WEIGHT (lbs)	MASTER PACK CUBE
962-1	Single Pack	Blister	6	1.93	0.04
966-10	Set (1 Positive/1 Negative)	Blister	6	3	0.08
966-12	Coated (Red/Black)	Blister	6	3.06	0.07
967	4 Sets (4 Positive/4 Negative)	Card	8	24.53	0.71

LIGHTING

Southwire Lighting Solutions has everything you need for indoor and outdoor lighting. We offer different lighting solutions to fit all of your needs! LED Cart Lights and Balloon Lights are perfect for illuminating large open areas. Whilst Southwire Work Lights help bring light to smaller rooms.

• Jobsite Lighting

• Work Lights
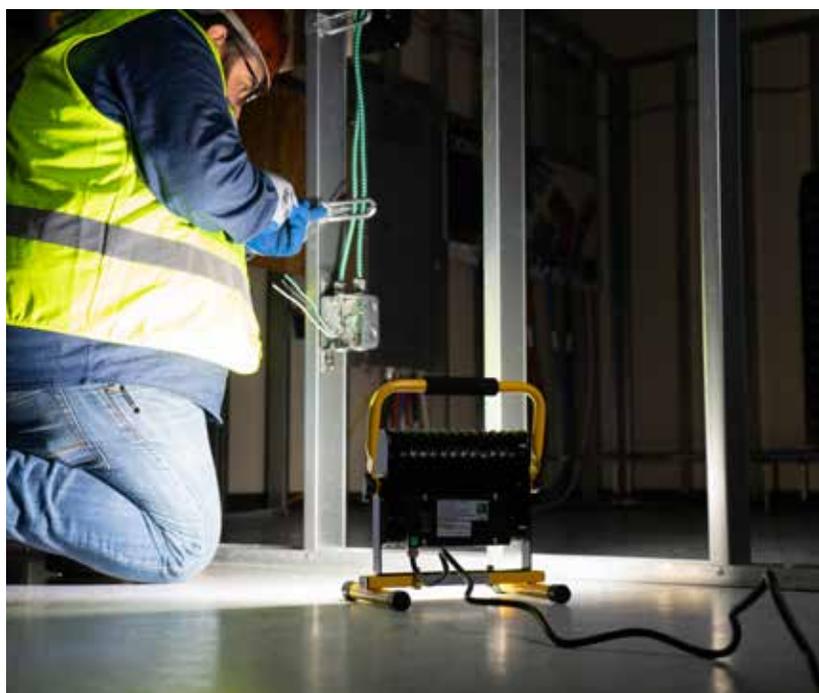
• Area Lights

SLIM SERIES LED WORK LIGHT

411050

411350

- Aluminum body
- IP65, indoor or outdoor use
- Operating temp: -40° to 122° F
- 5,000 K LED with 50,000 hr. life
- 120V, 5' - 18/3 SJTW cord

MODEL #	DESCRIPTION	LUMENS	WATTS	STAND
411015	1,500 Lumen LED Slim Work Light	1,500	15W	Floor Stand
411215	1,500 Lumen LED Slim Work Light w/ Tripod	1,500	15W	Tripod
411315	3,000 Lumen LED Twin Head Slim Light w/ Tripod	1,500 x2	30W	Tripod
411030	3,000 Lumen LED Slim Work Light	3,000	30W	Floor Stand
411430	3,000 Lumen LED Slim Work Light w/ Magnetic Base	3,000	30W	Magnetic Disc Base
411230	3,000 Lumen LED Slim Work Light w/ Tripod	3,000	30W	Tripod
411330	6,000 Lumen LED Twin Head Slim Light w/ Tripod	3,000 x2	60W	Tripod
411050	5,000 Lumen LED Slim Work Light	5,000	50W	Floor Stand
411450	5,000 Lumen LED Slim Work Light w/ Magnetic Base	5,000	50W	Magnetic Disc Base
411250	5,000 Lumen LED Slim Work Light w/ Tripod	5,000	50W	Tripod
411350	10,000 Lumen LED Twin Head Slim Light w/ Tripod	5,000 x2	100W	Tripod

120W 360° TOWER LIGHT

111508

- 5,000 K color temperature
- Integrated cord
- 360° and 180° illumination
- 7,500 and 15,000 lumen range

MODEL #	DESCRIPTION	LIGHT TEMPERATURE	IP RATING	WATTS	CORD	FEATURES
111508	15,000 Lumens ProLight™ 360° LED Light Kit	5,000K	IP65	120W	5' - 18/3 SJTW Cord	Included: Floor Stand Tripod Mount, Hook, Two Earth Magnets
111509	15,000 Lumens ProLight™ 360° LED Light Kit with Tripod	5,000K	IP65	120W	5' - 18/3 SJTW Cord	Included: Floor Stand Tripod Mount, Hook, Two Earth Magnets Heavy Duty Tripod

PROLIGHT™ 360° KIT FEATURES *(111508 & 111509)*

HOOK

EARTH MAGNETS

TRIPOD

STAND

LED WOBBLELIGHT®

- 120V
- 5000K color temperature
- Operating temp: -40°F to 125°F
- 5-15 plug

MODEL #	DESCRIPTION	BODY STYLE	WATTS	LAMP LIFE	LINKABLE UNITS	AMP DRAW	CORD TYPE	IP RATING	WEIGHT
111301LED	12,000 lumen 32" LED Wobblelight	32"	150W	50,000 hrs.	6 Max	1.25A	5' 16/3 SJOOW	IP54	31 lbs.
111303LED	15,000 lumen 32" LED Wobblelight	32"	220W	50,000 hrs.	-	1.8A	5' 16/3 SJOOW	IP55	31 lbs.

111301LED

10,000 LUMEN SELF-RIGHTING LED JOBSITE LIGHT

- Daisy chain socket
- Patented self-righting technology
- 360° light output
- 5' power cord
- Intergrated carrying handle
- Heavy-duty steel dome design
- 10,000 lumens | 120Vac 50/60Hz | 90 watts E39 mogul base

MODEL #	DESCRIPTION	BODY STYLE	WATTS	LAMP LIFE	LINKABLE UNITS	AMP DRAW	CORD TYPE	IP RATING	WEIGHT
111211	10,000 Lumen Self-Righting LED Jobsite Light	27"	90	35,000 hrs.	4	0.75A	SJTW	--	18 lbs.

360° LIGHTING

6,000 LUMEN SELF-RIGHTING LED JOBSITE LIGHT

- Patented self-righting technology
- 360° light output
- 5' power cord
- Intergrated carrying handle
- No hot surfaces
- 5000K color temperature
- 6,000 lumens | 120Vac 50/60Hz | 51 watts E39 mogul base

MODEL #	DESCRIPTION	BODY STYLE	WATTS	LAMP LIFE	LINKABLE UNITS	AMP DRAW	CORD TYPE	IP RATING	WEIGHT
111208	6,000 Lumen Self-Righting LED Jobsite Light	25"	51	35,000 hrs.	--	0.42A	SJTW	--	16 lbs.

360° LIGHTING

AREA LIGHTS

WOBBLELIGHT® ACCESSORIES AND REPLACEMENT BULBS.

SPECIFICATIONS

MODEL #	DESCRIPTION	WORKS WITH
111908	85W Fluorescent Bulb	11205
111904	500W Halogen Bulb	111302
111903	400W Metal Halide Bulb	111104
111807	Nylon Reflector Shield	111203, 111204, 111205, 111206
111808	Nylon Reflector Shield	111301LED, 111303LED, 111302, 111102, 111104
111801	Replacement Reflector Dome and Cap	111302, 111102, 111104
1113186	Replacement Reflector Dome and Cap	111301LED, 111303LED
65151701	Replacement Dome and Cap	111205, 111206

ADDITIONAL INTERNAL REPLACEMENT PARTS AVAILABLE

WOBBLELIGHT® 360° LIGHT DISTANCE

WOBBLELIGHT 360° LIGHT DISTANCE

111303LED
Wobblelight® 32 LED
15,000 Lumen
75 FT.

111208
Wobblelight® 25 LED
6,000 Lumen
25 FT.

111301LED
Wobblelight® 32 LED
12,000 Lumen
60 FT.

111211
Wobblelight® 27 LED
10,000 Lumen
45 FT.
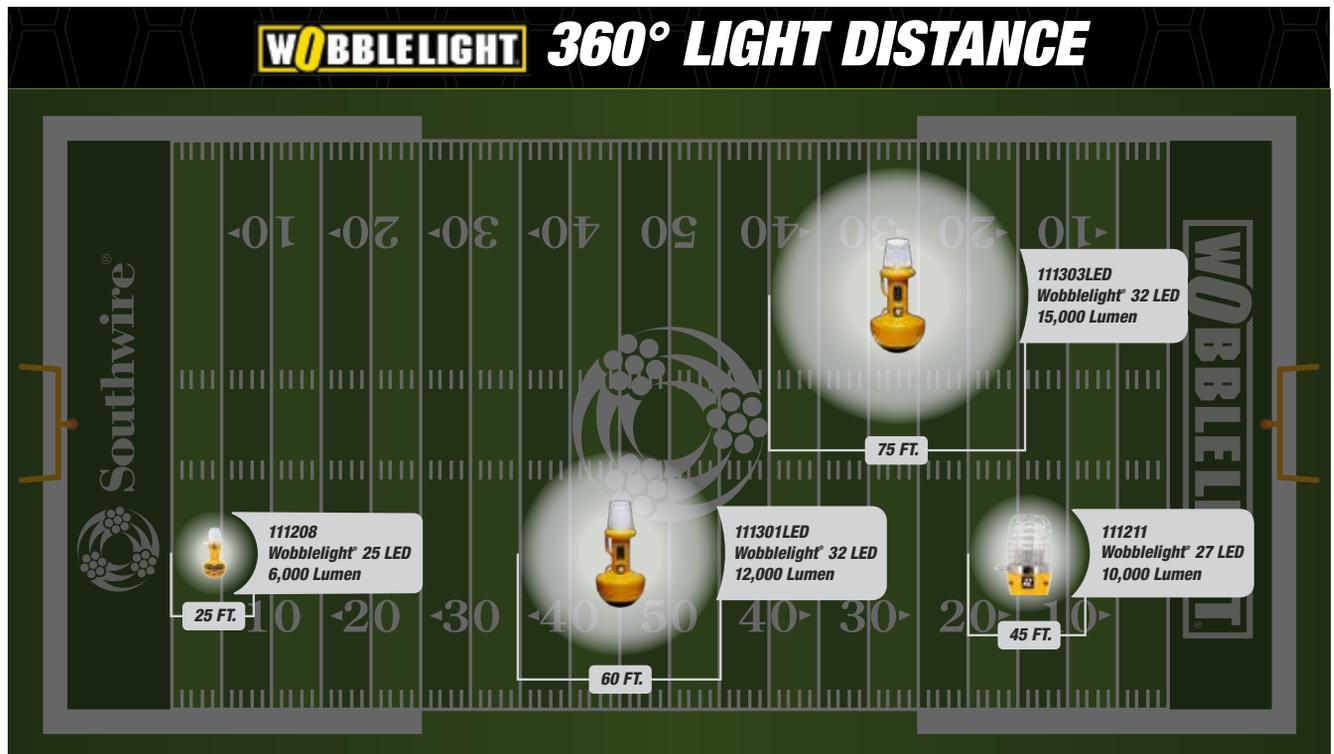
WOODS® ALKALINE BATTERY HAND HELD LIGHT

TLB20020

- Magnetic swivel base
- Spot light in end of light
- Swivel Hanging Hook

UL LISTED

MODEL #	DESCRIPTION	LUMENS	BATTERY TYPE
TLB20020	200 Lumen Handheld Task Light, w/ 3x AA Batteries	200	3x AA Batteries

MEDIUM DUTY TROUBLE LIGHTS

692

c UL us LISTED

MODEL #	DESCRIPTION	CORD LENGTH	CORD	JACKET	OUTLET	GUARD
201	Medium Duty 25' Plastic Trouble Light, 18/2	25'	18/2		No	Plastic
681	Medium Duty 25' Metal Trouble Light, 18/3 w/Outlet	25'	18/3		Yes	Metal
682	Medium Duty 50' Metal Trouble Light, 18/3 w/Outlet	50'	18/3	SJTW	Yes	Metal
691	Medium Duty 50' Metal Trouble Light, 16/3 w/ Outlet	25'	16/3		Yes	Metal
692	Medium Duty 50' Metal Trouble Light, 16/3 w/Outlet	50'	16/3		Yes	Metal
48000	Metal Cord Reel, 40' Metal Trouble Light w/ Outlet	40'	16/3		Yes	Metal

HEAVY DUTY TROUBLE LIGHTS

58588802SW

- Durable oil resistant cord jacket
- Elastomer cord jacket allows for maximum flexibility

c UL us LISTED

MODEL #	DESCRIPTION	CORD LENGTH	CORD	JACKET	OUTLET	GUARD
56578802SW	Heavy Duty Trouble Light, 16/3, 25' SJEOW, Metal Guard, w/ Outlet	25'	16/3		Yes	Metal
56588802SW	Heavy Duty Trouble Light, 16/3, 50' SJEOW, Metal Guard, w/Outlet	50'		SJEOW	Yes	Metal
58578802SW	Heavy Duty Trouble Light, 14/3, 25' SJEOW, Metal Guard, w/ Outlet	25'	14/3		Yes	Metal
58588802SW	Heavy Duty Trouble Light, 14/3, 50' SJEOW, Metal Guard, w/ Outlet	50'			Yes	Metal

HAND HELD LIGHTS

SURGE AND STRIP

In the garage, shop or jobsite work cannot stop to look for an additional receptacle. Heavy duty work solutions from Yellow Jacket and Woods are perfect for places where you need electrical options that can take on almost any environment. With multiple receptacles there is always space to plug in one more tool. Use these with our lighting and extension cords for superior performance.

• 8-Outlet USB Power Block

• 12-Outlet 4 ft. Long Power Strip

• 6-Outlet Metal Power Strip

• 4-Outlet Power Block with GFCI Protection

8-OUTLET USB POWER BLOCK

5148

SPECIFICATIONS:
- 2.4A USB
- Metal Housing
- Integrated Cord Wrap
- Plug Cord Clip
- 2 USB Type-A Ports

MODEL #	UPC	DESCRIPTION	COLOR	# OF OUTLETS	CORD LENGTH (IN FEET)	ELECTRICAL RATINGS	# ITEMS IN MASTER PACK
5148	078693051487	8-Outlet (6+2) USB Power Block	Yellow	8	6	15A 120VAC 60Hz 1800W	4

9-OUTLET, 3' LONG POWER STRIP

4609

SPECIFICATIONS:
- Metal/ABS Housing
- Safety Covers
- Overload Protection
- Mountable
- Lighted Switch

MODEL #	UPC	DESCRIPTION	COLOR	# OF OUTLETS	CORD LENGTH (IN FEET)	ELECTRICAL RATINGS	# ITEMS IN MASTER PACK
4609	078693046094	9-Outlet Power Strip	Black	9	3	15A 125VAC 60Hz 1875W	6

12-OUTLET, 4' LONG POWER STRIP

4612

SPECIFICATIONS:
- Metal/ABS Housing
- Safety Covers
- Overload Protection
- Mountable
- Lighted Switch

MODEL #	UPC	DESCRIPTION	COLOR	# OF OUTLETS	CORD LENGTH (IN FEET)	ELECTRICAL RATINGS	# ITEMS IN MASTER PACK
4612	078693046124	12-Outlet Power Strip	Black	12	6	15A 125VAC 60Hz 1875W	6

SURGE AND STRIP

SURGE AND STRIP

6-OUTLET METAL POWER STRIP WITH 5' CORD

41386

SPECIFICATIONS:
- 2 Adapter Outlets
- Overload Protection
- 5' Cord
- Safety Covers
- Lighted Switch

MODEL #	UPC	DESCRIPTION	COLOR	# OF OUTLETS	CORD LENGTH (IN FEET)	ELECTRICAL RATINGS	# ITEMS IN MASTER PACK
41386	078693413865	6-Outlet Metal Power Strip	Dark Gray	6	5	15A 120VAC 60Hz 1800W	6

6-OUTLET METAL SURGE STRIP WITH 3' CORD, 900 JOULES

41546

SPECIFICATIONS:
- Metal Housing
- Overload Protection
- Safety Covers
- EMI/RFI Noise Filtration
- LED Indicator
- Lighted Switch

MODEL #	UPC	DESCRIPTION	COLOR	# OF OUTLETS	CORD LENGTH (IN FEET)	ELECTRICAL RATINGS	# ITEMS IN MASTER PACK
41546	078693415463	6-Outlet Metal 900J Surge Protector	Dark Gray	6	3	15A 120VAC 60Hz 1800W	6

4-OUTLET POWER BLOCK WITH GFCI PROTECTION

4644

SPECIFICATIONS:
- GFCI Protection
- Individual outlet covers for protection
- Integrated Cord Wrap
- Reset/Test Buttons
- Lighted Switc

MODEL #	UPC	DESCRIPTION	COLOR	# OF OUTLETS	CORD LENGTH (IN FEET)	ELECTRICAL RATINGS	# ITEMS IN MASTER PACK
4644	029892046446	4-Outlet GFCI Power Block	Yellow	4	6	15A 125VAC 60Hz 1875W	4

6-OUTLET METAL POWER STRIP

4658

SPECIFICATIONS:
• All Metal Housing
• Integrated Cord Wrap
• Overload Protection
• Includes Plug Clip
• Lighted Switch
• Mountable

MODEL #	UPC	DESCRIPTION	COLOR	# OF OUTLETS	CORD LENGTH (IN FEET)	ELECTRICAL RATINGS	# ITEMS IN MASTER PACK
4658	078693046582	6-Outlet Metal Power Strip	Yellow	6	10	15A 120VAC 60Hz 1800W	6

4-OUTLET METAL POWER BLOCK

2177N

SPECIFICATIONS:
• Heavy Duty All Metal Housing
• High Visibility Yellow Cord
• Overload Protection
• Mountable
• Cord Clip Plug
• Lighted Switch

MODEL #	UPC	DESCRIPTION	COLOR	# OF OUTLETS	CORD LENGTH (IN FEET)	ELECTRICAL RATINGS	# ITEMS IN MASTER PACK
2177N	078693021770	4-Outlet Metal Power Block	Yellow	4	4	15A 125VAC 60Hz 1875W	4

SURGE AND STRIP

MOBILE POWER/RV

Power quality to you RV is important; you need to protect your yourself and your family in addition to your significant RV investment. RV park power quality can be affected by electrical loads, weather conditions, faulty wiring, and undersized, deteriorating, or mis-wired electrical connections. Southwire's assortment of SurgeGaurd surge protectors, automatic transfer switches, cords, and adapters are designed to power your RV efficiently and safely to protect people and equipment.

• Surge Protection

• Cords

• Adapters

• Standard RV Power Cords
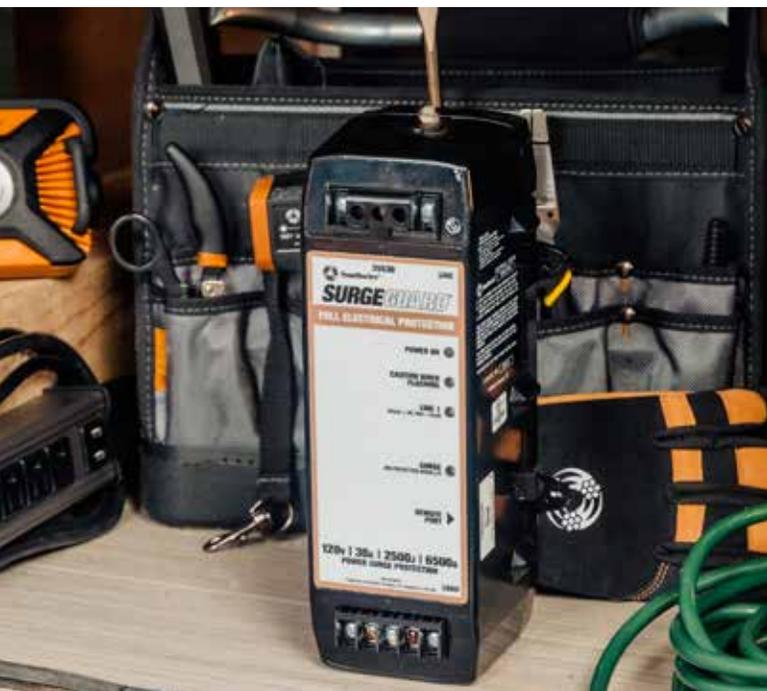
• Cold Weather Flexible Power Cords

RV FLEX50A™ COLD WEATHER FLEXIBLE POWER CORD

Super flexible 50 amp cords, rating from -50 degrees C to +105 degrees C. Outer jacket is Seoprene Thermoplastic Elastomer (TPE). TPE, along with stranded bare copper conductors, makes FLEX50A the best combination of flexibility and durability on the market.

50A15MOSE, 50A30MOSE: 6/3-8/1 cord, SEOW, 6" ROJ
50A15MFSE, 50A30MFSE: 6/3-8/1 cord, M&F ends, SEOW

MODEL #	GAUGE/ CONDUCTOR	JACKET TYPE	LENGTH	AMPS	NEMA PLUG	NEMA RECEPTACLE	LIGHTED ENDS
50A15MOSE	RV Flex50A™ Flexible Power Supply Cord	6/3-8/1	SEOW	15' with 6" pigtail	50	14-50	Pigtail
50A15MFSE	RV Flex50A™ Flexible Extension Cord	6/3-8/1	SEOW	15'	50	14-50	14-50
50A30MOSE	RV Flex50A™ Flexible Power Cord	6/3-8/1	SEOW	30' with 6" pigtail	50	14-50	Pigtail
50A30MFSE	RV Flex50A™ Flexible Power Cord	6/3-8/1	SEOW	30'	50	14-50	14-50

STANDARD RV POWER SUPPLY CORDS

Stripped end makes hardwiring to any connection easy. Male plug end and female plug end are molded. Replaces RV extension cord.

SPECIFICATIONS:
• Weather resistant
• T-Pull handle
• Stripped wire ends to easily connect to hard-wirer device,

MODEL #	GAUGE/ CONDUCTOR	JACKET TYPE	LENGTH	AMPS	NEMA PLUG	NEMA RECEPTACLE	LIGHTED ENDS
30A18MOST	10/3	STW	18"	30	TT-30	Pigtail	Yes
30A18FOST	10/3	STW	18"	30	Pigtail	TT-30	Yes
30A25MOST	10/3	STW	25'	30	TT-30	Pigtail	Yes
30A30MOST	10/3	STW	30'	30	TT-30	Pigtail	Yes
95195508	10/3	STW	30'	30	TT-30	PIGTAIL	NO
50A25MOST	6/3-8/1	STW	25'	50	14-50	PIGTAIL	YES
50A30MOST	6/3-8/1	STW	30'	50	14-50	PIGTAIL	YES
95360008	6/3-8/1	STW	36'	50	14-50	PIGTAIL	NO

MOBILE POWER/RV | CORDS

STANDARD RV & GENERATOR EXTENSION CORD

Super flexible 50 amp cords, rating from -50 degrees C to +105 degrees C. Outer jacket is Seoprene Thermoplastic Elastomer (TPE). TPE, along with stranded bare copper conductors, makes FLEX50A the best combination of flexibility and durability on the market.

50A15MOSE, 50A30MOSE: 6/3-8/1 cord, SEOW, 6" ROJ
50A15MFSE, 50A30MFSE: 6/3-8/1 cord, M&F ends, SEOW

MODEL #	GAUGE/ CONDUCTOR	JACKET TYPE	LENGTH	AMPS	NEMA PLUG	NEMA RECEPTACLE	LIGHTED ENDS
65038901	14/3	STW	25'	15	5-15	(3) 5-15	NO
65039101	12/3	STW	50'	15	5-15	(6) 5-15	NO
65038701	10/3	SJTOW	50'	20	5-20	5-20	NO
65039701	6/3-8/1	STW	30'	50	14-50	14-50	NO
95900008	6/3-8/1	SEW	30'	50	14-50	14-50	NO
50A15MFST	6/3-8/1	STW	15'	50	14-50	14-50	YES
50A30MFST	6/3-8/1	STW	30'	50	14-50	14-50	YES
9208SW8802	12/3	SJTW	50'	20	L5-20	L5-20	NO
9029SW8802	12/3	STW	100'	15	L5-20	L5-20	NO
9209SW8802	12/3	SJTW	100'	15	L5-20	L5-20	NO
65039601	10/3	STW	25'	30	TT-30	TT-30	NO
95707508	10/3	STW	30'	30	TT-30	TT-30	NO
30A10MFST	10/3	STW	10'	30	TT-30	TT-30	YES
30A25MFST	10/3	STW	25'	30	TT-30	TT-30	YES
30A50MFST	10/3	STW	50'	30	TT-30	TT-30	YES
65038801	10/4	STW	25'	30	L14-30	L14-30	NO

REPLACEMENT PLUGS

095215508

65040201

095245508

MODEL #	DESCRIPTION	JACKET TYPE	LENGTH
095235508	30A Replacement Plug	30	TT-30P
65040201	30A Replacement Plug	30	TT-30P
65040301	30A Replacement Receptacle	30	TT-30R
095435508	50A Replacement Plug	50	14-50P
95433308	50A Replacement Plug	50	14-50P

MOBILE POWER/RV | CORDS

RV AND GENERATOR CORD ADAPTERS

Heavy duty 15, 30, and 50 Amp adapters. Constructed of 100% copper.

MODEL #	DESCRIPTION	GAUGE	JACKET TYPE	LENGTH	NEMA RECEPTACLE	NEMA RECEPTACLE
15AM30AF12	15Amp Male to 30Amp Female Adapter	14/3	STW	12"	5-15	TT-30
65040001	5-15 Male to TT-30 Female Adapter	10/3	STW	12"	5-15	TT-30
95429008	5-15 Male to TT-30 Female Adapter	14/3	STW	18"	5-15	TT-30
30AM15AF12	30Amp Male to 15Amp Female Adapter	14/3	STW	12"	TT-30	5-15
95449008	TT-30 Male to 5-15 Female Adapter	14/3	STW	18"	TT-30	5-15
90208802	5-15 Male to L5-20 Female Adapter	12/3	STW	9"	5-15	5-15
90188802	5-15 Male to 5-15 (x2) Female	12/3	STW	24"	5-15	(2) 5-15
90198802	5-15 Male to 5-15 (x3) Female	12/3	STW	24"	5-15	(3) L5-20
90228802	L5-20 Male to L5-20 (x2) Female Adapter	12/3	STW	20"	L5-20	(2) 5-15
90238802	L5-20 Male to L5-20 (x3) Female Adapter	12/3	STW	24"	L5-20	(3) 5-15
90848802	L5-20 Male to 5-15 Female Adapter	12/3	STW	24"	L5-20	(2) 5-15
90218802	L5-20 Male to 5-15 Female Adapter	12/3	STW	9"	L5-20	5-15
65039501	L5-20 Male to 5-15 Female Adapter	12/3	STW	18"	L5-20	5-15 Tritap
65039301	5-15 Male to L5-20 Female Adapter	12/3	STW	9"	5-15	L5-20
65039901	TT-30 Male to 5-20 Female Adapter	10/3	STW	12"	TT-30	5-20
65039201	L14-30 Male to TT-30 Female Adapter	10/3	STW	18"	L14-30	TT-30
L530P30F12	30Amp to generator Twist Lock Adapter	10/3	STW	12"	TT-30	L14-30
95549008	14-50 Male to L5-20 Female Adapter	10/3	STW	18"	14-50	L5-20
19158802	L5-30 Male to 5-20 (x2) Female Adapter	10/3	STOW	36"	L5-30	(2) 5-20
65038601	L14-30 Male to 5-20 (x2) Female Adapter	10/3	STOW	36"	L14-30	(2) 5-20
19248802	L14-20 Male to 5-20 (x2) Female Adapter	12/3	STOW	36"	L14-20	(2) 5-20
19348802	L14-30 Male to 5-20 (x2) Female Adapter	10/4	STOW	36"	L14-30	(2) 5-20
65039401	14-50 Male to TT-30 Female Adapter	10/3	STW	12"	14-50	TT-30
50AM30AF18	50Amp Male to 30Amp Female Adapter	10/3	STW	18"	14-50	TT-30
65039801	TT-30 Male to 14-50 Female Adapter	10/3	STW	12"	TT-30	14-50
95529008	TT-30 Male to 14-50 Female Adapter	10/3	STW	18"	TT-30	14-50
30AM50AF18	30Amp Male to 50Amp Female Adapter	10/3	STW	18"	TT-30	14-50

MOBILE POWER/RV | ADAPTERS

ADAPTERS

AMP UP!™ Y-ADAPTER

SPECIFICATIONS:
- Weather resistant
- T-Pull handle
- 90° Plug

MODEL #	GAUGE/CONDUCTOR	JACKET TYPE	LENGTH	AMPS	NEMA PLUG	NEMA RECEPTACLE
44670	Plugs into a 30A outlet on separate circuits to provides a 240V/50A service outlet	STW	27"	(x1) 50A female receptacle, (x2) 30A male	TT-30	14-50

MOLDED ADAPTERS

095215508

65040401

65040101

95223388

SPECIFICATIONS:
- T-Pull handle
- Heavy duty construction
- Solid copper conductors

MODEL #	DESCRIPTION	JACKET TYPE	SHAPE	JACKET TYPE	LENGTH
09521 55 08	5-15 Male to TT-30 Female	30	Round	5-15	TT-30
09521 TR 08	5-15 Male to TT-30 Female	30	Triangle	5-15	TT-30
09524 55 08	5-15 Male to TT-30 Female	30	Righ Angle	5-15	TT-30
65040401	5-15 Male to TT-30 Female	30	Triangle	5-15	TT-30
65040501	5-15 Male to TT-30 Female	30	Right Angle	5-15	TT-30
95213388	5-15 Male to TT-30 Female	30	Round	5-15	TT-30
95247508	5-15 Male to TT-30 Female	30	Right Angle	5-15	TT-30
65040601	14-50 Male to TT30 Female	30	Round	14-50	TT-30
09522 55 08	TT-30 Male to 5-15 Female	30	Round	TT-30	5-15
09522 TR 08	TT-30 Male to 5-15 Female	30	Triangle	TT-30	5-15
65040101	TT-30 Male to 5-15 Female	15	Round	TT-30	5-15
65040701	TT-30 Male to 14-50 Female	50	Round	TT-30	14-50
95223388	TT-30 Male to 5-15 Female	15	Round	TT-30	5-15
95283388	TT-30 Male to 14-50 Female	50	Round	TT-30	14-50

RV SURGE PROTECTION

SURGE GUARD* SURGE PROTECTION COMPARISON

SELECT THE LEVEL OF PROTECTION THAT YOUR RV NEEDS	FULL PROTECTION					
	30A Portable 34930	50A Portable 34950	30A Portable 34931	50A Portable 34951	30A Portable 35530	50A Portable 35550
Over | Under Voltage (Input)	●	●	●	●	●	●
Open Neutral Protection (Input)	●	●	●	●	●	●
Open Ground Protection	●	●	●	●	●	●
Overheating Plug | Receptacle Protection	●	●	●	●		
Reverse Polarity Protection (Input)	●	●	●	●	●	●
Input & Output Open Neutral Protection	●	●	●	●		
Surge Failure Indication	●	●	●	●	●	●
Miswired Pedestal Indication	●	●	●	●	●	●
Time Delay at Power Up	10 sec.	10 sec.	10 sec.	10 sec.	128 sec.	128 sec.
Compatible with Surge Guard* iOS and Android apps.			●	●		
Optional Remote LCD Display			40301	40301	40300	40300
Over | Under Frequency Protection	●	●	●	●		
Weather Resistant	●	●	●	●		
UL Listed					●	●
Source Power Connection Diagnostics	●	●	●	●	●	●
Lock Hasp Available						
Surge Suppression (Joules)	2,450	4,200	2,450	4,200	2,450	3,850
Max Spike Current (Per MOV)	6,500A	6,500A	6,500A	6,500A	6,500A	6,500A

SURGE GUARD* 30A & 50A BASIC

44260   **44270**

Perfect for pop-ups and travel trailers.

- Identifies faulty park power plus offers surge protection
- Analyzes circuits to verify pedestal wiring
- Tests for and indicates:
  - Open ground
  - Open neutral
  - Correct polarity
- Easy-T-Pull™ handles
- Compatible with Surge Guard* Lock Hasp model 34590

LIMITED LIFETIME WARRANTY

MODEL #	VOLTAGE	AMPS	SURGE SUPPRESSION	LOCK RING INCLUDED
44260	120V	30A	2,100J	No
44270	240V	50A	4,200J	No

MOBILE POWER/RV | RV SURGE PROTECTION

SURGE GUARD* 30A & 50A SURGE+

44280   **44290**

44380   **44390**

Perfect for pop-ups and travel trailers.

- Automatically shuts off the power when equipment Identifies faulty park power and provides surge protection
- Increased receptacle brass thickness reduces heat
- Easy-T-Pull™ handle with integrated receptacle
- Tests for and indicates:
  - Open ground
  - Open neutral
  - Correct polarity
  - Open circuit/no power
  - Missing leg 1/leg 2 voltage *50A only*
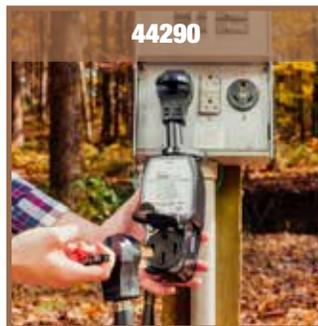 - Surge protection status
  - Overheating plug/receptacle

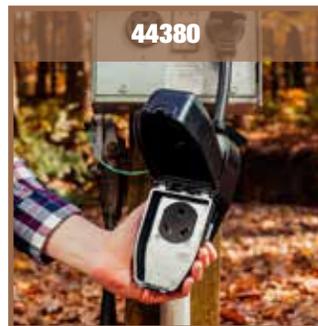**LIMITED LIFETIME WARRANTY**

c **UL** us
LISTED

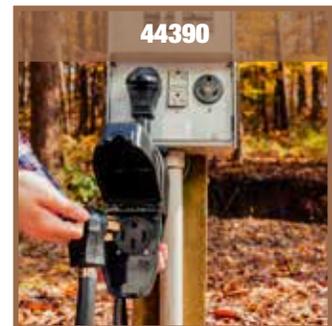| MODEL #	VOLTAGE	AMPS	SURGE SUPPRESSION	LOCK RING INCLUDED	cULus LISTED
44280	120V	30A	2,100J	No	No
44290	240V	50A	4,200J	No	No
44380	120V	30A	2,100J	Yes	Yes
44390	240V	50A	4,200J	Yes	Yes

44280

44290

44380

44390

MOBILE POWER/RV | RV SURGE PROTECTION

SURGE GUARD* 30A & 50A FULL PROTECTION

RV Side Electrical Protection: Total electrical protection from faulty park power and electrical issues inside the RV.

- Provides Protection Against:
  - Power surges
  - Open ground
  - Open neutral
  - Low (<102V) / High (>132V) voltage
  - Overheating plug/receptacle
    - Continuously monitors for and displays:
    - Voltage and Amp Draw (RMS)
  - Reverse polarity
  - Miswired pedestal
  - High neutral current (50A model)
- Elevated ground line current
- Patented - RV side open neutral protection (50A only)
- Automatic reset on power restoration
- 10 second start up sequence
- 128 second reset delay protects A/C compressor
- Easy-T-Pull™ handles

34930   **34950**

34931   **34951**

LIMITED **LIFETIME** WARRANTY

Download on the App Store

GET IT ON Google Play

WORKS WITH SURGE GUARD* IOS AND ANDROID APPS

MODEL #	VOLTAGE	AMPS	SURGE SUPPRESSION	LOCK RING INCLUDED	OPTIONAL REMOTE COMPATIBLE
34930	120V	30A	2,450J	Yes	No
34950	240V	50A	4,200J	Yes	No
34931	120V	30A	2,450J	Yes	Yes
34951	240V	50A	4,200J	Yes	Yes

L1 120V 17A
L2 121V 15A

OPTIONAL ACCESSORY	
40301	Surge Guard*, Wireless Display

40301

The Bluetooth® word mark and logos are registered trademarks of Bluetooth® SIG, Inc. and any use of such marks by Southwire Company, LLC is under license. Apple and the Apple logo are trademarks of Apple, Inc, registered in the U.S. and other countries. App Store is a service mark of Apple, Inc.

34930   34950   34931   34951

RV SURGE PROTECTION

SURGE GUARD* 30A & 50A FULL PROTECTION

35530

35550

Total electrical protection from faulty park power.

• Provides Protection Against:
- • Power surges
- • Open ground
- • Open neutral
- • Low (<102V) / High (>132V) voltage
- • Overheating plug/receptacle
- • Voltage and Amp Draw (RMS)
- • Surge failure
- • Reverse polarity
- • Miswired pedestal
- • High neutral current (50A model)
- • Continuously monitors for and indicates:
• Automatic reset on power restoration
• 128 second reset delay protects A/C compressor
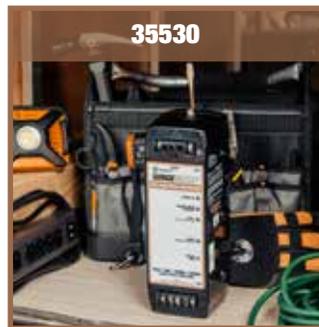
MODEL #	VOLTAGE	AMPS	SURGE SUPPRESSION
35530	120V	30A	2,450J
35550	240V	50A	3,850J

OPTIONAL ACCESSORY	
40300	Surge Guard*, Remote Display

40300

35530
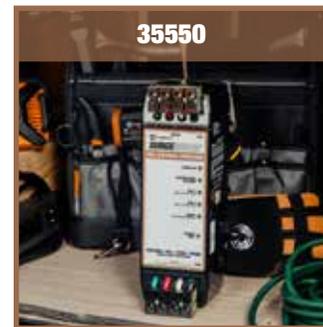
35550

RV TRANSFER SWITCHES

BASIC ATS

41300

40100

SPECIFICATIONS:
- Dual contactor arrangement
- Time delay at power up (3-4 sec.)
- No surge protection
- Generator Dominant

MODEL #	DESCRIPTION	AMPS	CONTACTOR RATING	VOLTS	HERTZ	INTERLOCK	SURGE SUPPRESSION	MAX SPIKE CURRENT	SIZE
41300	30A Basic ATS	30A	30A, FLA	120V	60Hz	Mechanical	NA	NA	6.75"W x 7.62"L x 3.32"W
40100	50A Basic ATS	50A	50A, FLA	120/240V	60Hz	Electric	NA	NA	12.72"W x 16.13"L x 7.78"W

LIMITED ATS

41260

SPECIFICATIONS:
- Surge Protection
- Open Neutral Protection
- Reverse Polarity Protection
- Time Delay at Start up (3-4 sec.)
- Generator Dominant
- Multi-mode surge suppression

MODEL #	DESCRIPTION	AMPS	CONTACTOR RATING	VOLTS	HERTZ	INTERLOCK	SURGE SUPPRESSION	MAX SPIKE CURRENT	SIZE
41260	50A Limited Protection ATS	50A	50A, FLA	120/240V	60Hz	Mechanical	2,600 J	76,400A	8.84"W x 13.5"L x 5.21"W

MOBILE POWER/RV | RV TRANSFER SWITCHES

RV TRANSFER SWITCHES

FULL PROTECTION ATS

40350-RVC

40450-RVC

41390-RVC

SPECIFICATIONS:
- Full Power Protection
- Protects against
- Power surges
- Open ground
- Open neutral
- Low (<102V) / High (>132V) voltage
- Reverse polarity
- Mis-wired pedestal
- High/Low frequency
- RVC Compatible
- Generator Dominant

MODEL #	DESCRIPTION	AMPS	CONTACTOR RATING	VOLTS	HERTZ	INTERLOCK	SURGE SUPPRESSION	MAX SPIKE CURRENT	SIZE
40350-RVC*	50A Full Protection ATS	50A	65A, FLA	120/240V	60Hz	Mechanical	3350 J	130,000A	8.84"W x 13.5"L x 5.21"W
40450-RVC	50A Full Protection ATS	50A	65A, FLA	120/240V	60Hz	Mechanical	3350 J	130,000A	8.84"W x 13.5"L x 5.21"W
41390-RVC*	90A Full Protection ATS	50A	95A, FLA	120/240V	60Hz	Mechanical	3350 J	130,000A	12.3"W x 19.12"L x 6.14"W

*Remote Panel Compatible

RV ACCESSORIES

REMOTE POWER MONITOR DISPLAY

40299

Provides detailed information about incoming line voltages, current used, fault conditions.

MODEL #	DESCRIPTION	WORKS WITH ATS MODELS	CONNECTOR
40299	Remote Power Display Panel	40350, 41390	RJ12 (6pin)

GENERATOR NEUTRAL-GROUND BONDING PLUG

44400

Provides neutral to ground bond to resolve open ground condition.

MODEL #	DESCRIPTION	AMPS
44400	Ground Neutral Bonding Plug	15A

LOCK HASP

34590

Locking device prevents unauthorized removal Durable resin housing, Works with 30A and 50A plugs.

MOBILE POWER/RV | RV ACCESSORIES

SHORELINE REELS

ELECTRICAL CORD REELS

RH54331RMK

RL54331LMK

MODEL #	DESCRIPTION	CORD	APPLICATION	DIMENSIONS
RH54331RMK	50A Motorized Cord Reel - Narrow	Includes 33' 50A, 6/3-8/1 Flexible cord	Class A or Super C motor Homes	12" W X 14" D X 16" H
RL54331LMK	50A Motorized Cord Reel - Low Profile	Includes 33' 50A, 6/3-8/1 Flexible cord	Low compartments or frame of 5th wheel	17" W X 10.5" D X 11.5" H
RSRM	Motorized Cord Storage Reel	Works with detachable cords; can hold 40' of 50A power cord, or 75' of 30A	Ceiling or wall mount	

HOSE REELS

RW40RMK

SPECIFICATIONS:
- Powered by drive motor
- Spool and core
- Anodized aluminum
- Side frame powder coated galvanized steel
- Rotator and fittings
- Brass (no plastic parts)

MODEL #	DESCRIPTION	LENGTH	AMPS	FEATURES
RW40RMK	RV Drinking Water Hose Reel	40' - 1/2" diameter hose	4-6 Amps	Motorized reel is IAMPR approved to NSF standards and provides kink free drinking water connection.
RB20RMK	RV Black Water Hose Reel	20' - 1/2" diamter hose	4-6 Amps	Connects to macerator pump, 4-6 amps motorized real eliminates tangles and with integrated ball valve eliminates the need for caps and plugs

ACCESSORIES

MODEL #	DESCRIPTION	APPLICATION	FEATURES
RV2100	Switch Kit	For use on all Shoreline Reel products	Rocker switch with mounting box and strain relief
RV2060	Large Floor Hatch & Roller Kit	Mouse hole for cord exit	Rollers on all side, opening 5" x 6"
RV2061	Small Floor Hatch & Roller Kit	Mouse hole for cord exit	Rollers on all side, opening 4" x 5"
RV2050	Round Hatch & Roller Kit	50A plug pass through	180º rollers with an 3.5" opening with 90º angle bracker for under coach mounting

EXTENSION CORDS

Southwire extension cords are perfect for multiple indoor and outdoor applications. We offer cords in variety of colors to increase visibility. Along with our cords we have cord organization options for keeping bulky extension cords, ropes, and holiday lighting tangle free. We have a massive selection of products that are perfect for your home garage needs.

• Extension Cord Management

• Extension Cord Reels

• Wall and Ceiling Mount Cord Reels

• Industrial Cord Reels

• Outdoor Extension Cords

• Agripro® Extension Cords

• Royal® Extension Cords

• ColdFlex™ Cold Weather Extension Cords

S-LOCK PLUG LOCK

E105

SPECIFICATIONS:
- Hanging hole for easy storage
- Heavy duty weather resistant construction
- Prevents disconnection of cords during use
- Extends cord life, no need to tie cords together

H-FRAME STORAGE WRAP WITH (X3) INTEGRATED OUTLETS

64827801

SPECIFICATIONS:
- Holds 50' of 12/3 or 14/3 cord.
- Outlets are 5-15R

H-FRAME CORD WRAP

2803

SPECIFICATIONS:
- Clips to hold cord ends in place
- Convenient mounting hole
- Strong H-Frame
- Holds up to 100 ft. of 16/3 gauge cord

STORAGE WRAP WITH STAND

3202

SPECIFICATIONS:
- Built-in carry handle allows this extension cord reel to be easily portable
- Mounting hole for organized storage
- Notches to hold cord ends in place
- Easy-to-use snap on stand included
- Prevents disconnection of cords during use
- Extends cord life, no need to tie cords together

LARGE H-FRAME CORD WRAP

E101

SPECIFICATIONS:
- Secure clips to hold cord ends in place
- Built-in carry handle for easier transportation
- Mounting hole for organized wall storage
- Tangle free H-Frame

EXTENSION CORD MANAGEMENT

CORD REEL WITH STAND

E103

SPECIFICATIONS:
- Holds up to 150' of 16/3 cord, 125' of 14/3
- Tangle free storage - for storage of extension cords, holiday lighting, rope, hose, light wire

SPINNING CORD REEL

E102

SPECIFICATIONS:
- Holds 125' of 14/3 Cord
- Tangle free storage - for storage of extension cords, holiday lighting, rope, hose, light wire

LARGE SPINNING CORD REEL

547702

SPECIFICATIONS:
- Holds 150' of 16/3 Cord
- Tangle free storage - for storage of extension cords, holiday lighting, rope, hose, light wire

EXTENSION CORD REEL

22849

SPECIFICATIONS:
- Holds up to 50' of 12/3 cord, 70' of 14/3 cord
- Durable metal stand
- Easy grip handle

EXTENSION CORD REEL WITH POWER STATION

E230

SPECIFICATIONS:
- 5-15 Outlets, holds up to 50' of 12/3 cord, 70' of 14/3 cord
- Converts most extension cords into 4-outlet power block
- Easy grip handle

RESIN PORTABLE EXTENSION CORD POWER STATIONS

SPECIFICATIONS:
• Integrated on off switch
• (x4) 5-15 grounds receptacles
• Built in circuit breaker

MODEL #	Description	Cord	Jacket	Length	Amps	Plug End	Plug End
E231	Resin extension cord reel with 4 outlets	16/3	SJTW	20'	12	5-15	5-15
2801	Resin extension cord reel with 4 outlets	16/3	SJTW	25'	10	5-15	5-15
4907	Resin extension cord reel with 4 outlets	16/3	SJTW	25'	12	5-15	5-15

PORTABLE EXTENSION CORD POWER STATIONS

SPECIFICATIONS:
• Lighted ends
• Integrated on off switch
• (x6) 5-15 grounds receptacles
• Built in circuit breaker
• Durable metal stand

MODEL #	Description	Cord	Jacket	Length	Amps	Plug End	Plug End
E235	Extension cord reel with metal stand and 6 outlets	14/3	SJTW	50'	15	5-15	5-15
E238	Extension cord reel with metal stand and 6 outlets	12/3	SJTW	50'	15	5-15	5-15

HANGING EXTENSION CORD REEL

Excellent for temporary work areas and garages.

SPECIFICATIONS:
E216:
• One grounded outlet on light
• On off push switch on light

E315:
• (x3) 5-15 outlets

MODEL #	Description	Cord	Jacket	Length	Amps	Plug End	Plug End
E315	Resin extension cord reel with hanging hook and banana plug	16/3	SJTW	20'	15	5-15	5-15 Tritap
E216	Resin extension cord reel with hanging hook and light	16/3	SJTW	20'	15	5-15	Light with 5-15 plug in handle

WALL AND CEILING MOUNT CORD REELS

SPECIFICATIONS:
- Rugged construction
- Mounts on wall or ceiling
- Mounting hardware included

MODEL #	Description	Cord	Jacket	Length	Amps	Plug End	Plug End
E215	Metal celing or wall mount cord reel	16/3	SJTW	30'	13	5-15	5-15 Tritap
48006SW	Metal celing or wall mount cord reel	14/3	SJTW	30'	15	5-15	5-15 Tritap
E316	Resin ceiling or wall mount cord reel	14/3	SJTW	45'	15	5-15	5-15 Tritap
48208802SW	Resin ceiling or wall mount cord reel	12/3	SJTW	50'	15	5-15	5-15 Tritap
48000	Metal celing or wall mount cord reel with metal trouble light	14/3	SJTW	40'	13	5-15	Light with 5-15 plug in handle
48004	Metal celing or wall mount cord reel	14/3	SJTW	30'	15	5-15	5-15

INDUSTRIAL CORD REELS

INDUSTRIAL CORD REELS

SPECIFICATIONS:
- All steel construction is rugged and durable, providing maximum structural strength
- Long-life, high-quality drive spring is enclosed for protection against the environment
- A baked-on powder coated finish on steel components provides maximum corrosion resistance
- Adjustable guide arm allows reel to mount on ceiling, wall, bench or floor
- Stamped steel reel cable spool has angled edges to protect cord and provide additional strength
- Highest quality spring steel drive spring has several free coils in the center, forming a smooth radius that engages the spring arbor for maximum performance and life
- NEMA 5-20R
- Truck mountable

MODEL #	Description	Cord	Jacket	Length	Amps	Plug End	Plug End
R112318845	20A Industrial cord reel	12/3	SJEOW	45'	20	5-20	5-20
R112718845	Industrial cord reel with duplex GFCI outlet box	12/3	SJEOW	45'	20	5-20	5-20
R112308845	15A Industrial spring retractable cord reel	12/3	SJEOW	45'	15	5-15	5-15

INDUSTRIAL CORD REELS

OUTDOOR EXTENSION CORDS

OUTDOOR EXTENSION CORDS WITH POWER LIGHT INDICATOR

2488SW8804

541901

2577SW000H

2577SW000X

547703

SPECIFICATIONS:
- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 Voltage Rating
- Available in custom colors

STOCK #	GAUGE/ CONDUCTORS	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
540836**	14/3	STW	3'	0.9 M	RED/BLACK	15	12
541901**	14/3	SJTW	22'	7 M	RED/BLACK	15	6
2487SW8804	14/3	SJTW	25'	7.6 M	RED	15	12
2488SW8804	14/3	SJTW	50'	15.2 M	RED	15	6
541902**	14/3	SJTW	50'	15.2 M	RED/BLACK	15	5
54800401**	14/3	SJTW	50'	15.2 M	NEON PINK	13	13
521*	14/3	SJTW	50'	15.2 M	YELLOW/BLACK	15	13
2489SW8804	14/3	SJTW	100'	30.5 M	RED	13	6
541909**	14/3	SJTW	100'	30.5 M	RED/BLACK	15	3
2577SW000H	12/3	SJTW	25'	7.6 M	COOL BLUE	15	12
2577SW000X	12/3	SJTW	25'	7.6 M	COOL GREEN	15	12
547703**	12/3	SJTW	25'	7.6 M	DARK GREEN/YELLOW	15	12
2577SW000A	12/3	SJTW	25'	7.6 M	COOL PINK	15	12
2587SW8802	12/3	SJTW	25'	7.6 M	YELLOW	15	12
2578SW000H	12/3	SJTW	50'	15.2 M	COOL BLUE	15	8
2548SW0064	12/3	SJTW	50'	15.2 M	COOL BLUE/RED	15	8
2548SW00HX	12/3	SJTW	50'	15.2 M	COOL BLUE/COOL GREEN	15	8
2548SW0052	12/3	SJTW	50'	15.2 M	DARK GREEN/YELLOW	15	8
2548SW0054	12/3	SJTW	50'	15.2 M	LIME GREEN/RED	15	8
2578SW000X	12/3	SJTW	50'	15.2 M	COOL GREEN	15	8
2548SW003V	12/3	SJTW	50'	15.2 M	COOL ORANGE/COOL BLUE	15	8
2578SW000A	12/3	SJTW	50'	15.2 M	COOL PINK	15	8
2548SW0077	12/3	SJTW	50'	15.2 M	COOL PINK/LIME GREEN	15	8
2548SW0041	12/3	SJTW	50'	15.2 M	RED/WHITE	15	8
2588SW0002	12/3	SJTW	50'	15.2 M	YELLOW	15	6
2548SW0022	12/3	SJTW	50'	15.2 M	YELLOW/PURPLE	15	8
550523* **	12/3	SJTW	50'	15.2 M	YELLOW/BLACK	15	6
25850002	12/3	SJTW	80'	24.4 M	YELLOW	15	4
2549SW0064	12/3	SJTW	100'	30.5 M	COOL BLUE/RED	15	4
2579SW000H	12/3	SJTW	100'	30.5 M	COOL BLUE	15	4
2549SW0054	12/3	SJTW	100'	30.5 M	LIME GREEN/RED	15	4
2579SW000X	12/3	SJTW	100'	30.5 M	COOL GREEN	15	4
2549SW0052	12/3	SJTW	100'	30.5 M	DARK GREEN/YELLOW	15	4
2549SW003V	12/3	SJTW	100'	30.5 M	COOL ORANGE/COOL BLUE	15	4
2549SW0077	12/3	SJTW	100'	30.5 M	COOL PINK/LIME GREEN	15	4
2579SW000A	12/3	SJTW	100'	30.5 M	COOL PINK	15	4
2549SW0041	12/3	SJTW	100'	30.5 M	RED/WHITE	15	4
2549SW0022	12/3	SJTW	100'	30.5 M	YELLOW/PURPLE	15	4
2589SW0002	12/3	SJTW	100'	30.5 M	YELLOW	15	4
2687SW0002	10/3	SJTW	25'	7.6 M	YELLOW	15	6
26480064	10/3	SJTW	50'	15.2 M	COOL BLUE/RED	15	4
26480054	10/3	SJTW	50'	15.2 M	LIME GREEN/RED	15	4
2688SW0002	10/3	SJTW	50'	15.2 M	YELLOW	15	4
26490064	10/3	SJTW	100'	30.5 M	COOL BLUE/RED	15	3
26490054	10/3	SJTW	100'	30.5 M	LIME GREEN/RED	15	3
2689SW0002	10/3	SJTW	100'	30.5 M	YELLOW	15	3

*BLACK PLUGS   **PRODUCT PACKAGING IS ADVERTISED IN METERS

OUTDOOR EXTENSION CORDS

TRITAP EXTENSION CORDS

TRITAP EXTENSION CORDS

SPECIFICATIONS:
- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 Voltage Rating

MODEL #	GAUGE/CONDUCTOR	JACKET TYPE	LENGTH	AMPS	NEMA PLUG	NEMA RECEPTACLE	LIGHTED ENDS	COLOR
4217SW8804	14/3	SJTW	25'	15	5-15	(3) 5-15	No	Red
4218SW8804	14/3	SJTW	50'	15	5-15	(3) 5-15	No	Red
4219SW8804	14/3	SJTW	100'	13	5-15	(3) 5-15	No	Red
4187SW8802	12/3	SJTW	25'	15	5-15	(3) 5-15	Yes	Yellow
4188SW8802	12/3	SJTW	50'	15	5-15	(3) 5-15	Yes	Yellow
4189SW8802	12/3	SJTW	100'	15	5-15	(3) 5-15	Yes	Yellow
4388SW8802	10/3	SJTW	50'	15	5-15	(3) 5-15	Yes	Yellow
4389SW8802	10/3	SJTW	100'	15	5-15	(3) 5-15	Yes	Yellow

TRITAP EXTENSION CORDS

AGRIPRO™ OIL RESISTANT CORDS

AGRIPRO™ extension cords are ideal for farm, ranch, and workshop jobs.

SPECIFICATIONS:
• Temperature Rating of -58°F to 221°F (-50°C to 105°C)
• 125 Voltage Rating
• Abrasion, chemical and oil resistant

MODEL #	GAUGE/CONDUCTOR	JACKET TYPE	LENGTH	AMPS	NEMA PLUG	NEMA RECEPTACLE	LIGHTED ENDS	COLOR
12270008	16/3	SJEOW	25'	13	5-15	5-15	No	Black
12280008	16/3	SJEOW	50'	13	5-15	5-15	No	Black
64815701	14/3	SJTOW	25'	15	5-15	5-15	No	Black
64816001	14/3	SJTOW	50'	15	5-15	5-15	No	Black
64816301	14/3	SJTOW	100'	13	5-15	5-15	No	Black
67729001	12/3	SJTOW	25'	15	5-15	5-15	No	Black
64816901	12/3	SJTOW	50'	15	5-15	5-15	No	Black
64817201	12/3	SJTOW	100'	15	5-15	5-15	No	Black
64817501	10/3	SJTOW	25'	15	5-15	5-15	No	Black
64817801	10/3	SJTOW	50'	15	5-15	5-15	No	Black
64818101	10/3	SJTOW	100'	15	5-15	5-15	No	Black

TRITAP EXTENSION CORDS

MODEL #	GAUGE/ CONDUCTORS	WIRE TYPE	LENGTH (FT)	LENGTH (M)	COLOR	AMPS	CASE PACK QUANTITY
54533501* **	14/3	SJOW	15'	4.6 m	Black	15	18
2451	14/3	SJTOW	25'	7.6 m	Black	15	12

*Lighted Banana Receptacle
**Product packaging is advertised in Meters

ROYAL® WELDING CORDS

Royal® extension cords are resistant to welding slag and are the most flexible extension cord on the market.

SPECIFICATIONS:
• Temperature Rating of -40°F to 194°F (-40°C to 90°C)
• 125 Voltage Rating
• Abrasion, chemical, and oil resistant

WE'VE GOT IT
MADE IN AMERICA™

MODEL #	GAUGE/CONDUCTOR	JACKET TYPE	LENGTH	AMPS	NEMA PLUG	NEMA RECEPTACLE	LIGHTED ENDS	COLOR
3677SW0008	12/3	SJOOW	25'	15	5-15	5-15	Yes	Black
3678SW0008	12/3	SJOOW	50'	15	5-15	5-15	Yes	Black
3679SW0008	12/3	SJOOW	100'	15	5-15	5-15	Yes	Black

POLAR/SOLAR® SUPREME

Polar/Solar® Supreme extension cords are formulated to offer superior jobsite performance in extremely cold weather.

SPECIFICATIONS:
• Temperature Rating of -94°F to 221°F (-70°C to 105°C)
• 125 Voltage Rating
• Abrasion, chemical and oil resistant

WE'VE GOT IT
MADE IN AMERICA™

STOCK #	GAUGE/CONDUCTORS	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
1437SW0061	14/3	SJEOW	25'	7.6 M	BLUE/WHITE	15	12
1438SW0061	14/3	SJEOW	50'	15.2 M	BLUE/WHITE	15	6
1439SW0061	14/3	SJEOW	100'	30.5 M	BLUE/WHITE	13	6
1637SW0061	12/3	SJEOW	25'	7.6 M	BLUE/WHITE	15	12
1638SW0061	12/3	SJEOW	50'	15.2 M	BLUE/WHITE	15	6
1639SW0061	12/3	SJEOW	100'	30.5 M	BLUE/WHITE	15	4

COLDFLEX™ COLD WEATHER CORDS

COLDFLEX™ COLD WEATHER CORDS

ColdFlex™ extension cords withstand harsh, winter temperatures, and have a highly visible bright blue jacket to increase safety.

SPECIFICATIONS:
- Temperature Rating of -58°F to 140°F (-50°C to 60°C)
- 125 Voltage Rating

| MODEL #	GAUGE/ CONDUCTOR	JACKET TYPE	LENGTH	AMPS	NEMA PLUG	NEMA RECEPTACLE	LIGHTED ENDS	COLOR
2367SW8806	16/3	ColdFlex™ SJTW	25'	13	5-15	5-15	Yes	Blue
2368SW8806	16/3	ColdFlex™ SJTW	50'	13	5-15	5-15	Yes	Blue
2436	16/3	ColdFlex™ SJTW	100'	10	5-15	5-15	Yes	Blue
2467SW8806	14/3	ColdFlex™ SJTW	25'	15	5-15	5-15	Yes	Blue
2468SW8806	14/3	ColdFlex™ SJTW	50'	15	5-15	5-15	Yes	Blue
2469SW8806	14/3	ColdFlex™ SJTW	100'	13	5-15	5-15	Yes	Blue
2437	12/3	ColdFlex™ SJTW	25'	15	5-15	5-15	Yes	Blue
2568SW0006	12/3	ColdFlex™ SJTW	50'	15	5-15	5-15	Yes	Blue
2569SW0006	12/3	ColdFlex™ SJTW	100'	15	5-15	5-15	Yes	Blue

TRITAP EXTENSION CORDS W/ POWER LIGHT INDICATOR

| MODEL #	GAUGE/ CONDUCTORS	WIRE TYPE	LENGTH (FT)	LENGTH (M)	COLOR	AMPS	CASE PACK QUANTITY
32678806	14/3	ColdFlex™ SJTW	25'	7.6 m	Blue	15	6
32688806	14/3	ColdFlex™ SJTW	50'	15.2 m	Blue	15	6
41688806	12/3	ColdFlex™ SJTW	50'	15.2 m	Blue	15	6

MOUNTABLE CABLE TIES

Southwire heavy-duty mountable cable ties offer a fast, innovative, and economical way to bundle, secure and support cables. These products are ideal for low voltage and general electrical applications, making them perfect for your garage or worksite.
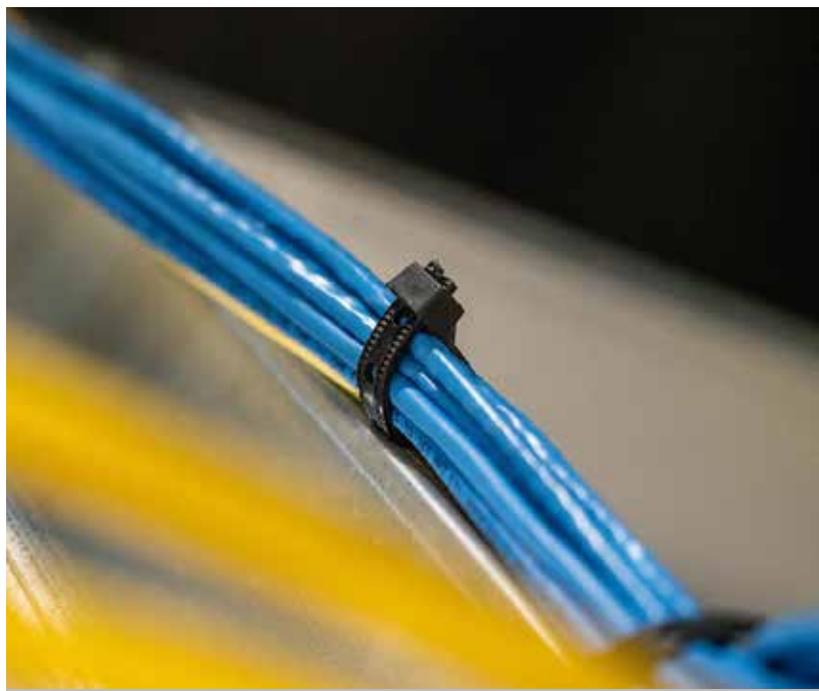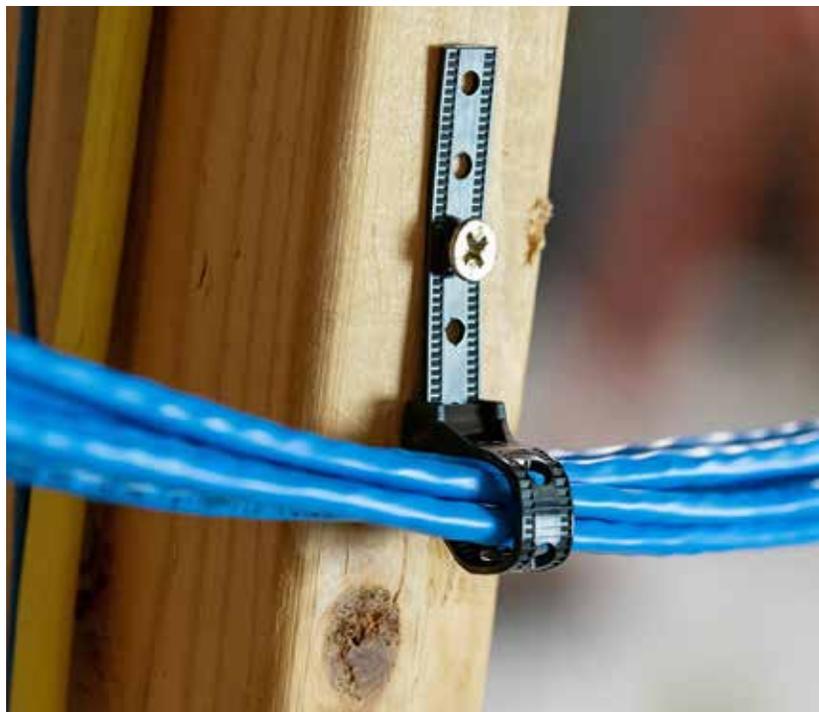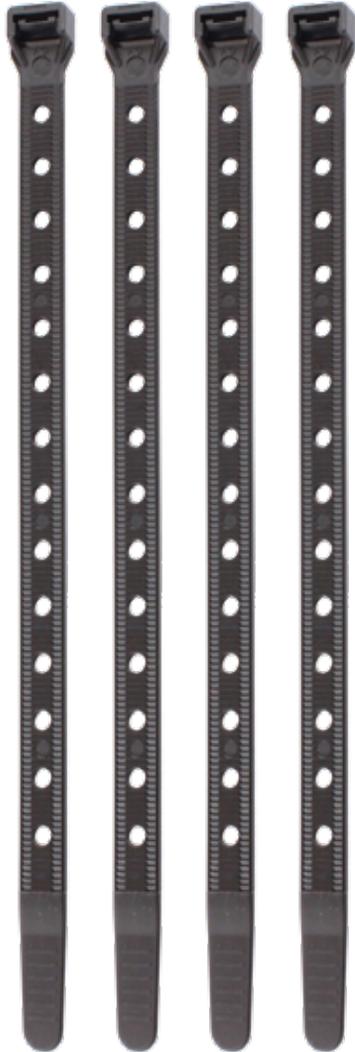
CABLE TIES

These patented ties are designed with unique, integral mounting holes, which allows for convenient mounting via screw or nail without splitting the tie itself. The larger-than-traditional tie width reduces the risk of cable jacket damage and deformation.

SPECIFICATIONS:
- Constructed from UV-resistant Nylon 6,6, the rugged, heavy-duty mountable cable ties are rated for indoor or outdoor use and can withstand temperatures ranging from -40°F (-40°C) to 185°F (85°C).
- Currently available in 8", 11" and 14" lengths with a heavy-duty 50lb or extra heavy-duty 90lb loop tensile strength. Also available in releasable reusable varieties.

MODEL #	DESCRIPTION
58298840	8" Mountable Cable Tie with 50LB. Tensile Strength, 15-Pack
58298940	11" Mountable Cable Tie with 50LB. Tensile Strength, 15-Pack
58299040	14" Mountable Cable Tie with 50LB. Tensile Strength, 15-Pack
58298240	8" Mountable Cable Tie with 50LB. Tensile Strength, 100-Pack
58298340	11" Mountable Cable Tie with 50LB. Tensile Strength, 100-Pack
58298440	14" Mountable Cable Tie with 50LB. Tensile Strength, 100-Pack

CLAMP TIES

Southwire Clamp Tie, Adjustable Cable Organizers are the perfect tool for organizing, carrying or storing extension cords, conduit, hoses, booster cables and more! Offered in 2", 3" and 4" max bundle diameters to accept a wide range of coil sizes.
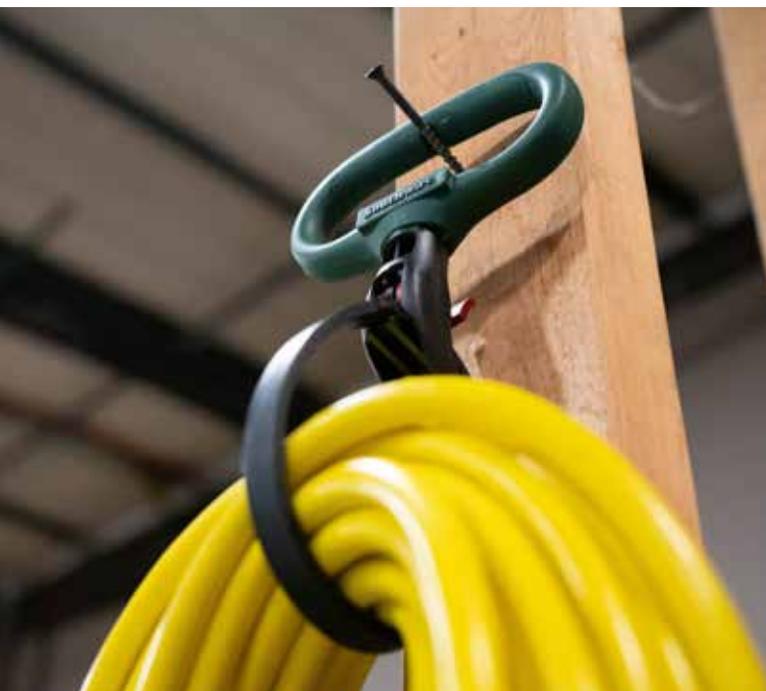
CLAMP TIE/ADJUSTABLE CABLE ORGANIZERS

CLAMP TIE/ADJUSTABLE CABLE ORGANIZERS

FEATURES:
- Heavy duty carrying handle rotates 360°
- Integrated hanging notch on handle allows for easy storage
- Easy release trigger
- Flexible tie design firmly secures anything you are carrying

SPECIFICATIONS:
- Available in 2", 3" and 4" max bundle diameters
- 50LB, 100LB and 150LB tensile strength ratings

MODEL #	DESCRIPTION
58299240	2" Clamp Tie, Adjustable Cable Organizer, Brown
58299340	3" Clamp Tie, Adjustable Cable Organizer, Brown
58299440	4" Clamp Tie, Adjustable Cable Organizer, Brown
58973240	2" Clamp Tie, Adjustable Cable Organizer, Green
58973340	3" Clamp Tie, Adjustable Cable Organizer, Green
58973440	4" Clamp Tie, Adjustable Cable Organizer, Green

CLAMP TIES

CABLE PROTECTION SYSTEMS

Southwire® Cable Protection Systems

CABLE PROTECTION SYSTEMS

SOUTHWIRE® CABLE PROTECTION SYSTEMS

A complete cable protection system. Perfect for any application where cables are in harms way. Eliminates downtime, costly repairs and reduces liability.

APPLICATIONS FOR

- Entertainment Industry
- Institutions and Municipalities
- Industrial, Construction & Utilities

3 Channel Linear
31205-1

3 Channel Right & Left
31206-1, 31207-1

3 Channel End Cap
31208-1

MODEL #	DESCRIPTION	CHANNEL QTY	LENGTH (IN.)	WIDTH (IN.)	HEIGHT (IN.)	CHANNEL SIZE (H X W)	WEIGHT (LBS)	LOAD CAPACITY / PER AXLE CAP (LBS)	BASE MATERIAL	CABLE LID
31200-1	Linear	5	35.4375	23.625	2.95	1.96" x 1.38"	52.9	42000/21000	Rubber	EVA (plastic)
31201-1	Left Turn	5	23.625	24.41	2.95	1.96" x 1.38"	24.7	42000/21000	Rubber	EVA (plastic)
31202-1	Right Turn	5	23.625	24.41	2.95	1.96" x 1.38"	24.7	42000/21000	Rubber	EVA (plastic)
31203-1	End Cap (2)	5	7.87	23.625	2.95	1.96" x 1.38"	17.7	42000/21000	Rubber	EVA (plastic)
31205-1	Linear	3	35.4375	23.625	2.95	1.96" x 2.09"	52.9	42000/21000	Rubber	EVA (plastic)
31206-1	Left Turn	3	23.625	24.41	2.95	1.96" x 2.09"	24.7	42000/21000	Rubber	EVA (plastic)
31207-1	Right Turn	3	23.625	24.41	2.95	1.96" x 2.09"	24.7	42000/21000	Rubber	EVA (plastic)
31208-1	End Cap (2)	3	7.87	23.625	2.95	1.96" x 2.09"	17.7	42000/21000	Rubber	EVA (plastic)

GROUND FAULT CIRCUIT INTERRUPTERS (GFCI)

GFCI Right Angle Single Outlet Cord Sets Manual Reset

GFCI In-Line Cord Sets Manual Reset

In-Line GFCI with Tri-Tap Manual Reset

Cord-Connected Portable GFCI with Duplex/Quad GFCI Receptacles

15A SINGLE OUTLET RIGHT ANGLE ADAPTERS

Provides GFCI and single mode surge protection with any appliance or tool used indoors.

- GFCI with 4-6mA trip point
- 25mS trip response time
- Manual reset
- Provides compliance with NEC 2008 Article 590.6 for Temporary Installations
- Small Size (less than 3" high and 2" wide) make it perfect for the toolbox
- Applications: Institutional and residential

14650013-6

MODEL #	ELECTRICAL RATING			COLOR	RECEPTACLE COUNT	PLUG & RECEPTACLE TYPE
14650006-6	120V	15A	60Hz	White	Single	NEMA 5-15
14650013-6	120V	15A	60Hz	Yellow	Single	
14650032-6	120V	15A	60Hz	Black	Single	

15A RIGHT ANGLE CORD SETS

Shockshield™ Right Angle GFCI ensures protection from dangerous current leakage that can cause electrical shock and possible electrocution.

- GFCI with 4-6mA trip point
- 25mS trip response time
- Manual reset
- Provides compliance with NEC 2008 Article 590.6 for Temporary Installations
- Custom cable gauges, lengths and terminations available by special order
- Applications: Plant maintenance, equipment service and construction sites

14880024-3

MODEL #	ELECTRICAL RATING			CORD LENGTH	CORD GAUGE	WIRE TYPE	CORD COLOR	RECEPTACLE COUNT	LIGHTED RECEPTACLE	PLUG & RECEPTACLE TYPE
14880024-3	120V	15A	60Hz	6'	14/3 AWG	SJTW	Yellow	Single	No	NEMA 5-15
14880023-6	120V	15A	60Hz	2'	12/3 AWG	SJTW	Yellow	Triple	Yes	
14880004-6	120V	15A	60Hz	6'	12/3 AWG	SJTW	Yellow	Triple	No	
14880119-1	120V	15A	60Hz	50'	12/3 AWG	SJTW	Yellow	Triple	No	
14880120-1	120V	15A	60Hz	99'	12/3 AWG	SJTW	Yellow	Triple	No	
14880228-6	120V	15A	60Hz	25'	12/3 AWG	SJEOW	Yellow	Triple	No	
14880229-6	120V	15A	60Hz	50'	12/3 AWG	SJEOW	Yellow	Triple	No	
14880230-4	120V	15A	60Hz	100'	12/3 AWG	SJEOW	Yellow	Triple	No	

GFCI | CORD-CONNECTED

GFCI

15A | 20A IN-LINE CORD SETS

26020008-6

Shockshield™ In-Line GFCI ensures protection from dangerous current leakage that can cause electrical shock and possible electrocution.

- GFCI with 4-6mA trip point
- 25mS trip response time
- Manual reset
- Provides compliance with NEC 2008 Article 590.6 for Temporary Installations
- Custom cable gauges, lengths and terminations available by special order
- Applications: Plant maintenance, equipment service, and construction sites

c(UL)us LISTED

MODEL #	ELECTRICAL RATING			CORD LENGTH	CORD GAUGE	WIRE TYPE	CORD COLOR	RECEPTACLE COUNT	LIGHTED RECEPTACLE	PLUG & RECEPTACLE TYPE
26020002-6	120V	15A	60Hz	2'	14/3 AWG	SJTW	Yellow	Single	No	NEMA 5-15
26020121-6	120V	15A	60Hz	2'	14/3 AWG	SJTW	Yellow	Single	Yes	
26020050-1	120V	15A	60Hz	50'	14/3 AWG	SJTW	Yellow	Single	No	
26020011-6	120V	15A	60Hz	2'	12/3 AWG	SJTW	Yellow	Single	No	
26020150-1	120V	15A	60Hz	50'	12/3 AWG	SJTW	Yellow	Single	No	
26020008-6	120V	15A	60Hz	2'	12/3 AWG	SJTW	Yellow	Triple	Yes	
26020148-1	120V	15A	60Hz	50'	12/3 AWG	SJTW	Yellow	Triple	No	
30040008-6	120V	15A	60Hz	2.5'	12/3 AWG	SEOW	Yellow	Triple	No	
25080011-6	120V	20A	60Hz	2'	12/3 AWG	SJTW	Yellow	Single	No	NEMA 5-20
25080301-6	120V	20A to 15A	60Hz	2'	12/3 AWG	STW	Yellow	Single	No	NEMA 5-15R, NEMA L5-20P
26000011-6	240V	20A	60Hz	2'	12/3 AWG	SJTW	Yellow	Single	No	NEMA 6-20
26000016-3	240V	20A	60Hz	6'	12/3 AWG	SJTOW	Yellow	Single	No	

GFCI | IN-LINE

30A | 40A IN-LINE CORD SETS

44830004-3

Shockshield™ In-Line GFCI ensures protection from dangerous current leakage that can cause electrical shock and possible electrocution.

• GFCI with 4-6mA trip point
• 25mS trip response time
• Manual reset
• Provides compliance with NEC 2008 Article 590.6 for Temporary Installations
• Custom cable gauges, lengths and terminations available by special order
• Applications: Plant maintenance, equipment service, and construction sites

c (UL) us LISTED

MODEL #	ELECTRICAL RATING			CORD LENGTH	CORD GAUGE	WIRE TYPE	CORD COLOR	RECEPTACLE COUNT	LIGHTED RECEPTACLE	PLUG & RECEPTACLE TYPE
44830004-3	120V	30A	60Hz	2'	10/3 AWG	SJOOW	Yellow	Single	No	NEMA L5-30
44830005-2	120V	30A	60Hz	6'	10/3 AWG	SJOOW	Yellow	Single	No	
44800012-3	240V	30A	60Hz	3'	10/3 AWG	SJOOW	Yellow	Single	No	NEMA L6-30
44800013-2	240V	30A	60Hz	6'	10/3 AWG	SJOOW	Yellow	Single	No	
44800020-1	240V	30A	60Hz	25'	10/3 AWG	SJOOW	Yellow	Single	No	

15A BOXES WITH CORD SETS

14880003-3

Shockshield™ GFCI boxes are built to withstand outdoor/rugged-type construction.

• GFCI with 4-6mA trip point
• 25mS trip response time
• Manual reset
• Provides compliance with NEC 2008 Article 590.6 for Temporary Installations
• Spring loaded covers protect receptacles
• Applications: Plant maintenance, equipment service, and construction sites

c (UL) us LISTED

MODEL #	ELECTRICAL RATING			CORD LENGTH	CORD GAUGE	WIRE TYPE	CORD COLOR	RECEPTACLE COUNT	GFCI TYPE	PLUG & RECEPTACLE TYPE
14880003-3	120V	15A	60Hz	6'	12/3 AWG	SJTW/SJTOW	Yellow	Quad	Right-Angle	NEMA 5-15

GANTRIES AND HOISTS

Sumner offers a full line of Gantries that can fit a variety of applications. With industry-leading compact design, this line of products make a difference on real-world jobsites. Our line of Hoists offer an innovative, heavy-duty, manual design to tackle your toughest lifts. Our Hoist line includes a variety of options such as standard Lever and Chain hoists, Premium Lever and Chain hoists, Premium Lever and Chain hoists with overload protection.

• GH3/4T Gantry Series

• GH2T Gantry Series

• GH5T Gantry Series

• Premium Chain Blocks Hoists

• Premium Chain Blocks Hoists with

   Overload Protection

• Lever Hoist
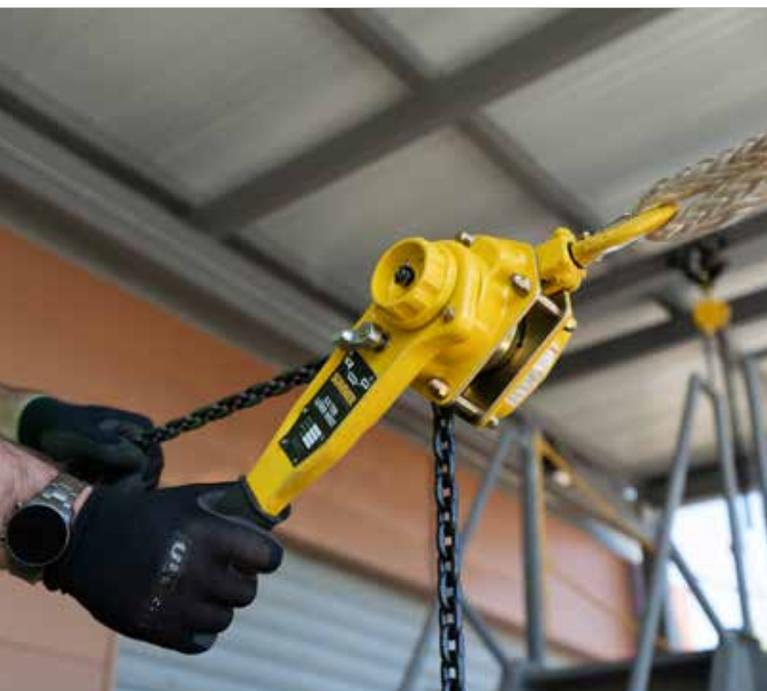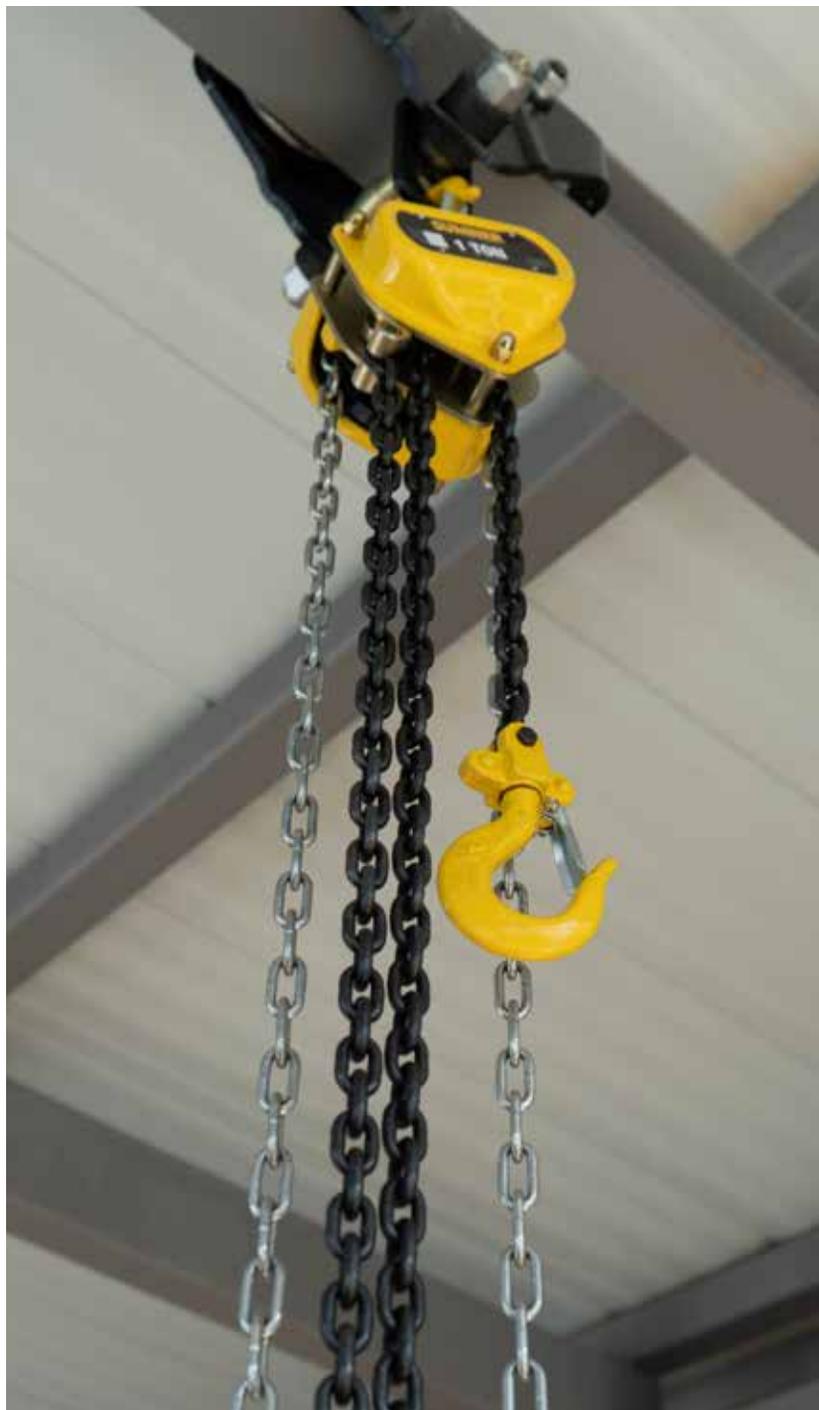
GH3/4T

The Sumner 3/4 Ton Gantry offers an industry leading compact 3-piece design to fit a variety of applications.

SPECIFICATIONS:
- Designed for loads up to 3/4 metric tons (1,650 lbs.)
- Lightweight & portable; aluminum frames & beam
- Quick two-person assembly & pinch point free
- Adjustable span
- Minimum pieces - (2) A-Frames with casters, trolley, cross beam and attaching hardware *Chain hoist not included
- Available with 8" locking casters or 10" flat free double locking casters
- Unassisted height adjustment
- Available in 8 models

ITEM #	DESCRIPTION	MODEL #	UPC	LOAD CAPACITY
785305	GANTRY GH-3/4T 10FT/3M W/8" CSTR	GH3/4T-8x15	661165853018	3/4 TON
785304	GANTRY GH-3/4T 10FT/3M W/FF TIRES	GH3/4T-8X12	661165853032	3/4 TON
785303	GANTRY GH-3/4T 13FT/4M W/8" CSTR	GH3/4T-8x10	661165853056	3/4 TON
785302	GANTRY GH-3/4T 13FT/4M W/FF TIRES	GH3/4T-8x8	661165853070	3/4 TON
785301	GANTRY GH-3/4T 16FT/5M W/8" CSTR	GH3/4T-10X15	661165853001	3/4 TON
785300	GANTRY GH-3/4T 16FT/5M W/FF TIRES	GH3/4T-10X12	661165853025	3/4 TON
785307	GANTRY GH-3/4T 8FT W/8" CSTR	GH3/4T-10X10	661165853049	3/4 TON
785306	GANTRY GH-3/4T 8FT W/FF TIRES	GH3/4T-10X8	661165853063	3/4 TON
OPTIONAL GH3/4T GANTRY ACCESSORIES				
786960	GANTRY CART 3/4T, 2T	GSS-01	661165869606	---
785320	GH3/4T 15' Beam	3/4TBEAM15	661165853209	---
785321	GH3/4T 12' Beam	3/4TBEAM12	661165853216	---
785322	GH3/4T 10' Beam	3/4TBEAM10	661165853223	---
785323	GH3/4T 8' Beam	3/4TBEAM8	661165853230	---
785600	GH3/4T Trolley Assembly	GH3/4TROL	661165856002	---
779040	GH3/4T - Caster Kit, 8" Casters w/ Brake	GH3/4TCK8	661165790405	---
779041	GH3/4T- Caster Assembly, Swivel W/ Brake 8 x 2	GH3/4TCKS8	661165790412	---

GANTRIES

GH2T

The Sumner 2 Ton Gantry offers an industry leading compact 3-piece design to fit a variety of applications.

SPECIFICATIONS:
- Designed for loads up to 2 metric tons (4,400 lbs.)
- Lightweight & portable; aluminum frames & beam
- Quick two-person assembly, pinch point free & adjustable span
- Minimum pieces - (2) A-Frames with casters, trolley, cross beam and attaching hardware *Chain hoist not included
- 8" locking casters & available in 4 models

ITEM #	DESCRIPTION	MODEL #	UPC	LOAD CAPACITY
785102	GANTRY GH-2T 10FT/3M	GH2T-10x10	661165851021	2.0 TON
785101	GANTRY GH-2T 13FT/4M	GH2T-12x12	661165851014	2.0 TON
785100	GANTRY GH-2T 16FT/5M	GH2T-15x15	661165851007	2.0 TON
785103	GANTRY GH-2T 8FT	GH2T-8x8	661165851038	2.0 TON
OPTIONAL GH2T GANTRY ACCESSORIES				
786960	GANTRY CART 3/4T, 2T	GSS-01	661165869606	---
785074	GH2T 12' Beam	2TBEAM12	661165850741	---
785075	GH2T 10' Beam	2TBEAM10	661165850758	---
785076	GH2T 8' Beam	2TBEAM8	661165850765	---
785160	GH2T Trolley Assembly	GH2TROL	661165851601	---

GANTRIES | GANTRY SERIES

GH5T

The Sumner 5 Ton Gantry offers an industry leading compact 3-piece design to fit a variety of applications.

SPECIFICATIONS:
• Designed for loads up to 5 metric tons (11,000 lbs.)
• Lightweight & portable; Aluminum frames & beam
• Quick two-person assembly & pinch point free & adjustable span
• Minimum pieces - (2) A-Frames with casters, trolley, cross beam and attaching hardware *Chain hoist not included
• 8" locking casters & available in 3 models

MODEL #	DESCRIPTION	MODEL #	UPC	LOAD CAPACITY
785805	GH5T-15 with 15 ft. Beam	GH2T-15x15	661165858051	5 TON
785806	GH5T-12 with 12 ft. Beam	GH2T-12X12	661165858068	5 TON
785807	GH5T-10 with 10 ft. Beam	GH2T-10x10	661165858075	5 TON
OPTIONAL GH5T GANTRY ACCESSORIES				
785815	GH5T 15 ft. Beam Only	5TBEAM15	661165858150	
785816	GH5T 12 ft. Beam Only	5TBEAM12	661165858167	
785817	GH5T 10 ft. Beam Only	5TBEAM10	661165858174	
785895	GH5T Trolley Assembly	GH5TROL	661165858952	

GANTRIES | GANTRY SERIES

HOISTS

PREMIUM CHAIN BLOCK HOISTS

Sumner Lift Premium Chain Block Hoists low headroom design is ideal for your 1/4-20 ton lifting needs. Meets all ANSI/ASME, OSHA and CE Hoisting Standards.

SPECIAL FEATURES:
- Fused Brake Design
- 360 Degree Alloy Steel hooks
- Top Hook is easily removable
- Heat Treated Load Plates and internal Components
- Hard steel load sheave rollers
- 1.5x safety tested
- Unique zinc phosphate chain design

ITEM #	STOCK #	DESCRIPTION	LIFTING WEIGHT CAPACITY
787440	PCB025C10	1/4 Ton Chain Hoist with 10 ft. Chain Fall	1/4 TON
787441	PCB025C15	1/4 Ton Chain Hoist with 15 ft. Chain Fall	1/4 TON
787443	PCB025C30	1/4 Ton Chain Hoist with 30 ft. Chain Fall	1/4 TON
787447	PCB050C30	1/2 Ton Chain Hoist with 30 ft. Chain Fall	1/2 TON
787408	PCB100C10	1 Ton Chain Hoist with 10 ft. Chain Fall	1 TON
787409	PCB100C15	1 Ton Chain Hoist with 15 ft. Chain Fall	1 TON
787410	PCB100C20	1 Ton Chain Hoist with 20 ft. Chain Fall	1 TON
787411	PCB100C30	1 Ton Chain Hoist with 30 ft. Chain Fall	1 TON
787412	PCB150C10	1-1/2 Ton Chain Hoist with 10 ft. Chain Fall	1-1/2 TON
787413	PCB150C15	1-1/2 Ton Chain Hoist with 15 ft. Chain Fall	1-1/2 TON
787414	PCB150C20	1-1/2 Ton Chain Hoist with 20 ft. Chain Fall	1-1/2 TON
787415	PCB150C30	1-1/2 Ton Chain Hoist with 30 ft. Chain Fall	1-1/2 TON
787416	PCB200C10	2 Ton Chain Hoist with 10 ft. Chain Fall	2 TON
787417	PCB200C15	2 Ton Chain Hoist with 15 ft. Chain Fall	2 TON
787418	PCB200C20	2 Ton Chain Hoist with 20 ft. Chain Fall	2 TON
787419	PCB200C30	2 Ton Chain Hoist with 30 ft. Chain Fall	2 TON
787420	PCB300C10	3 Ton Chain Hoist with 10 ft. Chain Fall	3 TON
787421	PCB300C15	3 Ton Chain Hoist with 15 ft. Chain Fall	3 TON
787422	PCB300C20	3 Ton Chain Hoist with 20 ft. Chain Fall	3 TON
787423	PCB300C30	3 Ton Chain Hoist with 30 ft. Chain Fall	3 TON

PREMIUM CHAIN BLOCK HOISTS WITH OVERLOAD PROTECTION

Sumner Lift Premium Chain Block Hoists low headroom design is ideal for your 1-20 ton lifting needs. Meets all ANSI/ASME, OSHA and CE Hoisting Standards.

SPECIAL FEATURES:
• Top hook is easily removable
• Hard steel load sheave rollers
• 1.5x safety tested
• Unique zinc phosphate chain design

ITEM #	STOCK #	DESCRIPTION	LIFTING WEIGHT CAPACITY
787448	PCB100C10WO	1 Ton Chain Hoist with 10 ft. Chain Fall w/ Overload Protection	1 TON
787449	PCB100C15WO	1 Ton Chain Hoist with 15 ft. Chain Fall w/ Overload Protection	1 TON
787450	PCB100C20WO	1 Ton Chain Hoist with 20 ft. Chain Fall w/ Overload Protection	1 TON
787451	PCB100C30WO	1 Ton Chain Hoist with 30 ft. Chain Fall w/ Overload Protection	1 TON
787453	PCB150C15WO	1-1/2 Ton Chain Hoist with 15 ft. Chain Fall w/ Overload Protection	1-1/2 TON
787454	PCB150C20WO	1-1/2 Ton Chain Hoist with 20 ft. Chain Fall w/ Overload Protection	1-1/2 TON
787455	PCB150C30WO	1-1/2 Ton Chain Hoist with 30 ft. Chain Fall w/ Overload Protection	1-1/2 TON
787456	PCB200C10WO	2 Ton Chain Hoist with 10 ft. Chain Fall w/ Overload Protection	2 TON
787457	PCB200C15WO	2 Ton Chain Hoist with 15 ft. Chain Fall w/ Overload Protection	2 TON
787458	PCB200C20WO	2 Ton Chain Hoist with 20 ft. Chain Fall w/ Overload Protection	2 TON
787459	PCB200C30WO	2 Ton Chain Hoist With 30 ft. Chain Fall w/ Overload Protection	2 TON
787460	PCB300C10WO	3 Ton Chain Hoist With 10 ft. Chain Fall w/ Overload Protection	3 TON
787462	PCB300C20WO	3 Ton Chain Hoist With 20 ft. Chain Fall w/ Overload Protection	3 TON
787464	PCB500C10WO	5 Ton Chain Hoist With 10 ft. Chain Fall w/ Overload Protection	5 TON
787470	PCB1KC20WO	10 Ton Chain Hoist With 20 ft. Chain Fall w/ Overload Protection	10 TON

LEVER HOIST

Sumner Lift Lever Hoists arm you with the strength you need to lift, move and hold heavy materials on a jobsite or in a work shop! Sumner lever hoists all come with a steel construction and 360° ratchet with short strokes. Available in 1/4 to 6 ton lifting weight capacities.

SPECIAL FEATURES:
• Meet all ANSI/ASME, OSHA and CE hoisting standards
• Top hook is easily removable
• Hard steel load sheave rollers
• 1.5x safety tested

ITEM #	STOCK #	DESCRIPTION	LIFTING WEIGHT CAPACITY
787536	LH025C05	1/4 Ton Lever Hoist with 5 ft. Chain Fall	1/4 TON
787537	LH025C10	1/4 Ton Lever Hoist with 10 ft. Chain Fall	1/4 TON
787538	LH025C15	1/4 Ton Lever Hoist with 15 ft. Chain Fall	1/4 TON
787539	LH050C05	1/2 Ton Lever Hoist with 5 ft. Chain Fall	1/2 TON
787540	LH050C10	1/2 Ton Lever Hoist with 10 ft. Chain Fall	1/2 TON
787541	LH050C15	1/2 Ton Lever Hoist with 15 ft. Chain Fall	1/2 TON
787542	LH075C05	3/4 Ton Lever Hoist with 5 ft. Chain Fall	3/4 TON
787543	LH075C10	3/4 Ton Lever Hoist with 10 ft. Chain Fall	3/4 TON
787544	LH075C15	3/4 Ton Lever Hoist with 15 ft. Chain Fall	3/4 TON
787545	LH075C20	3/4 Ton Lever Hoist with 20 ft. Chain Fall	3/4 TON
787546	LH150C05	1-1/2 Ton Lever Hoist with 5 ft. Chain Fall	1-1/2 TON
787547	LH150C10	1-1/2 Ton Lever Hoist with 10 ft. Chain Fall	1-1/2 TON
787548	LH150C15	1-1/2 Ton Lever Hoist with 15 ft. Chain Fall	1-1/2 TON
787549	LH150C20	1-1/2 Ton Lever Hoist with 20 ft. Chain Fall	1-1/2 TON
787550	LH300C05	3 Ton Lever Hoist with 5 ft. Chain Fall	3 TON
787551	LH300C10	3 Ton Lever Hoist with 10 ft. Chain Fall	3 TON
787552	LH300C15	3 Ton Lever Hoist with 15 ft. Chain Fall	3 TON
787553	LH300C20	3 Ton Lever Hoist with 20 ft. Chain Fall	3 TON
787554	LH600C05	6 Ton Lever Hoist with 5 ft. Chain Fall	6 TON
787557	LH600C20	6 Ton Lever Hoist with 20 ft. Chain Fall	6 TON

CHAIN BLOCK HOISTS

Sumner Lift Chain Block Hoists are designed to thrive in light industrial applications work with capacities ranging from 1/2-10 tons. Sumner Lift Chain Block Hoist build on our legacy of reliable vertical lifting.

SPECIAL FEATURES:
- Meet all ANSI/ASME, OSHA and CE hoisting standards
- Top hook is easily removable
- Hard steel load sheave rollers
- 1.5x safety tested

ITEM #	STOCK #	DESCRIPTION	LIFTING WEIGHT CAPACITY
787558	CB050C10	1/2 Ton Chain Hoist with 10 ft. Chain Fall	1/2 TON
787559	CB050C15	1/2 Ton Chain Hoist with 15 ft. Chain Fall	1/2 TON
787560	CB050C20	1/2 Ton Chain Hoist with 20 ft. Chain Fall	1/2 TON
787561	CB050C30	1/2 Ton Chain Hoist with 30 ft. Chain Fall	1/2 TON
787562	CB100C10	1 Ton Chain Hoist with 10 ft. Chain Fall	1 TON
787563	CB100C15	1 Ton Chain Hoist with 15 ft. Chain Fall	1 TON
787564	CB100C20	1 Ton Chain Hoist with 20 ft. Chain Fall	1 TON
787565	CB100C30	1 Ton Chain Hoist with 30 ft. Chain Fall	1 TON
787566	CB150C10	1-1/2 Ton Chain Hoist with 10 ft. Chain Fall	1-1/2 TON
787567	CB150C15	1-1/2 Ton Chain Hoist with 15 ft. Chain Fall	1-1/2 TON
787568	CB150C20	1-1/2 Ton Chain Hoist with 20 ft. Chain Fall	1-1/2 TON
787569	CB150C30	1-1/2 Ton Chain Hoist with 30 ft. Chain Fall	1-1/2 TON
787570	CB200C10	2 Ton Chain Hoist with 10 ft. Chain Fall	2 TON
787571	CB200C15	2 Ton Chain Hoist with 15 ft. Chain Fall	2 TON
787572	CB200C20	2 Ton Chain Hoist with 20 ft. Chain Fall	2 TON
787573	CB200C30	2 Ton Chain Hoist with 30 ft. Chain Fall	2 TON
787574	CB300C10	3 Ton Chain Hoist with 10 ft. Chain Fall	3 TON
787575	CB300C15	3 Ton Chain Hoist with 15 ft. Chain Fall	3 TON
787576	CB300C20	3 Ton Chain Hoist with 20 ft. Chain Fall	3 TON
787577	CB300C30	3 Ton Chain Hoist with 30 ft. Chain Fall	3 TON
787578	CB500C10	5 Ton Chain Hoist with 10 ft. Chain Fall	5 TON
787579	CB500C15	5 Ton Chain Hoist with 15 ft. Chain Fall	5 TON
787580	CB500C20	5 Ton Chain Hoist with 20 ft. Chain Fall	5 TON
787581	CB500C30	5 ton Chain Hoist with 30 ft. Chain Fall	5 TON
787583	CB1KC15	10 ton Chain Hoist with 15 ft. Chain Fall	10 TON
787584	CB1KC20	10 ton Chain Hoist with 20 ft. Chain Fall	10 TON
787585	CB1KC30	10 ton Chain Hoist with 30 ft. Chain Fall	10 TON

HAND TOOLS

Your hands are your most important tools, the ones you need for every job. Equip them with high-quality, durable hand tools from Southwire. With a strong yet comfortable design and no-hassle lifetime warranty*, you can rely on these tools to make your life easier and last through years of hard work.

- Pliers

- Drivers

- Gloves

- Meter and Testers

- Compact Pocket Knife

LONG NOSE PLIER

LNP7D

Southwire long nose pliers provide a better grip without sacrificing tool strength or durability.

SPECIFICATIONS:
• Knurled jaws for sure-gripping
• Drop forged CRV steel for durability
• High leverage, hot rivet design for smooth action and no handle wobble
• Long nose design for forming and looping wire and handling small parts
• Precision induction-hardened cutting knives for long-lasting cutting edge

MODEL #	STOCK #	DESCRIPTION		
LNP7D	58749040	7" Long Nose Pliers w/ Side Cutter		
	HEIGHT	WIDTH	DEPTH	WEIGHT
LNP7D	7.13"	2.25"	0.75"	0.36 lbs

HAND TOOLS | PLIERS

DRIVERS

12-IN-1 MULTI-BIT SCREWDRIVER

SD12N1

The 12-in-1 Multi-Bit Screwdriver has precision-machined, quick change bits.

SPECIFICATIONS:
- Precision-machined, quick change bits for driving hex, Phillips, slotted, and square head screws
- Handles 3/16", 1/4", 5/16" slotted; #1, #2, #3 Phillips; #1, #2 square recessed; and 1/4", 5/16", 3/8", 1/2" hex drive
- Cushion grip handle provides extra comfort and maximum torque
- Premium chrome-plated shaft is durable as well as rust and corrosion resistant
- Meets ANSI/ASME specifications

MODEL #	STOCK #	DESCRIPTION	
SD12N1	59723940	12-in-1 Multi-Bit Screwdriver	
	HEIGHT	**WIDTH**	**DEPTH**	**WEIGHT**
SD12N1	11.75"	3.25"	1.38"	0.85 lbs

HAND TOOLS | DRIVERS

ELECTRICIAN'S WORK GLOVES

GLOVE1L

High dexterity electrician's gloves with anti-slip fingertips.

SPECIFICATIONS:
- Anti-slip finger tips for secure holding of wire and tools
- Padded palm for protection and secure grip
- Wrapped index finger for durability
- Breathable spandex back for comfortable fit and feel
- Touchscreen compatible index finger and thumb

MODEL #	STOCK #	DESCRIPTION	
GLOVE1L	587390	Electrician's Work Gloves - Large	
	PRIMARY MATERIAL	**SECONDARY MATERIAL**	
GLOVE1L	Breathable Spandex	Synthetic Leather	

HAND TOOLS | WORK GLOVES

METER AND TESTERS

MANUAL RANGING MULTIMETER

10031S

This general purpose multimeter is perfect for basic electrical repairs & troubleshooting. Features include a rugged double-molded housing, large LCD display, and battery test function. Meets the latest UL safety standards.

SPECIFICATIONS:
- AC/DC Voltage
- Resistance
- Continuity
- DC Current
- 1.5 & 9V Battery Test

MODEL #	STOCK #	DESCRIPTION	
10031S	65031140	Manual-Ranging Digital Multimeter	
	HEIGHT	**WIDTH**	**DEPTH**	**WEIGHT**
10031S	6.1"	2.9"	2.1"	0.6 lbs

VOLTAGE DETECTOR & TESTER

41161N

Southwire's new voltage testers perform three important tasks: detect voltage, test voltage, and test continuity. These testers are CAT IV 600V Safety Rated and rugged construction that withstands a 6.5 foot drop.

SPECIFICATIONS:
- Easy-to-read LED display
- Measures AC voltage from 12 volts to 600 volts
- Measures DC voltage from 9 volts to 400 volts
- Built-in non-contact voltage (NCV) detector that detects 100 volts to 1000 volts
- NCV has automatic self-test feature to ensure sufficient battery power is present before use. Otherwise the unit will power off.
- Tests continuity with visual and audible indication
- Bright LED worklight

MODEL #	STOCK #	DESCRIPTION	
41161N	65112040	Voltage Detector & Tester	
	HEIGHT	**WIDTH**	**DEPTH**	**WEIGHT**
41161N	6.12"	2.17"	1.61"	0.77 lbs

COMPACT POCKET KNIFE

CDPK

Our compact pocket knife features a durable 8CR13MOV stainless steel blade with black oxide finish and liner lock that keeps the blade secure. Perfect for everyday use.

SPECIFICATIONS:
- Corrosion resistant
- Liner lock keeps blade secure
- Dual thumb studs for right or left hand opening
- Comfort grip

MODEL #	STOCK #	DESCRIPTION		
CDPK	65029340	Compact Pocket Knife		
	HEIGHT	WIDTH	DEPTH	WEIGHT
CDPK	6.74"	1.05"	0.45"	0.10 lbs

WIRE AND CABLE

Southwire is a leader in the development of innovative wire and cable products supporting the Automotive market. We hold strong partnerships with global auto manufacturers, as well as Tier 2 suppliers, to deliver the highest-quality products certified to a wide range of automotive industry standards.

• Primary Wire

• Brake Light Cables

• Battery Cables

• Brake Light Cable Flat

• Booster Cable Twin Pair

• Speaker Wire

• Trailer Wire

• Trailer Cable
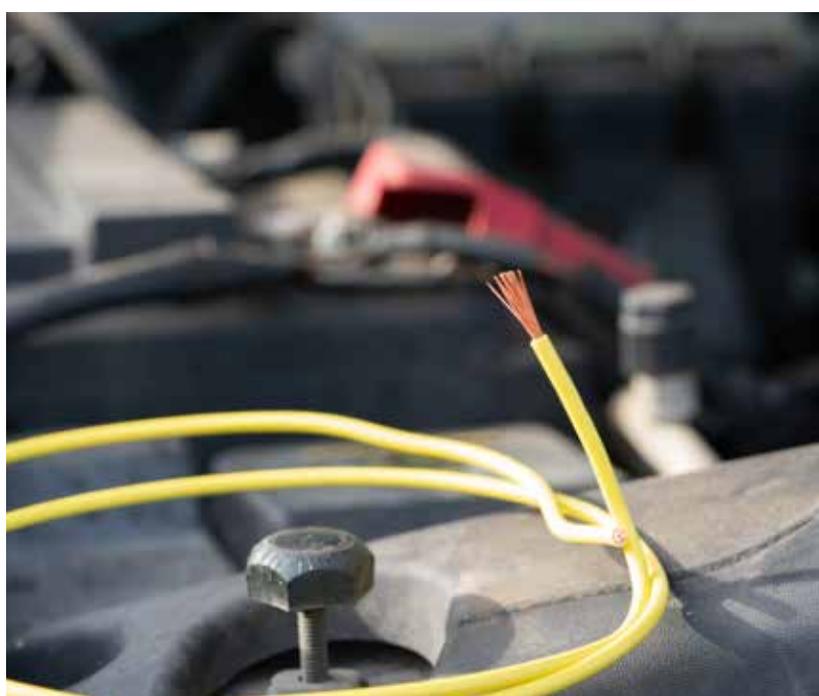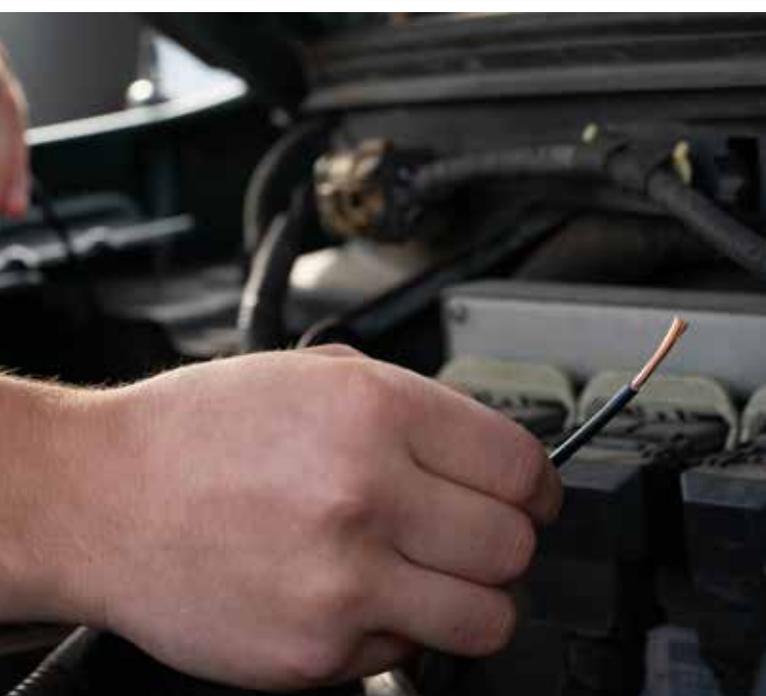
GPT PRIMARY WIRE

PRIMARY WIRE

SPECIFICATIONS:
- PVC outer jacket resists abrasion, water, oil and chemicals and can handle temperatures up to 185°F (85°C)
- Stranded all copper conductor for premium conductivity
- GPT automotive primary wire
- Ideal for use with automobiles, boats, trucks, RV's and trailers
- ROHS complaint
- Conforms to SAE J1128 standards

MODEL #	WIRE GAUGE	COLOR	LENGTH (feet)	MASTER PACK QUANTITY	MASTER WEIGHT (lbs)	MASTER PACK CUBE
55671833	10	Black	7	6	2.12	0.09
55879933	10	Blue	7	6	2.12	0.09
55672233	10	Yellow	7	6	2.12	0.09
56133033	10	Green	7	6	2.12	0.09
55672133	10	Red	7	6	2.12	0.09
55671933	10	White	7	6	2.12	0.09
55671333	12	Black	11	6	2.11	0.09
55671633	12	Blue	11	6	2.11	0.09
55671733	12	Yellow	11	6	2.11	0.09
55678933	12	Green	11	6	2.11	0.09
55671533	12	Red	11	6	2.11	0.09
55671433	12	White	11	6	2.11	0.09
55667133	14	Black	17	6	2.16	0.09
55669433	14	Blue	17	6	2.16	0.09
55670833	14	Yellow	17	6	2.16	0.09
56421933	14	Green	17	6	2.16	0.09
55669133	14	Red	17	6	2.16	0.09
55669033	14	White	17	6	2.16	0.09
55666633	16	Black	24	6	2.11	0.09
55668233	16	Blue	24	6	2.11	0.09
55668333	16	Yellow	24	6	2.11	0.09
56422033	16	Green	24	6	2.11	0.09
55668033	16	Red	24	6	2.11	0.09
55667933	16	White	24	6	2.11	0.09
55667333	18	Black	33	6	2.11	0.09
55667633	18	Blue	33	6	2.11	0.09
55843833	18	Yellow	33	6	2.11	0.09
55835033	18	Green	33	6	2.11	0.09
55667433	18	Red	33	6	2.11	0.09
55667233	18	White	33	6	2.11	0.09

WIRE AND CABLE | GPT PRIMARY WIRE

GPT PRIMARY WIRE

PRIMARY WIRE

105°C, Flexible Stranded Bare Copper, PVC Insulation, Moisture Resistant, Oil & Gasoline Resistant, Abrasion Resistant

SPECIFICATIONS:
- ASTM B3
- SAE J1128
- Ford ESF-M1L58-A (105°C wires)
- Chrysler MS-3450 (105°C wires)

SAE CONDUCTOR SIZE (AWG)	NUMBER OF STRANDS (AWG)	INSULATION THICKNESS		NOMINAL O.D.	
		(mm)	(inch)	(mm)	(inch)
20	7X28	0.584	0.023	2.130	0.084
18	16X30	0.584	0.023	2.330	0.092
16	19X29	0.584	0.023	2.610	0.103
14	19X27	0.584	0.023	2.970	0.117
12	19X25	0.660	0.026	3.600	0.142
10	19X23	0.787	0.031	4.490	0.177
8	19X.0285	0.940	0.037	5.630	0.222

All dimensions are nominal and subject to nominal manufacturing tolerances.

WIRE AND CABLE | GPT PRIMARY WIRE

GPT PRIMARY WIRE

COLOR CODING

WIRE GAUGE	PACKAGE (feet)	MODEL #			
		BLACK	WHITE	RED	GREEN
20	100	55672323		55745623	
18	35	55667322	55667222	55667422	55835022
18	100	55667323	55667223	55667423	55835023
18	500	55667325	55667225	55667425	55835025
18	1000	55667324	55667224	55667424	55835024
16	25	55666621	55667921	55668021	56422021
16	100	55666623	55667923	55668023	56422023
16	500	55666625	55667925	55668025	56422025
16	1000		55667924	55668024	
14	20	55667121	55669021	55669121	56421921
14	100	55667123	55669023	55669123	56421923
14	500	55667125	55669025	55669125	55669225
14	1000	55667124	55669024	55669124	56421924
12	12		55671421		
12	100	55671323	55671423	55671523	55678923
12	500	55671325		55671525	55678925
12	1000		55671424		
10	10	55671821		55672121	
10	100	55671823	55671923	55672123	56133023
10	500			55672125	
10	1000		55671924	55672124	
8	100				
8	1000	55666401	55804824	55665301	

WIRE GAUGE	PACKAGE (feet)	MODEL #		
		PINK	PURPLE	GRAY
18	100		56232423	
18	1000		56232424	56430924
14	100			56431323
14	500	56431401	56431525	
14	1000		56431524	56431324

COLOR CODING

WIRE GAUGE	PACKAGE (feet)	MODEL #			
		BLUE	**BROWN**	**YELLOW**	**ORANGE**
20	100				
18	35	55667622		55843822	
18	100	55667623	55667823	55843823	
18	500		55667825	55843825	56431101
18	1000	55667624	55667824	55843824	56431124
16	25	55668221		55668321	
16	100	55668223	55668623	55668323	
16	500	55668225	55668625	55668325	
16	1000				
14	20	55669421		55670821	
14	100	55669423	55669323	55670823	55669523
14	500	55669425	55669325	55670825	55669525
14	1000		55669324	55670824	55669524
12	12				
12	100	55671623	55879823	55671723	
12	500				
12	1000		55669324	55670824	
10	10				
10	100	55879923	56122323	55672223	
10	500		56122325		
10	1000				
8	100				
8	1000				

WIRE GAUGE	PACKAGE (feet)	MODEL #	
		RED/WHITE	**WHITE/BLACK**
14	1000	56717724	56717924

PRIMARY WIRE RACK

PRIMARY WIRE RACK

Primary Wire Center With Extensive Inventory All On One Rack. Equipped With 30 – 100 Foot Spools, Road Power's Primary Wire Center Offers A Full Selection In A Small Amount Of Space. It Is Perfect For A Countertop, Simple To Stock And Easy To Reload.

SPECIFICATIONS:
- Built-in Measuring Rule
- Small Footprint Is Perfect For Retail Applications
- Holds 30 Spools: 10-gauge Through 18-gauge Wire In 6 Different Color Options
- Refill Spools Can Be Ordered Individually

	GAUGE	COLOR	MODEL #	DESCRIPTION
Row 1 - Top:	18	Black	55667323	Black 18 Gauge GPT Primary Wire 100' Spool
	18	White	55667223	White 18 Gauge GPT Primary Wire 100' Spool
	18	Yellow	55843823	Yellow 18 Gauge GPT Primary Wire 100' Spool
	18	Green	55835023	Green 18 Gauge GPT Primary Wire 100' Spool
	18	Red	55667423	Red 18 Gauge GPT Primary Wire 100' Spool
	18	Blue	55667623	Blue 18 Gauge GPT Primary Wire 100' Spool
Row 2:	16	Black	55666623	Black 16 Gauge GPT Primary Wire 100' Spool
	16	White	55667923	White 16 Gauge GPT Primary Wire 100' Spool
	16	Yellow	55668323	Yellow 16 Gauge GPT Primary Wire 100' Spool
	16	Green	56422023	Green 16 Gauge GPT Primary Wire 100' Spool
	16	Red	55668023	Red 16 Gauge GPT Primary Wire 100' Spool
	16	Blue	55668223	Blue 16 Gauge GPT Primary Wire 100' Spool
Row 3:	14	Black	55667123	Black 14 Gauge GPT Primary Wire 100' Spool
	14	White	55669023	White 14 Gauge GPT Primary Wire 100' Spool
	14	Yellow	55670823	Yellow 14 Gauge GPT Primary Wire 100' Spool
	14	Green	56421923	Green 14 Gauge GPT Primary Wire 100' Spool
	14	Red	55669123	Red 14 Gauge GPT Primary Wire 100' Spool
	14	Blue	55669423	Blue 14 Gauge GPT Primary Wire 100' Spool
Row 4:	12	Black	55671323	Black 12 Gauge GPT Primary Wire 100' Spool
	12	White	55671423	White 12 Gauge GPT Primary Wire 100' Spool
	12	Yellow	55671723	Yellow 12 Gauge GPT Primary Wire 100' Spool
	12	Green	55678923	Green 12 Gauge GPT Primary Wire 100' Spool
	12	Red	55671523	Red 12 Gauge GPT Primary Wire 100' Spool
	12	Blue	55671623	Blue 12 Gauge GPT Primary Wire 100' Spool
Row 5 - Bottom:	10	Black	55671823	Black 10 Gauge GPT Primary Wire 100' Spool
	10	White	55671923	White 10 Gauge GPT Primary Wire 100' Spool
	10	Yellow	55672223	Yellow 10 Gauge GPT Primary Wire 100' Spool
	10	Green	56133023	Green 10 Gauge GPT Primary Wire 100' Spool
	10	Red	55672123	Red 10 Gauge GPT Primary Wire 100' Spool
	10	Blue	55879923	Blue 10 Gauge GPT Primary Wire 100' Spool

SXL PRIMARY WIRE

SXL PRIMARY WIRE

125°C, Flexible Stranded Bare Copper Conductor, XLPE Insulation, Moisture Resistant, Oil & Gasoline Resistant, Abrasion Resistant.

SPECIFICATIONS:
- ASTM B3
- SAE J1128
- Ford ESB-M1L85-A
- Chrysler MS-5919

STOCK CODE	SAE CONDUCTOR SIZE (AWG)	NUMBER OF STRANDS	INSULATION THICKNESS (INCHES)	NOMINAL O.D. (INCHES)
F20024	20	7	0.030	0.096
F18026	18	16	0.030	0.102
F18091*	18	19	0.030	0.102
F16020	16	19	0.032	0.118
F14024	14	19	0.035	0.137
F12017	12	19	0.037	0.16
F10005	10	19	0.041	0.191
F08033	8	19	0.043	0.234

All dimensions are nominal and subject to nominal manufacturing tolerances.
*This construction is not covered in Ford M1L85-A or Chrysler MS-5919

COLOR CODING

	COLOR	ORDER CODE
	BLACK	00
	WHITE	09
	RED	18
	GREEN	16
PKG CODE 12 QTY 5000 FT	BLUE	30
	BROWN	31
	YELLOW	34
	ORANGE	03
	PINK	10
	GRAY	32

WIRE AND CABLE | SXL PRIMARY WIRE

GXL PRIMARY WIRE

GXL PRIMARY WIRE

125°C, Flexible Stranded Bare Copper Conductor, XLPE Insulation, Moisture Resistant, Oil & Gasoline Resistant, Abrasion Resistant.

SPECIFICATIONS:
- ASTM B
- SAE J1128
- FORD ESB-M1L85-A
- CHRYSLER MS-8900

GXL J1128/ESB-M1L85-A/MS-8900+

STOCK CODE	SAE CONDUCTOR SIZE (AWG)	NUMBER OF STRANDS	INSULATION THICKNESS (INCHES)	NOMINAL O.D. (INCHES)
F20022	20	7	0.023	0.086
F18021*	18	16	0.023	0.092
F18022	18	16	0.023	0.092
F16014	16	19	0.023	0.103
F14021	14	19	0.023	0.117
F12012	12	19	0.026	0.142
F10004	10	19	0.031	0.179
F08011*	8	19	0.037	0.216

UL/SAE GXL J1128, UL 2276**

STOCK CODE	SAE CONDUCTOR SIZE (AWG)	NUMBER OF STRANDS	INSULATION THICKNESS (INCHES)	NOMINAL O.D. (INCHES)
F18089	18	16	0.023	0.092
F18157	18	19	0.023	0.092
F16053	16	19	0.023	0.103
F14049	14	19	0.023	0.117
F12034	12	19	0.026	0.142
F10019	10	19	0.031	0.179
F08005	8	19	0.037	0.216

All dimensions are nominal and subject to nominal manufacturing tolerances.
+These products do not have print. Only the UL/SAE products have print
*These constructions are not covered in Chrysler MS-8900.
**UL Recreational Vehicle Cable are rated 24 volts per UL 2276.

COLOR CODING

PKG CODE	QTY	COLOR	ORDER CODE
		BLACK	00
		ORANGE	03
		PURPLE	07
		WHITE	09
07	2500 FT	PINK	10
12	5000 FT	Dk GREEN	16
		RED	18
		Dk BLUE	30
		BROWN	31
		GRAY	32
		Lt Green	33
		YELLOW	34

BATTERY CABLES

BATTERY CABLES

105°C, Flexible Stranded Copper Conductor, PVC Insulation. Resistant to flame, ozone, hot water, abrasion, automotive fluids, temperature and humidity cycling

SPECIFICATIONS:
- ASTM B3 Soft or annealed copper
- SAE J1127 Low Voltage Battery Cable

TYPE SGT GENERAL PURPOSE

STOCK CODE	SAE CONDUCTOR SIZE (AWG)	NUMBER OF STRANDS	INSULATION THICKNESS (INCHES)	NOMINAL O.D. (INCHES)
F06035	6	133/27	0.060	0.301
F04022	4	133/25	0.065	0.360
F02019	2	133/21	0.065	0.420
F01014	1	259/25	0.065	0.458
F1T019	1/0	1026/30	0.065	0.515
F2T013	2/0	1254/30	0.065	0.570
F3T010	3/0	1615/30	0.078	0.646
F4T018	4/0	2109/30	0.078	0.706

TYPE SGX GENERAL PURPOSE

STOCK CODE	SAE CONDUCTOR SIZE (AWG)	NUMBER OF STRANDS	INSULATION THICKNESS (INCHES)	NOMINAL O.D. (INCHES)
F06023	6	133/27	0.060	0.315
F04014	4	133/25	0.065	0.374
F02013	2	133/23	0.065	0.428
F01011	1	259/25	0.065	0.460
F1T016	1/0	1026/30	0.065	0.523
F2T010	2/0	1254/30	0.065	0.578
F3T008	3/0	1615/30	0.078	0.654
F4T015	4/0	2052/30	0.078	0.714

TYPE SGR GENERAL PURPOSE

STOCK CODE	SAE CONDUCTOR SIZE (AWG)	NUMBER OF STRANDS	INSULATION THICKNESS (INCHES)	NOMINAL O.D. (INCHES)
F06149	6	133	0.060	0.301
F04068	4	133	0.065	0.365
F02119	2	665	0.065	0.043
TBD	1	833	0.065	0.461
TBD	1/0	1026	0.065	0.525
TBD	2/0	1254	0.065	0.587
TBD	3/0	1615	0.078	0.645
TBD	4/0	2109	0.078	0.709

All dimensions are nominal and subject to nominal manufacturing tolerances.

COLOR CODING

PKG CODE	QTY	COLOR	ORDER CODE
03	500 FT	BLACK	00
04	1000 FT	RED	18

BRAKE LIGHT CABLE FLAT

BRAKE LIGHT CABLE FLAT

80°C, Flexible Stranded Copper Conductor, PVC Insulation

SPECIFICATIONS:
- ASTM B3 Soft or annealed copper
- SAE J1128

STOCK CODE	SAE CONDUCTOR SIZE (AWG)	NUMBER OF STRANDS	INSULATION THICKNESS (INCHES)	NOMINAL O.D. (INCHES)
TBD	18/2	19	WeBk	0.301
FBK004	16/2	19	WeBk	0.360
TBD	16/3	19	WeBk	0.420
TBD	16/4	19	WeBk	0.458
FBK006	14/2	19	WeBk	0.515
TBD	14/3	19	WeBk	0.570
FBK019	12/2	19	WeBk	0.646

All dimensions are nominal and subject to nominal manufacturing tolerances.

COLOR CODING

PKG CODE	QTY	JACKET COLOR	STOCK CODE
01	100	BLACK	00
03	500	RED	02
04	1000	GRAY	08
07	2500		

BOOSTER CABLE

BOOSTER CABLE

Stranded Bare Copper Conductor with PVC, Rubber or TPE insulation.

STOCK CODE	SAE CONDUCTOR SIZE (AWG	NUMBER OF STRANDS	INSULATION THICKNESS (INCHES)	OVERALL CABLE DIMENSIONS (INCHES)	JACKET COLOR
TBD	8	19	0.88	0.905 X .4	TBD
TBD	6	7	0.95	0.915 X .4	TBD
TBD	4	7	0.94	1 X .45	TBD
59940301	2	259	0.065	0.427 X 0.960	Black

All dimensions are nominal and subject to nominal manufacturing tolerances.
Booster cables are normally made to customer specifications. Data shows are averages for the listed gauges

SPEAKER WIRE PARALLEL ZIP TYPE CABLE

Southwire stranded clear speaker, polarized for use in internal audio wiring.

SPECIFICATIONS:
• RoHS-2 (European Directive 2011/65/EU)

MODEL #	NUMBER OF CONDUCTORS	SIZE (AWG)	NO. OF STRANDS	INSULATION THICKNESS		NOMINAL O.D.	WEIGHT LBS/FT	WEIGHT KG/KM
				(mm)	(inch)	(inch)		
557977	2	18	16/30	0.559	0.022	0.093 x 0.184	15.13	22.51
557976	2	16	26/30	0.635	0.025	0.111 x 0.235	23.73	22.51
566508	2	14	41/30	0.635	0.025	0.125 x 0.255	34.17	50.84

WIRE AND CABLE | SPEAKER WIRE

GPT BONDED TRAILER CABLE

GPT BONDED TRAILER CABLE

80°C, Stranded Bare Cu Conductors, PVC Insulation, Flat Construction.

SPECIFICATIONS:
• SAE J1128

MODEL #	AWG SIZE	STRAND	NO OF CONDUCTORS	CONDUCTOR COLORS	QTY PER CARTON	WT PER CFT	WT PER CARTON
515440318	14	19	4	White, Brown, Yellow, Green	4	6.314	25.26
515640318	16	19	4	White, Brown, Yellow, Green	4	4.338	17.35

TRAILER CABLE

80C, Stranded bare copper conductors, PVC insulation & PVC jacket, Round construction.

SPECIFICATIONS:
• SAE J1128

PART NO	AWG SIZE	STRAND	NO OF CONDUCTORS	JACKET THICKNESS (INCHES)	NOMINAL OD (INCHES)
TBD	12	19	4	-	-
TBD	12	19	6	-	-
TBD	14	19	2	-	-
TBD	14	19	4	0.375	0.42
TBD	14	19	6	0.081	0.516
TBD	14	19	6	-	-
TBD	16	19	5	0.06	0.4
TBD	16	19	6	0.4	0.389

Most trailer cables are manufactured to customer specifications.
Data shown is example of available constructions.
Any configuration is available upon request.

COLOR CODING

PKG CODE	QTY	JACKET COLOR	STOCK CODE
04	1000	BLACK	00
05	1500		
07	2500		

Southwire® | **TRANSPORTATION**
CATALOG

get social with us:

f
/SOUTHWIRETOOLS

in
/SOUTHWIRE-COMPANY

⊙
@SOUTHWIRETOOLS

▶
@SOUTHWIRE

WWW.SOUTHWIRE.COM | 1-855-SWTOOLS

SCAN TO LEARN MORE