

25425 - GE kitchen & bath 8 watt T5 1-pack

F8T5/WW/CARD

- ☞ GE's Warm White Thin Line lights are ideal for display or shelf lighting and under cabinets.
- ☞ 0.6 inch diameter T5 with miniature bi-pin (g5) base
- ☞ 12 inches long
- ☞ 3000K warm white light appearance
- ☞ For use in kitchens, bathrooms, and living areas
- ☞ GE kitchen & bath fluorescent bulbs deliver a warmer tone to create a comfortable and inviting atmosphere. These warm white bulbs are best for living areas throughout your home, hotels, commercial restrooms, reception areas and food preparation
- ☞ Lasts 2.3 years based on 6 hours per day usage
- ☞ Warm, inviting light that complements any décor

PRODUCT PHOTO



GENERAL CHARACTERISTICS

Base Description	Miniature Bi-Pin
Base Type	Pin/Plug-In
Mercury Content	6 mg
Mercury-Picogram per mean lm hr	3636.4
Starting Temp (MIN) C-degrees	10 °C
Bulb Material	Soda lime
Rated Life Hours-nominal	5000 h
Primary Application	Kitchen & Bath
Product Technology	Linear Fluorescent
Base	G5
Bulb Shape	T5

PHOTOMETRIC CHARACTERISTICS

Mean Lumens nominal	330 lm
Nominal Initial Lumen per Watt	51
Initial Lumens-nominal	410 lm
Color Rendering Index-CRI	52
Color Temperature	3000 K

PRODUCT INFORMATION

Product Code	25425
Description	F8T5/WW/CARD
Alternative Unit Of Measure	CASE
Standard Package Quantity	
Ean UPC	043168254250
Standard Package GTIN	10043168254257
No Of Items Per Sales Unit	
No Of Items Per Standard Package	
Sales Unit	Case
UCC	043168254250
Alternative Unit Of Measure	CASE
Standard Package Quantity	5
Ean UPC	043168254250
Standard Package GTIN	00043168254250
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	5
Sales Unit	Case
UCC	043168254250

DIMENSIONS

Bulb Diameter (DIA) <Max>	0.63 in
Bulb Diameter (DIA) <Min>	0.53 in
Diameter	0.62 in
Face to End of Opposing Pin (B) <Max>	11.63 in
Face to End of Opposing Pin (B) <Min>	11.53 in
Nominal Length	12.0 in

ELECTRICAL CHARACTERISTICS

Current Crest Factor (MAX)	1.7
Open Circuit Voltage (rapid start) Min @ Temperature	140.00 V @ 10 °C
Cathode Resistance Ratio - Rh/Rc (MIN)	4.250
Cathode Resistance Ratio - Rh/Rc (MAX)	6.500
Rated power (Watts)	8 W

CAUTIONS & WARNINGS


Caution

- Lamp may shatter and cause injury if broken
- Wear safety glasses and gloves when handling lamp.
- Do not use excessive force when installing lamp.

Warning

- Risk of Electric Shock

Turn power off before inspection
installation or removal.

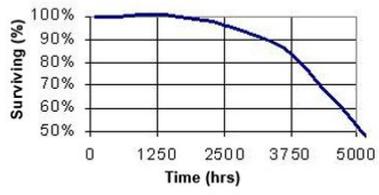

May 31, 2019 7:50:39 AM | For additional information, visit products.currentbyge.com