



Color :  White

UPC Code : 078477744505

Country Of Origin : China

NEMA :  5-15R

Available Colors :



AGTR1-W

15 Amp, Self Test, Tamper-Resistant Dual-Function AFCI/GFCI Outlet with LED Indicator Light

15 Amp, 125 Volt Dual Function AFCI/GFCI Receptacle, 20 Amp Feed-Through, Tamper-Resistant, Monochromatic, back and side wired, nylon wallplate/faceplate, screws and self-grounding clip included – White

The SmartlockPro® Dual Function AFCI/GFCI Receptacle offers protection both from electrical fires that could result from arc-faults and from electrical shock due to ground faults in one smart device. Through advanced technology, the SmartlockPro Dual Function AFCI/GFCI Receptacle helps protect home and family by working to detect arc-fault and ground fault hazards and, if detected, quickly cuts off power to help avoid a potential fire or shock occurrence. The SmartlockPro Dual Function AFCI/GFCI Receptacle offers a National Electrical Code® (NEC®) compliant option for AFCI/GFCI protection in residential kitchens and laundry areas for new construction, modifications/extensions and replacement receptacles. It is also ideal as a replacement for ungrounded receptacles, satisfying NEC requirements for both AFCI and GFCI protection.

Technical Information

Electrical Specifications

Amperage : 15 A

Dielectric Voltage : 1250 VAC

Grounding : Self-Grounding

Horsepower Rating : 1 hp

Pole(s) : 2

Power Supply Input and Frequency : 125V, 60Hz

Short Circuit Current Rating :
10 kA

Temperature Rise : Max 30°C

Trip Level : Class A

Voltage : 125 VAC

Wire(s) : 3

Environmental Specifications

Operating Temperature :
Maximum Continuous 66°C,
Minimum -35°C (w/o impact)

Material Specifications

Body : Thermoplastic

Face : Thermoplastic

Grounding Screw : #8
Galvanized Steel

Line Contacts : Brass

Mounting Strap : Galvanized
Steel

Mechanical Specifications

Product ID : Ratings are
marked on device

Termination : Back and Side
Wire

Torque Range : 14-18 lbs.

Self-Grounding Clip : Yes

TR Shutter : Thermoplastic

Terminal Clamps : Brass

Terminal Screws : #8 Plated
Steel

Wire Accomodation : #10 -
#14 AWG Copper, #10 - #12
Copper Clad

Product Features

Brand : SmartlockPro

Color : White

Device Type : Duplex
Receptacle/Outlet

Feature(s) : Indicator Light,
Self-Test, Tamper Resistant,
Wallplate Included

Grade : Residential
/Commercial Specification
Grade

NEMA Configuration : 5-15R

Product Type : AFCI / GFCI

Warranty

Warranty : 2-Year Limited

Standards and Certifications

**Applicable Standards and
Certifications** : UL|CSA|CSA
C22.2 No. 144|CSA C22.2 No.
270|CSA C22.2 No. 42|Fed
Spec WC-596|UL 943|UL
1699A|UL 498

NEMA : WD-1 and WD-6

Features and Benefits


- Trip threshold meets or exceeds UL requirements for tripping time on ground faults and on both series and parallel arcs for optimal safety
- Engineered to meet the latest UL standard for auto-monitoring (self-test); periodically conducts an automatic internal test to confirm that GFCI protected power is available
- On initial power up, tests the GFCI circuit within 3 seconds
- Patented Lockout Action prevents reset if the device is damaged
- Status Indicator Light provides simple, intuitive feedback on power and protection status as well as indication of line/load reversal for at-a-glance analysis
- TEST and RESET buttons are readily accessible on the face of the device
- Improved immunity to high frequency noise reduces nuisance tripping
- Superior resistance to electrical surges and over-voltages enhancing reliability
- Patented bridge contact design provides individual sets of contacts for receptacle face and downstream receptacles; no power will be delivered to receptacle face if improperly wired (line-load reversed)
- One-piece T-design trip latch mechanism provides efficient operation
- Impact-resistant thermoplastic cover and body for durability
- Expanded wiring options with nine back-wire holes (two for each line and load connection plus one for ground with an internal clamp) for easy installation
- Compatible with all Decora® devices and wallplates for multi-gang installation option; available in select popular colors

Patents*

US10317431	US10656199
US7355117	CA2958166
US10401413	MX361147
MX325634	CA2621644
US7868719	US7697252
US11831139	US8526144
CA2624409	MX344697
CA2730014	US8944859
MX302458	US8599522
US8599523	CA2677283
US9276393	US8242362
US10367347	US10690700
US11456138	US9053886
US9709626	US9759758
US11349293	MX308495
CA2946849	US11105864
US9577420	US7820909
US10483066	US8587914

This list is provided for patent marking purposes only. A good faith effort is made to maintain the accuracy and completeness of this list. No legal inference should be drawn from the omission of a patent from this list.

Dimensional Drawing

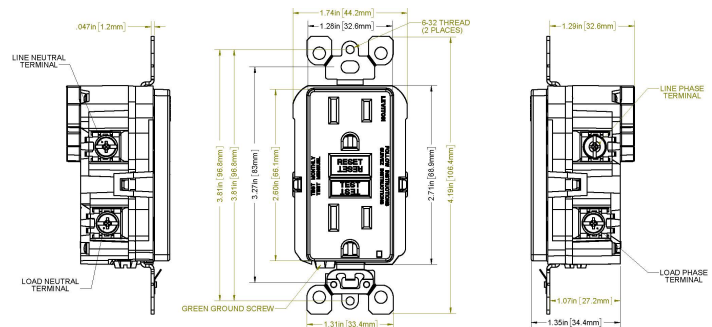

SPECIFICATION SUBMITTAL

JOB NAME: 	CATALOG NUMBERS: 	
JOB NUMBER: 		

Leviton Manufacturing Co., Inc

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.

T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-461-2002 ·

FAX: +1-800-824-3005 ·

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52) 5386- 1797 ·

Visit our Website at: www.leviton.com

© 2026 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

www.leviton.com/company/about-leviton/locations

© 2026 Leviton Manufacturing Co., Inc.