


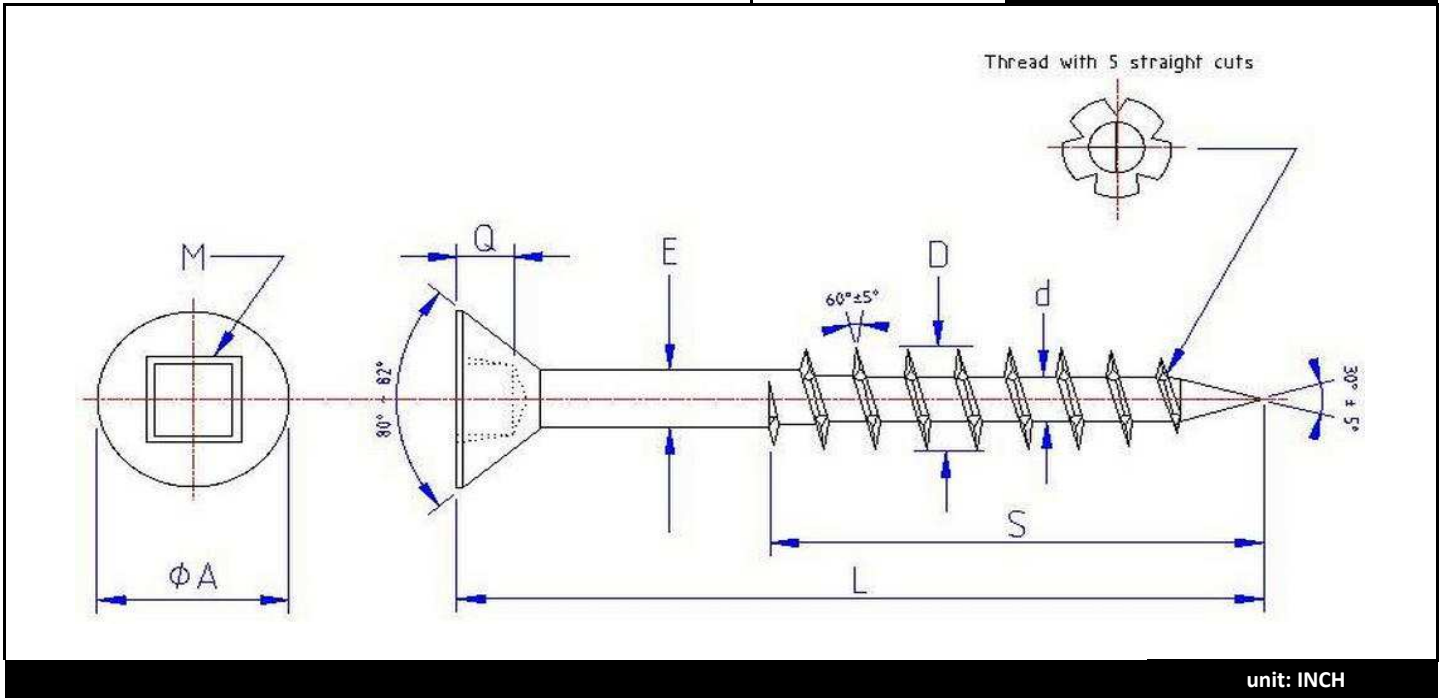

L LENGTH TOLERANCE	1-1/4"	+0	-0.05
	> 1-1/4" to ≤ 2-3/4"	+0	-0.06
	> 2-3/4"	+0	-0.09

S THREAD LENGTH	≤ 1-3/4"	Full Thread
	> 1-3/4"	1-3/4" ±0.05

SCREW SIZE	M PUNCH		Q DRIVE DEPTH	A HEAD DIAM.	E BODY DIAM.	D THREAD DIAM.	d THREAD DIAM.	THREAD PER INCH	TORK INCH/ POUND	DRILL SIZE
3/16	# 2	Min	0.060	0.340	0.148	0.207	0.139	8	56	5/32"
		Max	0.075	0.385	0.153	0.217	0.145			
1/4	# 3	Min	0.080	0.452	0.187	0.246	0.178	7	142	3/16"
		Max	0.095	0.507	0.192	0.257	0.185			

**Flat Countersunk Head, Square Recess, Coarse thread with 5 straight cuts, Diamond Point
GOLD RUSPERT (1000 HRS SST)**

Root = Flat socKet Concrete Screw Diamond Point

Bulk Label Description:

English : FLAT HEAD, SQUARE, CONCRETE SCREW, DIAMOND POINT, GOLD 'RUSPERT'

French : VIS À BÉTON, TÊTE PLATE, CARRÉ, POINTE DE DIAMANT, 'RUSPERT' OR

Spanish : TORNILLO PARA HORMIGÓN, CABEZA PLANA, CUADRADO, PUNTA DE DIAMANTE, 'RUSPERT ORO'



Date : 21 janvier 2019

Done by : **P.B.**