



TELESCOPING LADDER

TS1000 SERIES

300lb

LOAD CAPACITY

TYPE IA DUTY RATING

Combined Weight of User and Materials

PROFESSIONAL GRADE PERFORMANCE

- Compact design makes it easy to store and ideal for transport
- Visual lock provides clear indication of safety and security
- Adjustable ladder heights offer versatile functionality for various applications



WERNER QUALITY & ANSI COMPLIANT



Superior Locking System



Speed-Controlled Lowering



Wide Step Work Zone



TELESCOPING LADDER

TS1000 SERIES

300lb

LOAD CAPACITY

Type IA Duty Rating

Combined Weight of User and Materials


FEATURES

- Patented, reinforced rung to rail design for superior durability & stable ascension
- Visual lock indicators provide a safe climb with one-click unlock efficiency
- Speed-controlled lowering for a soft close
- Wide step work zone for added comfort, number of wider rungs in the climbable area varies by model. (TS1250 has 5 wide rungs & TS1500 has 12 wide rungs)
- Non-marring XL bumpers prevent damage on finished surfaces
- Slip-resistant feet for enhanced stability and traction
- Collapses for compact storage



Scan for Product Info

TS1250 12.5' MODEL

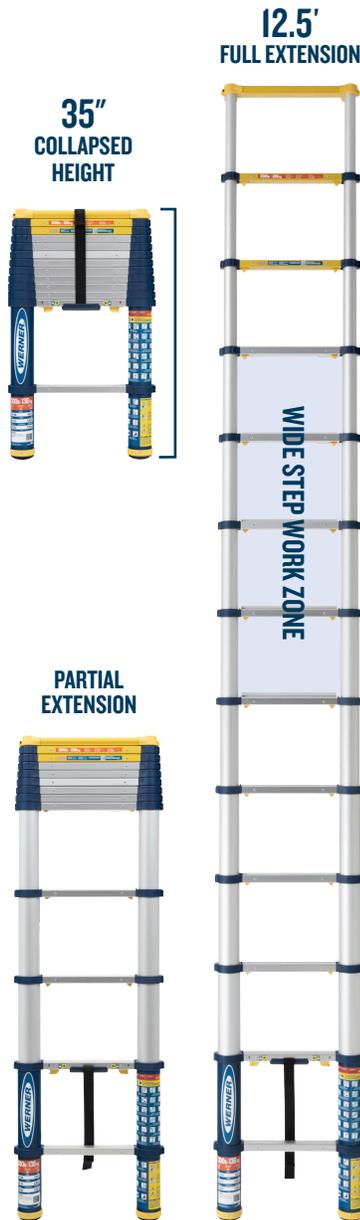

Non-marring XL bumpers

Lock indicators with one-click unlock


Wide step work zone
Number of Rungs Varies by Model.

Storage strap and carry handle

Easy to read safety labeling

Slip-resistant, non-marring feet

TS1500 15' MODEL

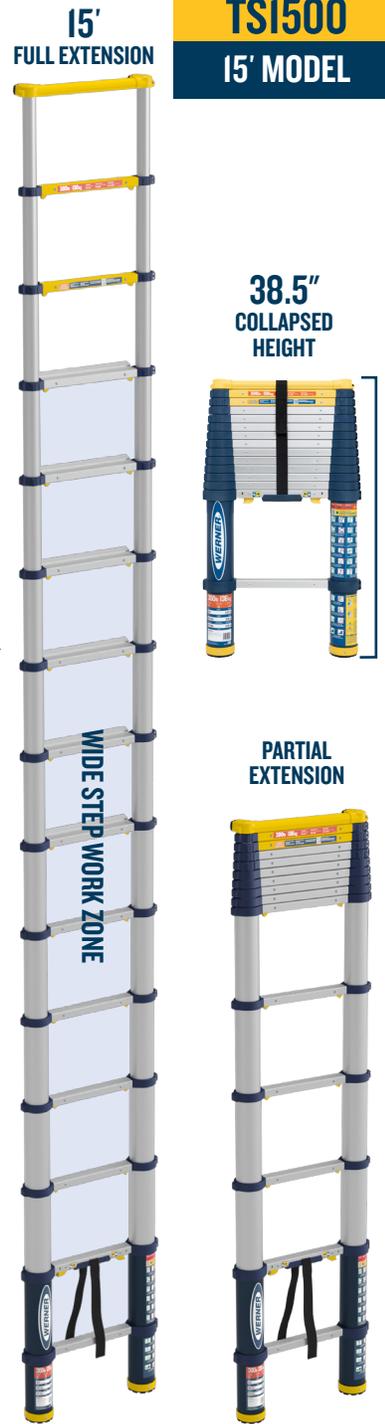

SPECIFICATIONS

MODEL NO.	FULL EXTENSION HEIGHT	APPROX. WIDTH	COLLAPSED HEIGHT	REACH HEIGHT*	NUMBER OF WIDE STEP WORK ZONE RUNGS	LOAD CAPACITY
TS1250	12.5'	20"	35"	16' 1"	5 of the Climbable Rungs	300 lbs
TS1500	15'	21"	38.5"	18' 1"	All Climbable Rungs	300 lbs

*Assumes a 5'7" person with vertical 12" reach