





OUR MISSION

SENCO is dedicated to delivering innovative fastening systems that make hard work easier. No matter where or how you work, we are committed to making your jobsite, workshop, or workplace safer and more productive.



U.S. MANUFACTURING

Since our founding in 1948, Senco has been committed to supporting local communities by creating jobs. From our in-house design and engineering teams to tool assembly, testing, fastener manufacturing, sales, and front-of-house operations, our employees are the driving force behind everything we do at SENCO.

Having a well-rounded team allows for more innovative processes, technologies, and products, keeping SENCO competitive in an ever-expanding market and meeting the evolving needs of consumers.

INNOVATION

When choosing SENCO, you are not only getting the highest quality products - you're supporting American manufacturing. Most SENCO fasteners are made at our 500,000 square-foot facility in Cincinnati, Ohio.

At SENCO, our mission is simple — make hard work easier. We innovate in several aspects of the tool and fastener manufacturing industry, ensuring we meet present needs of the market without compromising the potential of future generations to come.


SAFETY

We design our products with safety in mind and have developed resources for the industry to promote safety on their job sites. SENCO applies those same practices to our workplace, to ensure the well-being of every employee in our facilities.

COMMUNITY

SENCO supports Homes for Our Troops by hosting an annual charity golf outing, benefiting the organization's mission of providing specially adapted homes for severely injured post-9/11 veterans. Through this partnership, SENCO not only contributes monetarily, but also raises awareness and solidarity for the brave men and women who have sacrificed for their country.

RESPONSIBLE MANUFACTURING

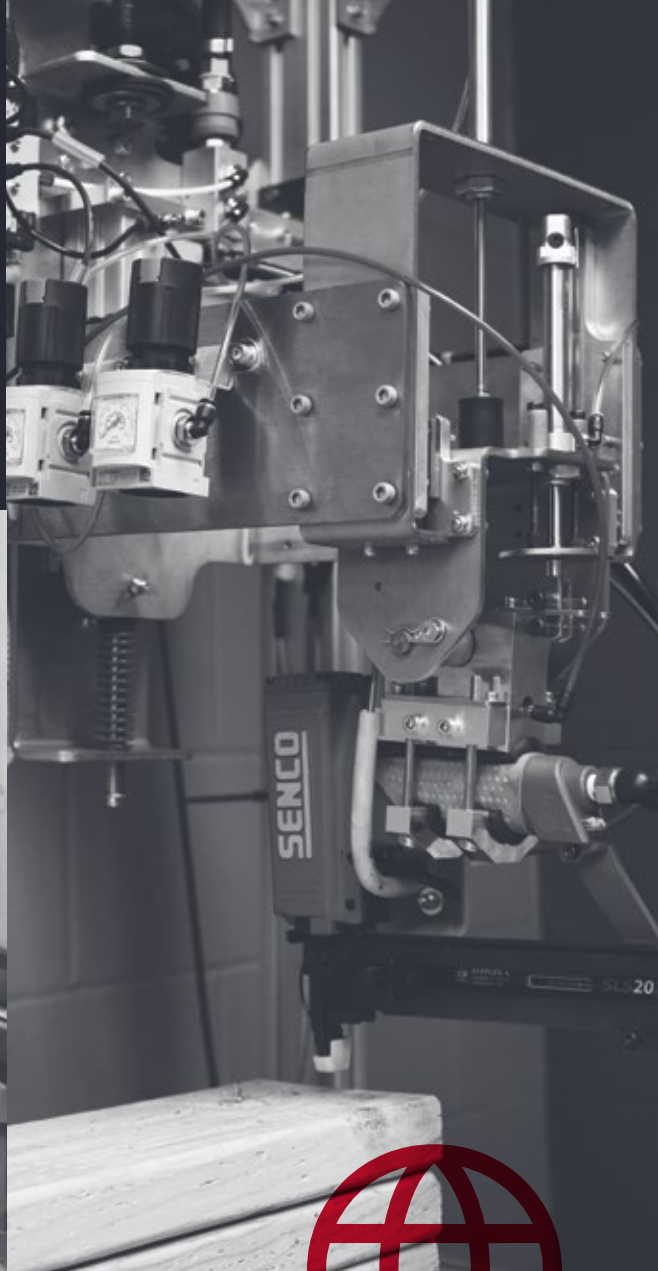

RECYCLED STEEL

Each month barges deliver over 2,000 tons of steel rod to Senco's manufacturing facility. All the steel we use to produce our fasteners is made from 100% recycled material that we source from steel mills here in the U.S.

The wire is sent through an in-house cleaning process to ensure superior tape adhesion. From there, it gets drawn down to produce over 700 varieties of fasteners in our manufacturing facility in Cincinnati, Ohio.

Over 95% of the leftover metal scrap from this process is sent off to the other U.S. manufacturers and recyclers, keeping more out of landfills and supporting a circular economy.

REDUCING EMISSIONS

SENCO is dedicated to continuously minimizing volatile organic compound (VOC) emissions, a key contributor to air pollution. This not only contributes to a healthier environment for employees, but also fosters a safer atmosphere for the surrounding communities.

SENCO is also committed to reducing transportation emissions. By leveraging barge transport, Senco significantly cuts down on emissions, further reinforcing our commitment to sustainability and environmental responsibility.

DURASPIN™

PRODUCTIVITY REDEFINED

DURASPIN® screw systems help you get the job done up to four times faster than bulk screwdrivers and loose screws, improving job site productivity by more than 30%.

APPLICATIONS

Our full line of integrated tools, attachments, kits, and accessories can tackle almost any job including drywall, sub-flooring, decking, metal framing, and a variety of commercial and industrial applications. For projects with tough requirements, our wide selection of ICC and Miami-Dade certified screws will keep your job on target. Check out our next generation of DURASPIN® auto-feed screw systems with enhanced features that redefine productivity and help you get the job done faster and easier.

KEY FEATURES

- Patented corner-fit feed system for better screw placement in tight spaces and corners
- Locking depth of drive adjustment
- Tool-free adjustable nosepiece
- Easily load 50 screws in less than a second
- Trigger lock for continuous operation
- Long-lasting drive bits with quick-slide release



DS532-AC

DS225-18V

2" 5000 RPM CORDLESS COLLATED SCREWDRIVER



TOOL OVERVIEW

- Drives #6 to #12 collated screws 1" to 2" in length
- Patented corner-fit feed system
- Detachable feed system to expose bit for quick reversing
- 5000 RPM high speed brushless motor
- Precise depth of drive adjustment with depth lock

APPLICATIONS

For drywall (into wood or light gauge steel studs), subfloor, sheathing, cement board, underlayment

DS222-18V

2" 2500 RPM CORDLESS COLLATED SCREWDRIVER



TOOL OVERVIEW

- Drives #6 to #12 collated screws 1" to 2" in length
- Patented corner-fit feed system
- Detachable feed system to expose bit for quick reversing
- Selectable 2500/1600 RPM high torque brushless motor
- Precise depth of drive adjustment with depth lock

APPLICATIONS

High torque applications including metal framing/decking, crating, gypsum/sheathing to heavy steel

DS322-18V

3" 2500 RPM CORDLESS COLLATED SCREWDRIVER



TOOL OVERVIEW

- Drives #6 to #12 collated screws 1" to 3" in length
- Patented corner-fit feed system
- Detachable feed system to expose bit for quick reversing
- Selectable 2500/1600 RPM high torque brushless motor
- Precise depth of drive adjustment with depth lock

APPLICATIONS

High torque applications including flooring, decking, docks, crating, gypsum/sheathing to heavy steel, tile roofing



TOOL SPECIFICATIONS

MODEL NAME ITEM #	DS225-18V 10A0002N	DS222-18V 10B0002N	DS322-18V 10C0002N
Speed (RPM)	0-5000	0-1600, 0-2500 (Selectable)	0-1600, 0-2500 (Selectable)
Voltage	18V	18V	18V
Weight w/ Battery	5.1 lbs (2.3 kg)	5.3 lbs (2.4 kg)	5.4 lbs (2.5 kg)
Height	9.6" (244 mm)	9.6" (244 mm)	9.6" (244 mm)
Length	13.7" (348 mm)	13.7" (348 mm)	14.5" (368 mm)
Width	3.4" (86.4 mm)	3.4" (86.4 mm)	3.4" (86.4 mm)
Warranty	5 yr	5 yr	5 yr
FASTENERS			
FASTENERS ARE LOCATED ON PAGES 8-11			
Range	1"-2"*	1"-2"*	1"-3"
Shank Diameter	#6-#8	#6-#12	#6-#12

*1/2" to 2" with nosepiece sold separately

DS245-AC
2" 120V 5000 RPM COLLATED SCREWDRIVER



TOOL OVERVIEW

- Drives #6 to #10 collated screws 1" to 2" in length
- Patented corner-fit feed system
- Precise depth of drive adjustment with depth lock
- Quick slide button bit change
- Tool-free screw length adjustment
- Variable speed trigger with lock & reverse

APPLICATIONS

High speed applications including drywall (into wood or light gauge steel studs), subfloor, sheathing, cement board, underlayment

DS342-AC
3" 120V 2500 RPM COLLATED SCREWDRIVER



TOOL OVERVIEW

- Drives #6 to #12 collated screws 1" to 3" in length
- Patented corner-fit feed system
- Precise depth of drive adjustment with depth lock
- Quick slide button bit change
- Tool-free screw length adjustment
- Variable speed trigger with lock & reverse

APPLICATIONS

High torque applications including flooring, decking, docks, crating, gypsum/sheathing to steel

DS242-AC
2" 120V 2500 RPM COLLATED SCREWDRIVER



TOOL OVERVIEW

- Drives #6 to #12 collated screws 1" to 2" in length
- Patented corner-fit feed system
- Precise depth of drive adjustment with depth lock
- Quick slide button bit change
- Tool-free screw length adjustment
- Variable speed trigger with lock & reverse

APPLICATIONS

High torque applications including metal framing, decking, gypsum sheathing, sheathing to heavy steel



TOOL SPECIFICATIONS

MODEL NAME ITEM #	DS245-AC 10D0001N	DS242-AC 10E0001N	DS342-AC 10F0001N
Speed (RPM)	0-5000	0-2500	0-2500
Voltage	120V/60Hz	120V/60Hz	120V/60Hz
Current (Amps)	6.0	6.0	6.0
Weight	5.5 lbs (2.5 kg)	5.7 lbs (2.6 kg)	6.7 lbs (3.0 kg)
Height	9.7" (246 mm)	9.7" (246 mm)	9.7" (246 mm)
Length	16.3" (417 mm)	16.4" (417 mm)	17.2" (437 mm)
Width	3.2" (81 mm)	3.2" (81 mm)	3.2" (81 mm)
Warranty	5 yr	5 yr	5 yr
FASTENERS	FASTENERS ARE LOCATED ON PAGES 8-11		
Range	1"-2"*	1"-2"*	1"-3"
Shank Diameter	#6-#10	#6-#12	#6-#12

*1/2" to 2" with nosepiece sold separately

DS532-AC

3" 2500 RPM SCREWDRIVER & ATTACHMENT KIT

**TOOL OVERVIEW**

- Drives #6 to #12 collated screws 1" to 3" in length
- 3-In-1 tool kit
- Feed on return
- Patented sliding screw guide
- Corner-fit feed system
- High-torque 0-2500 rpm motor

APPLICATIONS

For wood & composite decking, cement board, sub-flooring & underlayment, sheathing to steel, steel decking, drywall to wood or steel

DS534-AC

3" 4000 RPM SCREWDRIVER & ATTACHMENT KIT

**TOOL OVERVIEW**

- Drives #6 to #12 collated screws 1" to 3" in length
- 3-In-1 tool kit
- Feed on return
- Patented sliding screw guide
- Corner-fit feed system
- High-speed 0-4000 rpm motor

APPLICATIONS

For sub-flooring, underlayment, wood & composite decking, cement board, drywall to wood, drywall to steel

SG2510

HIGH PERFORMANCE 2500 RPM SCREWDRIVER

**TOOL OVERVIEW**

- Metal gear housing for increased durability & reliability
- Depth sensitive clutch with adjustable nose cone for precise depth control
- 10' cord for greater mobility
- Reversing lever
- Trigger lock

APPLICATIONS

For wood & composite decking, cement boards, sheathing to steel, metal framing, drywall to wood & steel, subfloor, underlayment

SG4100

HIGH PERFORMANCE 4000 RPM SCREWDRIVER

**TOOL OVERVIEW**

- Metal gear housing for increased durability & reliability
- Depth sensitive clutch with adjustable nose cone for precise depth control
- 10' cord for greater mobility
- Reversing lever
- Trigger lock

APPLICATIONS

For drywall (to wood or light steel studs), underlayment, cement boards, wood decks

TOOL SPECIFICATIONS

MODEL NAME ITEM #	DS532-AC 10X0003N	DS534-AC 10X0013N	SG2510 6X0002N	SG4100 6X0004N
Speed (RPM)	0-2500	0-4000	0-2500	0-4000
Current (Amps)	6.5	6.5	6.5	6.5
Weight	7 lbs (3.2 kg)	7 lbs (3.2 kg)	3.6 lbs (1.6 kg)	3.4 lbs (1.5 kg)
Height	7" (178 mm)	7" (178 mm)	7.5" (191 mm)	7.5" (191 mm)
Length	40.5" (1029 mm)	40.5" (1029 mm)	12.5" (318 mm)	12" (305 mm)
Width	2.75" (70 mm)	2.75" (70 mm)	2.5" (64 mm)	2.5" (64 mm)
Warranty	5 yr	5 yr	5 yr	5 yr
FASTENERS		FASTENERS ARE LOCATED ON PAGES 8-11		
Range	1"-3"	1"-3"	-	-
Shank Diameter	#6-#12	#6-#12	-	-

DS230-S1
2" COLLATED SCREWDRIVER ATTACHMENT



TOOL OVERVIEW

- Drives #6 to #12 collated screws 1" to 2" in length
- Patented corner-fit feed system
- Feed on return functionality to improve speed & reliability of drives
- Easily remove attachment to access bit
- Universal nosepiece for drywall & wood applications

APPLICATIONS

Ideal for drywall (into wood or steel studs), metal framing, sheathing, cement board

FOR Senco MODELS:

- SG2510
- SG4100

DS230-D1
2" COLLATED SCREWDRIVER ATTACHMENT (INCLUDES ADAPTER)



TOOL OVERVIEW

- Drives #6 to #12 collated screws 1" to 2" in length
- Patented corner-fit feed system
- Feed on return functionality to improve speed & reliability of drives
- Universal nosepiece for drywall & wood applications

APPLICATIONS

Ideal for drywall (into wood or steel studs), metal framing, sheathing, cement board

FOR DEWALT MODELS (CORDED):

- DW252
- DW253
- DW255
- DW257
- DW266
- DW272
- DW276

TOOL SPECIFICATIONS

MODEL NAME ITEM #	DS230-S1 9Z0001N	DS230-M1 9Z0021N	DS230-D1 9Z0011N	DS230-D2 9Z0012N
Weight	1.3 lbs (.59 kg)	1.3 lbs (.59 kg)	1.3 lbs (.59 kg)	1.3 lbs (.59 kg)
Height	5.5" (140 mm)	5.5" (140 mm)	5.5" (140 mm)	5.5" (140 mm)
Length	11.0" (280 mm)	11.0" (280 mm)	10.8" (274 mm)	10.3" (262 mm)
Width	2.5" (64 mm)	2.5" (64 mm)	2.5" (64 mm)	2.5" (64 mm)
Warranty	5 yr	5 yr	5 yr	5 yr
FASTENERS	FASTENERS ARE LOCATED ON PAGES 8-11			
Range	1"-2"	1"-2"	1"-2"	1"-2"
Shank Diameter	#6-#12	#6-#12	#6-#12	#6-#12

DS230-M1
2" COLLATED SCREWDRIVER ATTACHMENT



TOOL OVERVIEW

- Drives #6 to #12 collated screws 1" to 2" in length
- Patented corner-fit feed system
- Feed on return functionality to improve speed & reliability of drives
- Easily remove attachment to access bit
- Universal nosepiece for drywall & wood applications

APPLICATIONS

Ideal for drywall (into wood or steel studs), metal framing, sheathing, cement board

FOR MAKITA MODELS:

- FS2200
- FS2500
- FS4200
- FS6200
- XSF03
- XSF04
- XSF05

DS230-D2
2" COLLATED SCREWDRIVER ATTACHMENT



TOOL OVERVIEW

- Drives #6 to #12 collated screws 1" to 2" in length
- Patented corner-fit feed system
- Feed on return functionality to improve speed & reliability of drives
- Universal nosepiece for drywall & wood applications

APPLICATIONS

Ideal for drywall (into wood or steel studs), metal framing, sheathing, cement board

FOR DEWALT MODELS (CORDLESS):

- DCF620
- DCF630

DS530-S1

3" COLLATED SCREWDRIVER ATTACHMENT



TOOL OVERVIEW

- Drives #6 to #12 collated screws 1" to 3" in length
- Feed on return
- Patented sliding screw guide
- Corner-fit feed system
- Quick release clamp

APPLICATIONS

Sheathing, decking, underlayment, sub-flooring, steel decking, drywall, cement board, rigid foam insulation

FOR SENC0 MODELS:

- SG2510
- SG4100

DS530-M1

3" COLLATED SCREWDRIVER ATTACHMENT



TOOL OVERVIEW

- Drives #6 to #12 collated screws 1" to 3" in length
- Feed on return
- Patented sliding screw guide
- Corner-fit feed system
- Quick release clamp

APPLICATIONS

Sheathing, decking, underlayment, sub-flooring, steel decking, drywall, cement board, rigid foam insulation

FOR MAKITA MODELS:

- FS2200
- FS2500
- FS4200
- FS6200
- XSF03
- XSF04
- XSF05

DS530-D1

3" COLLATED SCREWDRIVER ATTACHMENT



TOOL OVERVIEW

- Drives #6 to #12 collated screws 1" to 3" in length
- Feed on return
- Patented sliding screw guide
- Corner-fit feed system
- Quick release clamp

APPLICATIONS

Sheathing, decking, underlayment, sub-flooring, steel decking, drywall, cement board, rigid foam insulation

FOR DEWALT MODELS:

- DCF624
- DW252
- DW253
- DW255
- DW257
- DW266
- DW272
- DW276



DS530 SERIES

TOOL SPECIFICATIONS


MODEL NAME ITEM #	DS530-S1 10X0002N	DS530-M1 10X0022N	DS530-D1 10X0012N
Weight	3.4 lbs (1.5 kg)	3.4 lbs (1.5 kg)	3.4 lbs (1.5 kg)
Height	3.5" (89 mm)	3.5" (89 mm)	3.5" (89 mm)
Length	33" (838 mm)	33" (838 mm)	33" (838 mm)
Width	2.75" (70 mm)	2.75" (70 mm)	2.75" (70 mm)
Warranty	5 yr	5 yr	5 yr
FASTENERS			
FASTENERS ARE LOCATED ON PAGES 8-11			
Range	1"-3"	1"-3"	1"-3"
Shank Diameter	#6-#12	#6-#12	#6-#12

Additional bits, adapters & nosepieces sold separately, see pages 12-13



DRYWALL TO WOOD

+ #2 PHILLIPS **U** BUGLE **⚡** SHARP



Gauge	Length	Finish	Thread	Quantity	Item Code
6	1¼"	Gray Phosphate	Coarse	1000 Tub	06A125P
6	1¼"	Gray Phosphate	Coarse	4000 Box	06A125PB
6	1⅝"	Gray Phosphate	Coarse	1000 Tub	06A162P
6	1⅝"	Gray Phosphate	Coarse	4000 Box	06A162PB
7	2"	Gray Phosphate	Coarse	1000 Tub	07A200P
8	2½"	Gray Phosphate	Coarse	1000 Box	08A250PK
6	1⅝"	Epoxy E-Coat/Green	Coarse	1000 Tub	06A162W



DRYWALL TO LIGHT STEEL

+ #2 PHILLIPS **U** BUGLE **⚡** SHARP




Gauge	Length	Finish	Thread	Quantity	Item Code
6	1¼"	Gray Phosphate	Fine	1000 Tub	06B125P*
6	1¼"	Gray Phosphate	Fine	4000 Box	06B125PB*
6	1⅝"	Gray Phosphate	Fine	1000 Tub	06B162P*
6	1⅝"	Gray Phosphate	Fine	4000 Box	06B162PB*
6	2"	Gray Phosphate	Fine	4000 Box	06B200PB*



GYPSUM TO STEEL

+ #2 PHILLIPS **U** BUGLE **⚡** DRILL



Gauge	Length	Finish	Thread	Quantity	Item Code
6	1¼"	Gray Phosphate	Fine	4000 Box	06C125PB*
6	1⅝"	Gray Phosphate	Fine	4000 Box	06C162PB*
6	2"	Gray Phosphate	Fine	4000 Box	06C200PB*
6	1¼"	Clear Zinc	Fine	4000 Box	06C125CB*
6	1⅝"	Clear Zinc	Fine	4000 Box	06C162CB*
6	2"	Clear Zinc	Fine	4000 Box	06C200CB*
6	1¼"	Epoxy E-Coat/Green	Fine	1000 Box	06C125WK*
6	1⅝"	Epoxy E-Coat/Green	Fine	1000 Box	06C162WK*
8	3"	Epoxy E-Coat/Green	Fine	1000 Box	08C300WK*



WOOD TO WOOD

+ #2 PHILLIPS **U** TRIM HEAD & NIBS **⚡** SHARP



Gauge	Length	Finish	Thread	Quantity	Item Code
7	1"	Gray Phosphate	High Low	4000 Box	07Q100PB




WOOD TO WOOD (CONT.)

■ #2 SQUARE **U** TRIM HEAD & NIBS **⚡** SHARP



Gauge	Length	Finish	Thread	Quantity	Item Code
7	1¼"	Gray Phosphate	High Low	4000 Box	07Q125PBQ

■ #2 SQUARE **U** FLAT **⚡** SHARP



Gauge	Length	Finish	Thread	Quantity	Item Code
8	1½"	Yellow Zinc	Coarse	1000 Tub	08F150Y
8	1¾"	Yellow Zinc	¾ Coarse	1000 Tub	08F175Y
8	2"	Yellow Zinc	¾ Coarse	1000 Tub	08F200Y
8	2½"	Yellow Zinc	¾ Coarse	800 Tub	08F250Y
8	2½"	Yellow Zinc	¾ Coarse	1000 Box	08F250YK
8	3"	Yellow Zinc	¾ Coarse	800 Tub	08F300Y
8	3"	Yellow Zinc	¾ Coarse	1000 Box	08F300YK

■ #2 SQUARE **U** FLAT **⚡** TYPE 17




Gauge	Length	Finish	Thread	Quantity	Item Code
8	1¼"	Clear Zinc	Coarse	4000 Box	08L125CBLCTS

✱ REX **U** FLAT **⚡** TYPE 17



Gauge	Length	Finish	Thread	Quantity	Item Code
8	1½"	Yellow Zinc	Double	1000 Box	08F150YTK
8	1½"	Yellow Zinc	Double	1000 Tub	08F150YTT
8	1¾"	Yellow Zinc	Double	1000 Tub	08F175YTT
8	1¾"	Yellow Zinc	Double	4000 Box	08F175YTB
8	2"	Yellow Zinc	Double	1000 Tub	08F200YTT
8	2½"	Yellow Zinc	Double	800 Tub	08F250YTT
8	3"	Yellow Zinc	Double	800 Tub	08F300YTT
8	3"	Yellow Zinc	Double	1000 Box	08F300YTK

■ #2 SQUARE **U** FLAT **⚡** TYPE 17



Gauge	Length	Finish	Thread	Quantity	Item Code
8	1¾"	Yellow Zinc	Coarse	4000 Box	08L175YB



*ICC CERTIFIED - ESR4826
Test data available online:
www.senco.com/screw-specs/

Suitable for exterior applications




WOOD TO WOOD (CONT.)



Gauge	Length	Finish	Thread	Quantity	Item Code
8	2"	Yellow Zinc	High Low	4000 Box	08F200YBTHSS



DECKING TO WOOD




MIAMI-DADE COUNTY
LISTED


Gauge	Length	Finish	Thread	Quantity	Item Code
8	1 3/4"	Epoxy E-Coat/Tan	3/8 Coarse	1000 Tub	08D175W
8	2"	Epoxy E-Coat/Tan	3/8 Coarse	1000 Tub	08D200W**
8	2 1/2"	Epoxy E-Coat/Tan	3/8 Coarse	800 Tub	08D250W**
8	2 1/2"	Epoxy E-Coat/Tan	3/8 Coarse	1000 Box	08D250WK**
8	3"	Epoxy E-Coat/Tan	3/8 Coarse	800 Tub	08D300W**
8	3"	Epoxy E-Coat/Tan	3/8 Coarse	1000 Box	08D300WK**
8	2 1/2"	Stainless	3/8 Coarse	800 Tub	08D250S
9	3"	Stainless	3/8 Coarse	800 Tub	09D300S



COMPOSITE DECKING TO WOOD




Gauge	Length	Finish	Thread	Quantity	Item Code
8	2 1/2"	Epoxy E-Coat/Tan	Coarse	800 Tub	08R250W
8	3"	Epoxy E-Coat/Tan	Coarse	800 Tub	08R300W



Gauge	Length	Finish	Thread	Quantity	Item Code
8	2 1/2"	Epoxy E-Coat/Gray	Multi-Thread	800 Tub	08S250W003
8	2 1/2"	Epoxy E-Coat/Brown	Multi-Thread	800 Tub	08S250W497
8	2 1/2"	Epoxy E-Coat/Tan	Multi-Thread	800 Tub	08S250W592



WOOD TO LIGHT STEEL



Gauge	Length	Finish	Thread	Quantity	Item Code
8	1 1/2"	Clear Zinc	Double	1000 Tub	08G150CTLDSS
8	1 1/2"	Clear Zinc	Double	1000 Box	08G150CSK

Suitable for exterior applications



WOOD TO LIGHT STEEL (CONT.)



Gauge	Length	Finish	Thread	Quantity	Item Code
8	1"	Clear Zinc	Fine	4000 Box	08G100CBWFDS
10	1 1/4"	Clear Zinc	Fine	4000 Box	10G125CBWFDS



WOOD TO STEEL



Gauge	Length	Finish	Thread	Quantity	Item Code
8	2"	Clear Zinc	Fine	1000 Box	08G200CKLFPS*



Gauge	Length	Finish	Thread	Quantity	Item Code
8	1 5/8"	Clear Zinc	Fine	1000 Tub	08G162CTWFWS*
8	1 5/8"	Clear Zinc	Fine	1000 Box	08G162CWK*
10	1 5/8"	Clear Zinc	Fine	1000 Tub	10G162CWK*
8	2"	Epoxy E-Coat/Green	Fine	1000 Tub	08G200WWK*
8	2 1/2"	Epoxy E-Coat/Green	Fine	1000 Box	08G250WWK*



Gauge	Length	Finish	Thread	Quantity	Item Code
12	1 3/4"	Yellow Zinc	Fine	1000 Box	12G175YKLFAX*



Gauge	Length	Finish	Thread	Quantity	Item Code
12	2"	Yellow Zinc	Fine	1000 Box	12G200YKLFCE*
12	2 1/2"	Yellow Zinc	Fine	1000 Box	12G250YKLFCE*

MIAMI-DADE COUNTY
LISTED

**Approved for use in
Miami-Dade County, FL.



*ICC CERTIFIED - ESR4826
Test data available online:
www.senco.com/screw-specs/




LIGHT METAL TO METAL

#2 PHILLIPS

MOD TRUSS

SHARP



Gauge	Length	Finish	Thread	Quantity	Item Code
8	1/2"	Clear Zinc	Fine	1000 Box	08M050CSK*
10	3/4"	Clear Zinc	Fine	1000 Box	10M075CSK*

#2 PHILLIPS

MOD TRUSS

DRILL



Gauge	Length	Finish	Thread	Quantity	Item Code
8	1/2"	Clear Zinc	Fine	1000 Box	08M050CDK*
10	3/4"	Clear Zinc	Fine	1000 Box	10M075CDK*



METAL TO METAL

#2 SQUARE

FLAT PAN

DRILL



Gauge	Length	Finish	Thread	Quantity	Item Code
10	3/4"	Clear Zinc	Fine	1000 Box	10M075CDK2*
10	1"	Clear Zinc	Fine	1000 Box	10M100CKMFDS*

REX

FLAT PAN

DRILL




Gauge	Length	Finish	Thread	Quantity	Item Code
10	3/4"	Yellow Zinc	Fine	1000 Box	10M075YDK*

REX

FLAT PAN

#4 DRILL



Gauge	Length	Finish	Thread	Quantity	Item Code
10	3/4"	Yellow Zinc	Fine	8000 Loose	10M075YLFT4X*
10	3/4"	Yellow Zinc	Fine	1000 Box	10M075YKFT4X*
10	3/4"	E1000/Clear	Fine	4000 Box	10M075EBFT4X*
10	3/4"	E1000/White	Fine	4000 Box	10M075E1114B*
10	3/4"	E1000/Black	Fine	4000 Box	10M075E0004B*
10	3/4"	E1000/Charcoal Gray	Fine	4000 Box	10M075E0014B*
10	3/4"	E1000/Silver Frost	Fine	4000 Box	10M075E0024B*

REX

FLAT PAN

#4 DRILL



Gauge	Length	Finish	Thread	Quantity	Item Code
12	7/8"	Yellow Zinc	Fine	1000 Box	12M087YKFF4X*

REX

FLAT PAN

#3 DRILL



Gauge	Length	Finish	Thread	Quantity	Item Code
12	1"	Yellow Zinc	Fine	1000 Box	12M100YKFF3X*



*ICC CERTIFIED - ESR3558
Test data available online:
www.senco.com/screw-specs/

Suitable for exterior applications



TRAILER SKIN REPAIR




REX



FLAT PAN



#4 DRILL



Gauge	Length	Finish	Thread	Quantity	Item Code
12	7/8"	E1000/Clear	Fine	150 Loose	12M087ELFF4X
12	7/8"	E1000/Black	Fine	150 Loose	12M087E000LFF4X
12	7/8"	E1000/White	Fine	150 Loose	12M087E111LFF4X



CEMENT BOARD TO WOOD



#2 SQUARE



WAFER & NIBS



SPOON



Gauge	Length	Finish	Thread	Quantity	Item Code
8	1 1/4"	Epoxy E-Coat/Green	High Low	1000 Tub	08T125W
8	2"	Epoxy E-Coat/Green	High Low	1000 Tub	08T200W



CEMENT BOARD TO STEEL



#2 SQUARE



WAFER & NIBS



DRILL



Gauge	Length	Finish	Thread	Quantity	Item Code
8	1 1/2"	Epoxy E-Coat/Green	Fine	4000 Box	08T150WBWFD5



SPECIALTY APPLICATIONS



#2 SQUARE



PAN FRAMING



SHARP



Gauge	Length	Finish	Thread	Quantity	Item Code
8	1"	Clear Zinc	Double	4000 Box	08M100CBPDSS




#2 SQUARE



ROUND WASHER



TYPE 17



Gauge	Length	Finish	Thread	Quantity	Item Code
8	1 1/4"	Clear Zinc	Coarse	4000 Box	08X125CBACTS



#2 SQUARE



ROUND WASHER



DRILL



Gauge	Length	Finish	Thread	Quantity	Item Code
8	1 1/4"	Clear Zinc	Double	1000 Box	08X125CKADDS*
8	2"	Clear Zinc	Double	1000 Box	08X200CKADDS*

Suitable for exterior applications



*ICC CERTIFIED - ESR4826
Test data available online:
www.senco.com/screw-specs/

BITS

FOR SENCO AUTO-FEED SCREWDRIVERS & SELECT PAMFAST MODELS									
Quantity	Length	⊕ ITEM #	⊖ ITEM #	⊛ ITEM #	Integrated auto-feed screwdrivers			Auto-feed attachments & kits	PAM-Fast
2 Pack	6⅞	EA0297	EA0298	EA0299	●	●	●		
25 Pack	6⅞	EA0297N*	EA0298N*	EA0299N*	●	●	●		
2 Pack	7⅞	EA0400	EA0401	EA0402		●			
2 Pack	7⅞	EA0300	EA0301	EA0302				●	
25 Pack	7⅞	-	EA0301N*	-				●	
2 Pack	8⅞	EA0314	EA0315	EA0316				●	●
25 Pack	8⅞	-	EA0315N*	EA0316N*				●	●
2 Pack	5½	-	EA0396P	EA0397P					●
					DS222-18V	DS225-18V	DS322-18V	DS242-AC	DS245-AC
								DS342-AC	
								DS230 SERIES	
								DS530 SERIES	
								DS532-AC	
								DS534-AC	
									SELECT MODELS

*Impact bits for use in metal applications



BITS

LOOSE BIT TIP

FOR ¼" CHUCK				
Quantity	Chuck	Type	⊛ ITEM #	Compatible With
10 Pack	¼"	Rex	EA0308	● SG2510 ● SG4100



BIT TIP
EA0308

DS530 SERIES ADAPTERS

FOR ATTACHING SCREWDRIVERS TO DS530 ATTACHMENTS				
Quantity	ITEM #	SENCO	DeWALT	MAKITA
1	MB0184	●		
1	MB0185		●	
1	MB0183		●	
1	MB0186			●
1	MB0187			●
		SG2510	DW252	FS2701
		SG4100	DW253	XSFO5
			DW255	XSFO4
			DW257	XSFO3
			DW266	FS6200
			DW272	FS4200
			DW276	FS2500
			DCF624	FS2200



MB0183



MB0184



MB0185



MB0186



MB0187

NOSEPIECES

FOR SENCO AUTO-FEED SCREWDRIVERS & ATTACHMENTS

Quantity	Application	Range	ITEM #	Integrated auto-feed screwdrivers						Auto-feed attachments & kits			
1	Wood	1"-2"	FB0157	●	●	●	●	●	●				
1	Drywall	1"-2"	FB0181	●	●	●	●	●	●				
1	Metal Channel	½"-1"	FB0155	●	●	●	●	●	●				
1	Metal Framing	½"-1"	FB0178	●	●	●	●	●	●				
1	General	1"-2"	FC1022	●	●	●	●	●	●				
1	Wood	1"-3"	FB0159			●			●	●	●	●	●
1	Metal Channel	½"-1"	FB0187			●			●	●	●	●	●
1	Metal Framing	1"-2"	FB0185			●			●	●	●	●	●
1	General	1"-3"	FC1023			●			●	●	●	●	●
				DS222-18V	DS225-18V	DS322-18V	DS242-AC	DS245-AC	DS342-AC	DS230 SERIES	DS530 SERIES	DS532-AC	DS534-AC



FB0157
(WOOD)



FB0155
(METAL
CHANNEL)



FB0181
(DRYWALL)



FC1022
(GENERAL)



FB0178
(METAL
FRAMING)

REPLACEMENT PADS

FOR USE ON NOSEPIECES

Fits Nosepieces	Description	Quantity	ITEM #
FB0178, FB0185, FC0822, FC0887	Round no-mar pad with adhesive	3	FC0983
FB0157, FB0159	Square non-skid pad with adhesive	3	FA0334
FC1022, FC1023	No-mar pad with clip	1	HA0332



FC0983



FA0334



HA0332

FINISH & WOODWORKING

THE DIFFERENCE IS IN THE DETAILS

SENCO has set the industry standard for pneumatic finish and fine woodworking tools that are compact, ultra-light, easy-to-use and designed for precision and longevity.

We offer a broader range of tools than anyone else, covering 15–23 gauge nailers and 16–19 gauge staplers, including the industry benchmark FinishPro®42XP.

APPLICATIONS

Cabinetry, furniture, decorative trim, crown molding, custom woodworking applications and all other finish needs.

KEY FEATURES

- Quick clear latch to clear jams fast
- No-mar pads to protect woodwork
- Clear line-of-sight for precision fastening
- Comfort grip
- Adjustable depth of drive

Experience FUSION® award-winning cordless convenience in all-day, everyday trim tools.

APPLICATIONS

Finish and trim, fine woodworking, cabinet, furniture, decorative trim.

KEY FEATURES

- FUSION® cordless air-power technology
- Selectable drive switch allows for contact or sequential trigger actuation
- Nose-mounted LED light
- Adjustable belt hook
- Thumb wheel depth of drive
- Quick clear latch feature for quickly clearing jams
- Includes storage bag, battery and charger



LS61H1P

F-18XP

2½" 18 GA. CORDLESS BRAD NAILER

18 GA
BRAD**TOOL OVERVIEW**

- Drives 18 GA. brad nails ⅝" to 2½" in length
- Fusion cordless air-power technology
- No hose, compressor or fuel cell needed
- Pneumatic-like response with no ramp-up time

APPLICATIONS

Finish & trim, woodworking, paneling, casing, molding, chair rail, decorative trim

F-16XP

2½" 16 GA. CORDLESS FINISH NAILER

16 GA
STRAIGHT**TOOL OVERVIEW**

- Drives 16 GA. finish nails ¾" to 2½" in length
- Fusion cordless air-power technology
- No hose, compressor or fuel cell needed
- Pneumatic-like response with no ramp-up time

APPLICATIONS

Finish & trim, woodworking, baseboards, casing, door & window jambs, moldings, cabinets

F-15XP

2½" 15 GA. CORDLESS FINISH NAILER

15 GA
DA**TOOL OVERVIEW**

- Drives 15 GA. angled finish nails 1¼" to 2½" in length
- Fusion cordless air-power technology
- No hose, compressor or fuel cell needed
- Pneumatic-like response with no ramp-up time

APPLICATIONS

Finish & trim, woodworking, baseboards, casing, door & window jambs, moldings, cabinets

F-LXP

18 GA. ¼" CROWN, 1½" CORDLESS FINISH STAPLER

18 GA
L**TOOL OVERVIEW**

- Drives 18 GA. ¼" crown staples ⅝" to 1½" in length
- Fusion cordless air-power technology
- No hose, compressor or fuel cell needed
- Pneumatic-like response with no ramp-up time

APPLICATIONS

Cabinets, soffits, drawer assembly

TOOL SPECIFICATIONS

MODEL NAME ITEM #	F-18XP 10M0001N	F-16XP 10N0001N	F-15XP 10L0001N	F-LXP 10Y0001N
Trigger	Selectable	Selectable	Selectable	Selectable
Technology	FUSION®	FUSION®	FUSION®	FUSION®
Power Type	Cordless	Cordless	Cordless	Cordless
Weight	6.6 lbs (3.0 kg)	6.7 lbs (3.1 kg)	6.8 lbs (3.1 kg)	6.8 lbs (3.1 kg)
Height	12.5" (318 mm)	12.5" (318 mm)	12.5" (318 mm)	12.5" (318 mm)
Length	10.2" (259 mm)	11.6" (295 mm)	12.6" (320 mm)	10.4" (264 mm)
Width	3.9" (99 mm)	3.9" (99 mm)	5.3" (135 mm)	3.9" (99 mm)
Charge Time	80% in 15 minutes, 100% in 45 minutes	80% in 15 minutes, 100% in 45 minutes	80% in 15 minutes, 100% in 45 minutes	80% in 15 minutes, 100% in 45 minutes
Warranty	5 yrs	5 yrs	5 yrs	5 yrs
FASTENERS	FASTENERS ARE LOCATED ON PAGES 23-25			
Gauge	18	16	15	18
Crown	-	-	-	¼"
Range	⅝"-2½"	¾"-2½"	1¼"-2½"	⅝"-1½"
Capacity	110	110	110	110
Angle/Collation	Straight Glued Strip	Straight Glued Strip	34° Angled Taped Strip	Straight Glued Strip

TN11G1
1½" 23 GA. PINNER



23^{GA}
PIN

TOOL OVERVIEW

- Drives 23 GA. headless pins ½" to 1½" in length
- NEVERLUBE® oil-free design
- Magazine automatically adjusts for fastener length
- Ergonomic angled "pistol-grip" handle
- Ultra-narrow nosepiece

APPLICATIONS

Fine woodworking, molding & decorative trim

TN11G1P
1½" 23 GA. PINNER



23^{GA}
PIN

TOOL OVERVIEW

- Drives 23 GA. headless pins ½" to 1½" in length
- Oil-less design eliminates the need for routine lubrication
- Dry fire lockout reduces tool wear & indicates when to reload
- Ultra-narrow nosepiece allows access to tight corners & other hard to reach areas

APPLICATIONS

Fine woodworking, molding & decorative trim

TOOL SPECIFICATIONS

MODEL NAME ITEM #	TN11G1	TN11L1	TN11G1P1
Trigger	Sequential	Sequential	Sequential
Operating Pressure	70-100 psi (4.8-6.9 bar)	70-110 psi (4.8-7.6 bar)	70-100 psi (4.8-6.9 bar)
Air Consumption (60 CPM)	1.1 scfm	1.1 scfm	1.1 scfm
Air Inlet	¼" NPT	¼" NPT	¼" NPT
Weight	2.41 lbs (1.09 kg)	2.86 lbs (1.3 kg)	2.3 lbs (1.0 kg)
Height	7.8" (198 mm)	9.2" (233 mm)	7.5" (191 mm)
Length	8.57" (218 mm)	8.69" (220 mm)	7.5" (191 mm)
Width	2.6" (66 mm)	2.6" (66 mm)	1.9" (48 mm)
Main Body Material	Aluminum	Aluminum	Aluminum
Warranty	5 yrs	5 yrs	5 yrs
FASTENERS	FASTENERS ARE LOCATED ON PAGE 22		
Gauge	23	23	23
Range	½"-1½"	½"-2"	½"-1½"
Capacity	100	100	100
Angle/Coilation	Straight Glued Strip	Straight Glued Strip	Straight Glued Strip

TN11L1
2" 23 GA. PINNER



23^{GA}
PIN

TOOL OVERVIEW

- Drives 23 GA. straight strip micro pins ½" to 2" in length
- NEVERLUBE® oil-free design
- Magazine automatically adjusts for fastener length
- Ergonomic angled "pistol-grip" handle
- Ultra-narrow nosepiece

APPLICATIONS

Fine woodworking, molding & decorative trim



TN11G1P

TN21L1

2" 21 GA. PINNER



21
GA
PIN

TOOL OVERVIEW

- Drives 21 GA. pins 5/8" to 2" in length
- NEVERLUBE® oil-free design
- Magazine automatically adjusts for fastener length
- Ergonomic angled "pistol-grip" handle
- Ultra-narrow nosepiece
- Reversible belt hook

APPLICATIONS

Fine woodworking, molding & decorative trim

BN31M1P

2 1/8" 18 GA. BRAD NAILER



18
GA
BRAD

TOOL OVERVIEW

- Drives 18 GA. brad nails 5/8" to 2 1/8" in length
- Oil-less design eliminates the need for routine lubrication
- Dry fire lockout reduces tool wear & indicates when to reload
- Selectable trigger to switch between contact or sequential firing modes

APPLICATIONS

Finish & trim, woodworking, paneling, casing, molding, chair rail, decorative trim

LS1XP

1" 18 GA. HEADLESS BRAD NAILER



18
GA
BRAD

TOOL OVERVIEW

- Drives 18 GA. headless brad nails 1/2" to 1" in length
- NEVERLUBE® oil-free design
- Aluminum housing reduces weight & provides superior durability
- Low load indicator allows the user to quickly identify when it's time to reload

APPLICATIONS

Finish & woodworking, cabinets, paneling, casing



TN21L1

TOOL SPECIFICATIONS

MODEL NAME ITEM #	TN21L1	LS1XP 8N0001N	BN31M1P
Trigger	Sequential	Sequential	Selectable
Operating Pressure	70-110 psi (4.8-7.6 bar)	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)
Air Consumption (60 CPM)	1.1 scfm	1.92 scfm	2.4 scfm
Air Inlet	1/4" NPT	1/4" NPT	1/4" NPT
Weight	3.16 lbs (1.43 kg)	2.9 lbs (1.3 kg)	3.0 lbs (1.4 kg)
Height	9.2" (233 mm)	8.25" (210 mm)	9.75" (248 mm)
Length	8.76" (222 mm)	9" (229 mm)	10.5" (267 mm)
Width	2.6" (66 mm)	2" (51 mm)	2.5" (63.5 mm)
Main Body Material	Aluminum	Aluminum	Aluminum
Warranty	5 yrs	5 yrs	5 yrs
FASTENERS			
FASTENERS ARE LOCATED ON PAGES 22-23			
Gauge	21	18	18
Range	5/8"-2"	1/2"-1"	5/8"-2 1/8"
Capacity	200	100	110
Angle/Collation	Straight Glued Strip	Straight Glued Strip	Straight Glued Strip

SLP20XP
1½" 18 GA. BRAD NAILER



18
GA
BRAD

TOOL OVERVIEW

- Drives 18 GA. brad nails ⅝" to 1½" in length
- Drives both slight & medium headed brad nails
- Never-Lube® design indicates maintenance-free operation, eliminating the risk of oil spillover onto the work surface

APPLICATIONS

Finish & trim, cabinets, molding, upholstery, paneling, casing

TN41P1P
2½" 16 GA. FINISH NAILER



16
GA
STRAIGHT

TOOL OVERVIEW

- Drives 16 GA. finish nails 1¼" to 2½" in length
- Oil-less design eliminates the need for routine lubrication
- Dry fire lockout reduces tool wear, indicates when to reload
- Selectable trigger to switch between contact or sequential firing modes

APPLICATIONS

Finish & trim, woodworking, baseboards, casing, door & window jambs, moldings, cabinets

FINISHPRO®25XP
2½" 18 GA. BRAD NAILER



18
GA
BRAD

TOOL OVERVIEW

- Drives 18 GA. brad nails ⅝" to 1½" in length
- Drives both slight & medium headed brads
- Never-Lube® design indicates maintenance-free operation, eliminating the risk of oil spillover onto the work surface
- Tool-free depth adjustment for consistent flush or countersunk drives

APPLICATIONS

Finish & woodworking, cabinets, paneling, casing



TN41P1P

TOOL SPECIFICATIONS

MODEL NAME ITEM #	SLP20XP 430101N	FINISHPRO®25XP 760102N	TN41P1P
Trigger	Sequential	Sequential	Selectable
Operating Pressure	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)
Air Consumption (60 CPM)	1.92 scfm	1.92 scfm	2.22 scfm
Air Inlet	¼" NPT	¼" NPT	¼" NPT
Weight	2.3 lbs (1 kg)	2.7 lbs (1.2 kg)	4.6 lbs (2.1 kg)
Height	8.25" (210 mm)	9.9" (251 mm)	11.4" (290 mm)
Length	9.5" (241 mm)	9.8" (249 mm)	12" (305 mm)
Width	2" (50.8 mm)	2.2" (56 mm)	4" (102 mm)
Main Body Material	Aluminum	Aluminum	Aluminum
Warranty	5 yrs	5 yrs	5 yrs
FASTENERS	FASTENERS ARE LOCATED ON PAGES 23-24		
Gauge	18	18	16
Range	⅝"-1½"	⅝"-2½"	1¼"-2½"
Capacity	110	110	110
Angle/Collection	Straight Glued Strip	Straight Glued Strip	Straight Glued Strip

FINISHPRO®30XP

2" 15 GA. ANGLED FINISH NAILER



15^{GA}
DA

TOOL OVERVIEW

- Drives 15 GA. angled finish nails 1" to 2" in length
- Never-Lube® design indicates maintenance-free operation, eliminating the risk of oil spillover onto the work surface
- Tool-free depth adjustment for consistent flush or countersunk drives

APPLICATIONS

Finish & woodworking, cabinets, paneling, casing

FINISHPRO®42XP

2½" 15 GA. ANGLED FINISH NAILER



15^{GA}
DA

TOOL OVERVIEW

- Drives 15 GA. 34° finish nails 1¼" to 2½" in length
- Never-Lube® design indicates maintenance-free operation, eliminating the risk of oil spillover onto the work surface
- Tool-free depth adjustment for consistent flush or countersunk drives

APPLICATIONS

Finish & trim

TN51P1P

2½" 15 GA. FINISH NAILER



15^{GA}
DA

TOOL OVERVIEW

- Drives 15 GA. angled finish nails 1¼" to 2½" in length
- Oil-less design eliminates the need for routine lubrication
- Dry fire lockout reduces tool wear & indicates when to reload
- Selectable trigger to switch between contact or sequential firing modes
- Quick clear latch to easily clear jams or misfeeds

APPLICATIONS

Finish & trim, woodworking, baseboards, casing, door & window jams, moldings, cabinets



FINISHPRO®30XP

TOOL SPECIFICATIONS

MODEL NAME ITEM #	FINISHPRO®30XP 9P0002N	TN51P1P	FINISHPRO®42XP 4G0001N
Trigger	Sequential	Selectable	Sequential
Operating Pressure	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)
Air Consumption (60 CPM)	2.16 scfm	3.2 scfm	3.87 scfm
Air Inlet	¼" NPT	¼" NPT	¼" NPT
Weight	3.8 lbs (1.73 kg)	4.5 lbs (2.0 kg)	4.7 lbs (2.1 kg)
Height	9.63" (244.6 mm)	12.25" (311 mm)	11.25" (286 mm)
Length	12" (305 mm)	13" (330 mm)	13" (330 mm)
Width	3.25" (82.5 mm)	3.5" (89 mm)	3.5" (89 mm)
Main Body Material	Magnesium	Aluminum	Magnesium
Warranty	5 yrs	5 yrs	5 yrs
FASTENERS		FASTENERS ARE LOCATED ON PAGE 24	
Gauge	15	15	15
Range	1"-2"	1¼"-2½"	1¼"-2½"
Capacity	104	110	104
Angle/Collation	34° Angled Tape Strip	34° Angled Tape Strip	34° Angled Tape Strip

SLS20XP

3/16", 1/4", 3/8" CROWNS, 1 1/2" 18/19 GA. FINISH STAPLER



TOOL OVERVIEW

- Drives 18/19 GA. 3/16", 1/4", 3/8" crown staples 1 1/2" in length
- Never-Lube® design indicates maintenance-free operation, eliminating the risk of oil spillover onto the work surface
- Ultra-lightweight for ease of use & maneuverability
- Quick clear latch to easily clear jams or misfeeds

APPLICATIONS

Upholstery, paneling, trim, sheathing, siding

SKSXP

1/4", 3/8", 7/16" CROWNS, 1 1/2" 16/18 GA. FINISH STAPLER



TOOL OVERVIEW

- Drives 16/18 GA. 1/4", 3/8", 7/16" crown staples 1 1/2" in length
- Never-Lube® design indicates maintenance-free operation, eliminating the risk of oil spillover onto the work surface
- Long 1" lip fits into tight spots

APPLICATIONS

Finish & woodworking

TOOL SPECIFICATIONS

MODEL NAME ITEM #	SLS20XP ITEM # - SEE ABOVE	SLS25XP ITEM # - SEE ABOVE	SKSXP ITEM # - SEE ABOVE
Trigger	Sequential	Contact	Sequential
Operating Pressure	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)
Air Consumption (60 CPM)	1.92 scfm	1.92 scfm	2.16 scfm
Air Inlet	1/4" NPT	1/4" NPT	1/4" NPT
Weight	2.5 lbs (1.13 kg)	2.67 lbs (1.21 kg)	4.2 lbs (1.9 kg)
Height	8.5" (216 mm)	9" (229 mm)	9.25" (238 mm)
Length	12" (305 mm)	12" (305 mm)	12.38" (314 mm)
Width	2" (50.8 mm)	2" (50.8 mm)	3" (76 mm)
Main Body Material	Aluminum	Aluminum	Aluminum
Warranty	5 yrs	5 yrs	5 yrs
FASTENERS			
FASTENERS ARE LOCATED ON PAGES 25-26			
Gauge	19, 18	18	18, 16
Crown	3/16", 1/4", 3/8"	1/4", 3/8"	1/4", 3/8", 7/16"
Range	3/8"-1 1/2"	3/8"-1 1/2"	3/4"-1 1/2"
Capacity	168	168	145
Angle/Collation	Straight Glued Strip	Straight Glued Strip	Straight Glued Strip

SLS25XP

1/4", 3/8" CROWNS, 1 1/2" 18 GA. FINISH STAPLER



TOOL OVERVIEW

- Drives 18 GA. 1/4", 3/8" crown staples 1 1/2" in length
- Never-Lube® design indicates maintenance-free operation, eliminating the risk of oil spillover onto the work surface
- Ultra-lightweight for ease of use & maneuverability
- Quick clear latch to easily clear jams or misfeeds

APPLICATIONS

Trim, cabinet frame & drawer assembly, sheathing, paneling, underlayment, siding

SLS20XP, SLS25XP & SKSXP ITEM CODE CHART

MODEL	CROWN	ITEM #
SLS20XP-K	1/4"	490101N
SLS20XP-L	1/4"	490103N
SLS20XP-L W/CASE	1/4"	490105N
SLS20XP-L SENCOMATIC	1/4"	490015N
SLS20XP-M	3/8"	490107N
SLS20XP-R	3/16"	490111N
SLS25XP-L	1/4"	820103N
SLS25XP-M	3/8"	820107N
SKSXP-L	1/4"	300120N
SKSXP-M	3/8"	300152N
SKSXP-N	7/16"	300184N

LS61H1P

18 GA. 1/4" CROWN, 1 1/2" FINISH STAPLER



18^{GA}
L

TOOL OVERVIEW

- Drives 18 GA. 1/4" crown staples 3/8" to 1 1/2" in length
- Oil-less design eliminates the need for routine lubrication
- Selectable trigger to switch between contact or sequential firing modes
- Tool-free depth adjustment for consistent flush or countersunk drives

APPLICATIONS

Woodworking, cabinets, soffits, drawer assembly

SC2 SENCOR®

1" CROWN, 1/2" 25 GA. CORRUGATED FASTENER



25^{GA}
SENCOR

TOOL OVERVIEW

- Drives 25 GA. Sencor® corrugated fasteners 1/4" to 1/2" in length
- Sencor® corrugated fasteners provide twice the joint strength of ordinary fasteners
- Eliminates milling, doweling, clamping, screwing & other time-consuming, cost adding operations

APPLICATIONS

Joint fastening in wood, crate, pallet, truss & box assembly

SC1XP SENCLAMP®

7/16" CROWN, 9/16" 25 GA. SENCLAMP® FASTENER



25^{GA}
SENCLAMP

TOOL OVERVIEW

- Drives 25 GA. Senclamp® joint fasteners 5/16" to 9/16" in length
- Senclamp® fasteners pull the joint together when driving ensuring a tight, permanent fit
- Eliminates milling, doweling, clamping, screwing & other time-consuming, cost adding operations
- High-carbon steel fastener derives added strength from its special webbed design

APPLICATIONS

Joint fastening in wood



LS61H1P

TOOL SPECIFICATIONS

MODEL NAME ITEM #	LS61H1P	SC1XP SENCLAMP® 220101N	SC2 SENCOR® 470001N
Trigger	Selectable	Sequential	Sequential
Operating Pressure	70-120 psi (4.8-8.3 bar)	80-110 psi (5.5-7.5 bar)	80-110 psi (5.5-7.5 bar)
Air Consumption (60 CPM)	2.4 scfm	3.8 scfm	3.7 scfm
Air Inlet	1/4" NPT	3/8" NPT	3/8" NPT
Weight	3.1 lbs (1.4 kg)	6.3 lbs (2.8 kg)	6.9 lbs (3.1 kg)
Height	9.5" (241 mm)	9.8" (249 mm)	9.44" (240 mm)
Length	10.25" (260 mm)	12.7" (322 mm)	12.5" (318 mm)
Width	2.5" (63.5 mm)	2.5" (63.5 mm)	2" (50.8 mm)
Main Body Material	Aluminum	Aluminum	Aluminum
Warranty	5 yrs	5 yrs	5 yrs
FASTENERS			
FASTENERS ARE LOCATED ON PAGES 25, 27			
Gauge	18	25	25
Crown	1/4"	7/16"	1"
Range	3/8"-1 1/2"	5/16"-9/16"	1/4"-1/2"
Capacity	110	120	80
Angle/Collation	Straight Glued/Taped Strip	Straight Glued/Taped Strip	Straight Glued Strip

23^{GA}
PIN

HEADLESS STRAIGHT STRIP PINS

FINE WOODWORKING, MOLDING & DECORATIVE TRIM								
Length	Finish	Head	Point	Coating	Collation	Count	Item Code	Compatible With
1/2"	Galv	Headless	Chisel	Plain	Straight Glued Strip	2600	CZ08EAAR	● ● ●
1/2"	Galv	Headless	Chisel	Plain	Straight Glued Strip	10,000	CZ08EAA	● ● ●
1/2"	Galv	Headless	Chisel	Plain	Straight Glued Strip	15,500	CZ08EAAN	● ● ●
1/2" - 1"	Galv	Headless	Chisel	Plain	Straight Glued Strip	2600	A109809R	● ● ●
5/8"	Galv	Headless	Chisel	Plain	Straight Glued Strip	2600	CZ10EAAR	● ● ●
5/8"	Galv	Headless	Chisel	Plain	Straight Glued Strip	10,000	CZ10EAA	● ● ●
5/8"	Galv	Headless	Chisel	Plain	Straight Glued Strip	15,500	CZ10EAAN	● ● ●
3/4"	Galv	Headless	Chisel	Plain	Straight Glued Strip	2600	CZ11EAAR	● ● ●
3/4"	Galv	Headless	Chisel	Plain	Straight Glued Strip	10,000	CZ11EAA	● ● ●
3/4"	Galv	Headless	Chisel	Plain	Straight Glued Strip	15,500	CZ11EAAN	● ● ●
1"	Galv	Headless	Chisel	Plain	Straight Glued Strip	2600	CZ13EAAR	● ● ●
1"	Galv	Headless	Chisel	Plain	Straight Glued Strip	10,000	CZ13EAA	● ● ●
1 1/4"	Galv	Headless	Chisel	Plain	Straight Glued Strip	2600	CZ15EAAR	● ● ●
1 1/4"	Galv	Headless	Chisel	Plain	Straight Glued Strip	10,000	CZ15EAA	● ● ●
1 3/8"	Galv	Headless	Chisel	Plain	Straight Glued Strip	2600	CZ16EAAR	● ● ●
1 3/8"	Galv	Headless	Chisel	Plain	Straight Glued Strip	10,000	CZ16EAA	● ● ●
1 1/2"	Galv	Headless	Chisel	Plain	Straight Glued Strip	2600	CZ17EAAR	●
1 1/2"	Galv	Headless	Chisel	Plain	Straight Glued Strip	10,000	CZ17EAA	●
2"	Galv	Headless	Chisel	Plain	Straight Glued Strip	2600	CZ21EAAR	●
2"	Galv	Headless	Chisel	Plain	Straight Glued Strip	10,000	CZ21EAA	●

TN1GIP
TN1L1
TN1GI

1/2" - 2"

21^{GA}
PIN

MEDIUM STRAIGHT STRIP PINS

FINISH & WOODWORKING, CABINETS, PANELING, CASING								
Length	Finish	Head	Point	Coating	Collation	Count	Item Code	Compatible With
5/8"	Galv	Medium	Chisel	Plain	Straight Glued Strip	5000	ZX10EAA	●
1"	Galv	Medium	Chisel	Plain	Straight Glued Strip	2000	ZX13EAAR	●
1"	Galv	Medium	Chisel	Plain	Straight Glued Strip	5000	ZX13EAA	●
1 3/8"	Galv	Medium	Chisel	Plain	Straight Glued Strip	2000	ZX16EAAR	●
1 3/8"	Galv	Medium	Chisel	Plain	Straight Glued Strip	5000	ZX16EAA	●
1 5/8"	Galv	Medium	Chisel	Plain	Straight Glued Strip	2000	ZX18EAAR	●
1 5/8"	Galv	Medium	Chisel	Plain	Straight Glued Strip	5000	ZX18EAA	●
2"	Galv	Medium	Chisel	Plain	Straight Glued Strip	2000	ZX21EAAR	●
2"	Galv	Medium	Chisel	Plain	Straight Glued Strip	5000	ZX21EAA	●

TN2L1
TN21L1


5/8" - 2"

STRAIGHT STRIP BRAD NAILS

CABINETS, DECORATIVE TRIM, PICTURE FRAMES & MOLDING

Length	Finish	Head	Point	Coating	Collation	Count	Item Code	Compatible With
1/2"	Galv	Medium	Chisel	Plain	Straight Glued Strip	1000	AX08EAAR	
5/8"	Galv	Medium	Chisel	Plain	Straight Glued Strip	5000	AX10EAA	● ● ● ●
5/8"-1 1/4"	Galv	Medium	Chisel	Plain	Straight Glued Strip	1200	A209809R	● ● ● ●
3/4"	Galv	Medium	Chisel	Plain	Straight Glued Strip	1000	AX11EAAR	● ● ● ●
3/4"	Galv	Medium	Chisel	Plain	Straight Glued Strip	5000	AX11EAA	● ● ● ●
1"	Galv	Medium	Chisel	Plain	Straight Glued Strip	1000	AX13EAAR	● ● ● ●
1"	Galv	Medium	Chisel	Plain	Straight Glued Strip	5000	AX13EAA	● ● ● ●
1 1/4"	Galv	Medium	Chisel	Plain	Straight Glued Strip	1000	AX15EAAR	● ● ● ●
1 1/4"	Galv	Medium	Chisel	Plain	Straight Glued Strip	5000	AX15EAA	● ● ● ●
1 1/2"	Galv	Medium	Chisel	Plain	Straight Glued Strip	1000	AX17EAAR	● ● ● ●
1 1/2"	Galv	Medium	Chisel	Plain	Straight Glued Strip	5000	AX17EAA	● ● ● ●
1 5/8"	Galv	Medium	Chisel	Plain	Straight Glued Strip	5000	AX18EAA	● ● ● ●
1 3/4"	Galv	Medium	Chisel	Plain	Straight Glued Strip	5000	AX19EAA	● ● ● ●
1-2"	Galv	Medium	Chisel	Plain	Straight Glued Strip	1200	A209909R	● ● ● ●
2"	Galv	Medium	Chisel	Plain	Straight Glued Strip	1000	AX21EAAR	● ● ● ●
2"	Galv	Medium	Chisel	Plain	Straight Glued Strip	5000	AX21EAA	● ● ● ●
2 1/8"	Galv	Medium	Chisel	Plain	Straight Glued Strip	1000	AX22EAAR	● ● ● ●
2 1/8"	Galv	Medium	Chisel	Plain	Straight Glued Strip	5000	AX22EAA	● ● ● ●

FINISHPRO® 25XP
SLP20XP
BN31MIP
F-18XP




1/2" - 2 1/8"

HEADLESS & SLIGHT HEAD BRAD NAILS

CABINETS, DECORATIVE TRIM, PICTURE FRAMES & MOLDING

Length	Finish	Head	Point	Coating	Collation	Count	Item Code	Compatible With
7/16"	Galv	Headless	Chisel	Plain	Straight Glued Strip	5000	AZ07EAA	
1/2"	Galv	Headless	Chisel	Plain	Straight Glued Strip	5000	AZ08EAA	●
3/4"	Galv	Headless	Chisel	Plain	Straight Glued Strip	5000	AZ11EAA	●
1"	Galv	Headless	Chisel	Plain	Straight Glued Strip	5000	AZ13EAA	●
5/8"	Galv	Slight	Chisel	Plain	Straight Glued Strip	5000	AY10EAA	● ● ● ●
3/4"	Galv	Slight	Chisel	Plain	Straight Glued Strip	5000	AY11EAA	● ● ● ●
1"	Galv	Slight	Chisel	Plain	Straight Glued Strip	5000	AY13EAA	● ● ● ●

FINISHPRO® 25XP
SLP20XP
LSTXP
F-18X




7/16" - 1"

5/8" - 1"

16
DA
STRAIGHT**STRAIGHT STRIP FINISH NAILS****FURNITURE & CABINETS, MOLDING & TRIM, BASEBOARD, CHAIR RAILS, WINDOW CASINGS & UPHOLSTERY TRIM PANELS**


Length	Finish	Head	Point	Coating	Collation	Count	Item Code	Compatible With
3/4"	Galv	T-head	Chisel	Plain	Straight Glued Strip	1000	M001000R	●
3/4"	Galv	T-head	Chisel	Plain	Straight Glued Strip	2000	M001000	●
1"	Galv	T-head	Chisel	Plain	Straight Glued Strip	1000	M001001R	●
1"	Galv	T-head	Chisel	Plain	Straight Glued Strip	2000*	M001001	●
1 1/4"	Galv	T-head	Chisel	Plain	Straight Glued Strip	1000	M001002R	● ●
1 1/4"	Galv	T-head	Chisel	Plain	Straight Glued Strip	2000*	M001002	● ●
1 1/2"	Galv	T-head	Chisel	Plain	Straight Glued Strip	1000	M001003R	● ●
1 1/2"	Galv	T-head	Chisel	Plain	Straight Glued Strip	2000*	M001003	● ●
1 3/4"	Galv	T-head	Chisel	Plain	Straight Glued Strip	1000	M001004R	● ●
1 3/4"	Galv	T-head	Chisel	Plain	Straight Glued Strip	2000*	M001004	● ●
2"	Galv	T-head	Chisel	Plain	Straight Glued Strip	1000	M001005R	● ●
2"	Galv	T-head	Chisel	Plain	Straight Glued Strip	2000*	M001005	● ●
2 1/4"	Galv	T-head	Chisel	Plain	Straight Glued Strip	1000	M001006R	● ●
2 1/2"	Galv	T-head	Chisel	Plain	Straight Glued Strip	2000*	M001007	● ●
2 1/2"	Galv	T-head	Chisel	Plain	Straight Glued Strip	1000	M001007R	● ●

*Plastic Tub

F-16XP
TN41PIP**15**
DA
ANGLED**ANGLED STRIP FINISH NAILS****FURNITURE & CABINETS, MOLDING & TRIM, BASEBOARD, CHAIR RAILS, WINDOW CASINGS & UPHOLSTERY TRIM PANELS**

Length	Finish	Head	Point	Coating	Collation	Count	Item Code	Compatible With
1"	Bright	Brad	Chisel	Plain	34° Angled Tape Strip	1000	DA13EPBR	●
1"	Bright	Brad	Chisel	Sencote	34° Angled Tape Strip	4000	DA13EPBN	●
1 1/4"	Bright	Brad	Chisel	Plain	34° Angled Tape Strip	1000	DA15EPBR	● ● ● ●
1 1/4"	Bright	Brad	Chisel	Sencote	34° Angled Tape Strip	4000	DA15EPBN	● ● ● ●
1 1/2"	Bright	Brad	Chisel	Plain	34° Angled Tape Strip	1000	DA17EPBR	● ● ● ●
1 1/2"	Bright	Brad	Chisel	Sencote	34° Angled Tape Strip	4000	DA17EPBN	● ● ● ●
1 3/4"	Bright	Brad	Chisel	Plain	34° Angled Tape Strip	1000	DA19EPBR	● ● ● ●
1 3/4"	Bright	Brad	Chisel	Sencote	34° Angled Tape Strip	4000	DA19EPBN	● ● ● ●
2"	Bright	Brad	Chisel	Plain	34° Angled Tape Strip	1000	DA21EPBR	● ● ● ●
2"	Bright	Brad	Chisel	Sencote	34° Angled Tape Strip	4000	DA21EPBN	● ● ● ●
2 1/4"	Bright	Brad	Chisel	Sencote	34° Angled Tape Strip	4000	DA23EPBN	● ● ● ●
2 1/2"	Bright	Brad	Chisel	Plain	34° Angled Tape Strip	1000	DA25EPBR	● ● ● ●
2 1/2"	Bright	Brad	Chisel	Sencote	34° Angled Tape Strip	3000	DA25EPB	● ● ● ●
1"	Galv	Brad	Chisel	Plain	34° Angled Tape Strip	1000	DA13EABR	● ●
1 1/4"	Galv	Brad	Chisel	Plain	34° Angled Tape Strip	1000	DA15EABR	● ● ● ●
1 1/4"	Galv	Brad	Chisel	Sencote	34° Angled Tape Strip	4000	DA15EABN	● ● ● ●
1 1/2"	Galv	Brad	Chisel	Plain	34° Angled Tape Strip	1000	DA17EABR	● ● ● ●
1 1/2"	Galv	Brad	Chisel	Sencote	34° Angled Tape Strip	4000	DA17EABN	● ● ● ●
1 3/4"	Galv	Brad	Chisel	Plain	34° Angled Tape Strip	1000	DA19EABR	● ● ● ●
1 3/4"	Galv	Brad	Chisel	Sencote	34° Angled Tape Strip	4000	DA19EABN	● ● ● ●
2"	Galv	Brad	Chisel	Plain	34° Angled Tape Strip	1000	DA21EABR	● ● ● ●
2"	Galv	Brad	Chisel	Sencote	34° Angled Tape Strip	4000	DA21EABN	● ● ● ●
2 1/2"	Galv	Brad	Chisel	Plain	34° Angled Tape Strip	1000	DA25EABR	● ● ● ●
2 1/2"	Galv	Brad	Chisel	Sencote	34° Angled Tape Strip	3000	DA25EAB	● ● ● ●
1 1/4"	Hardened*	Brad	Diamond	Plain	34° Angled Tape Strip	4000	DA15AIA	● ● ● ●
1 1/2"	Hardened*	Brad	Diamond	Plain	34° Angled Tape Strip	4000	DA17AIA	● ● ● ●
1 3/4"	Hardened*	Brad	Diamond	Plain	34° Angled Tape Strip	4000	DA19AIA	● ● ● ●
2"	Stainless 304	Brad	Chisel	Plain	34° Angled Tape Strip	1000	DA21EGBR	● ● ● ●
2 1/2"	Stainless 304	Brad	Chisel	Plain	34° Angled Tape Strip	1000	DA25EGBR	● ● ● ●


*Hardened, heat treated & galvanized for steel stud & trim applications

F-15XP
FINISHPRO 30XP
TN51PIP
FINISHPRO 42XP

19_{GA}
K**1/4" CROWN FINISH STAPLES****CABINETS, DRAWERS, SOFFITS, LATTICE, CASEBACKS**


Length	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
3/4"	Galv	Chisel	Sencote	Glued	10,000	K11BAB	●
7/8"	Galv	Chisel	Sencote	Glued	5000	K12BAB	●
1"	Galv	Chisel	Sencote	Glued	5000	K13BABN	●

SLS20XP-K


19_{GA}
R**3/16" CROWN FINISH STAPLES****CABINETS, DRAWERS, LATTICE, LAMINATED HARDWOOD FLOORING**

Length	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
5/8"	Galv	Chisel	Sencote	Glued	5000	R10BAB	●
3/4"	Galv	Chisel	Sencote	Glued	5000	R11BAB	●
1"	Galv	Chisel	Sencote	Glued	5000	R13BAB	●

SLS20XP-R


18_{GA}
L**1/4" CROWN FINISH STAPLES****CABINETS, CASEBACKS, DRAWERS, UPHOLSTERY, SOFFITS, UNDERLAYMENT, LATTICE & INSULATION SHEATHING**

Length	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
3/4"	Bright	Chisel	Sencote	Glued	5000	L11BRB	● ● ● ● ● ● ● ●
1"	Bright	Chisel	Sencote	Glued	5000	L13BRBN	● ● ● ● ● ● ● ●
1 1/8"	Bright	Chisel	Sencote	Glued	5000	L14BRB	● ● ● ● ● ● ● ●
1 1/4"	Bright	Chisel	Sencote	Glued	5000	L15BRB	● ● ● ● ● ● ● ●
3/8"	Galv	Chisel	Sencote	Glued	10,000	L06BAB	● ● ● ● ● ● ● ●
7/16"	Galv	Chisel	Sencote	Glued	24,000	L07BAP	● ● ● ● ● ● ● ●
1/2"	Galv	Chisel	Sencote	Glued	10,000	L08BAB	● ● ● ● ● ● ● ●
1/2" - 1 1/2"	Galv	Chisel	Plain	Glued	1000	A809909R	● ● ● ● ● ● ● ●
5/8"	Galv	Chisel	Plain	Glued	1000	L10BABR	● ● ● ● ● ● ● ●
5/8"	Galv	Chisel	Sencote	Glued	5000	L10BABN	● ● ● ● ● ● ● ●
5/8"	Galv	Cross Cut	Sencote	Glued	5000	L10HABN	● ● ● ● ● ● ● ●
3/4"	Galv	Chisel	Plain	Glued	1000	L11BABR	● ● ● ● ● ● ● ●
3/4"	Galv	Chisel	Sencote	Glued	5000	L11BAB	● ● ● ● ● ● ● ●
3/4"	Galv	Cross Cut	Sencote	Glued	5000	L11HBB	● ● ● ● ● ● ● ●
3/4"	Galv	Cross Cut	Sencote	Glued	5000	L11HAB	● ● ● ● ● ● ● ●
7/8"	Galv	Chisel	Sencote	Glued	5000	L12BAB	● ● ● ● ● ● ● ●
1"	Galv	Chisel	Plain	Glued	1000	L13BABR	● ● ● ● ● ● ● ●
1"	Galv	Chisel	Sencote	Glued	5000	L13BABN	● ● ● ● ● ● ● ●
1 1/8"	Galv	Chisel	Sencote	Glued	5000	L14BAB	● ● ● ● ● ● ● ●
1 1/4"	Galv	Chisel	Plain	Glued	1000	L15BABR	● ● ● ● ● ● ● ●
1 1/4"	Galv	Chisel	Sencote	Glued	5000	L15BAB	● ● ● ● ● ● ● ●
1 1/2"	Galv	Chisel	Plain	Glued	1000	L17BABR	● ● ● ● ● ● ● ●
1 1/2"	Galv	Chisel	Sencote	Glued	5000	L17BAB	● ● ● ● ● ● ● ●
3/4"	Stainless Steel 304	Chisel	Plain	Glued	1000	L11BGBR	● ● ● ● ● ● ● ●
3/4"	Stainless Steel 304	Chisel	Plain	Glued	5000	L11BGA	● ● ● ● ● ● ● ●
1 1/8"	Stainless Steel 304	Chisel	Plain	Glued	1000	L14BGBR	● ● ● ● ● ● ● ●
1 1/8"	Stainless Steel 304	Chisel	Plain	Glued	5000	L14BGA	● ● ● ● ● ● ● ●

F-LXP
SLS20XP-L
SLS25XP-L
SKSXP-L
SLS150MG
LS6HIP¹Stainless 304 high tensile, ²Galvanized high tensile

18
M**3/8" CROWN FINISH STAPLES****CABINETS, CASEBACKS, DRAWERS, UPHOLSTERY, SOFFITS, UNDERLAYMENT, LATTICE & SHEATHING**


Length	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
5/8"	Bright	Chisel	Sencote	Glued	5000	M10BRBN	● ●
3/4"	Bright	Chisel	Sencote	Glued	5000	M11BRBN	● ● ●
1"	Bright	Chisel	Sencote	Glued	5000	M13BRB	● ● ●
3/8"	Galv	Chisel	Sencote	Glued	10,000	M06BABN	● ●
1/2"	Galv	Chisel	Sencote	Glued	10,000	M08BAB	● ●
5/8"	Galv	Chisel	Sencote	Glued	5000	M10BABN	● ●
3/4"	Galv	Chisel	Sencote	Glued	5000	M11BABN	● ● ●
7/8"	Galv	Chisel	Sencote	Glued	5000	M12BAB	● ● ●
1"	Galv	Chisel	Sencote	Glued	5000	M13BAB	● ● ●
1 1/4"	Galv	Chisel	Sencote	Glued	10,000	M15BAB	● ● ●
1 1/2"	Galv	Chisel	Sencote	Glued	10,000	M17BAB	● ● ●

SKSP-M
SLS25XP-M
SLS20XP-M**16**
N**7/16" CROWN HEAVY WIRE STAPLES****CABINETS, CASEBACKS, DRAWERS, UPHOLSTERY, SOFFITS, UNDERLAYMENT, LATTICE & SHEATHING**

Length	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
1 1/8"	Bright	Chisel	Sencote	Taped	10,000	N14BRB	●
1 1/4"	Bright	Chisel	Sencote	Taped	10,000	N15BRB	●
1 3/8"	Bright	Chisel	Sencote	Taped	10,000	N16BRB	●
1 1/2"	Bright	Chisel	Sencote	Taped	10,000	N17BRB	●
1 5/8"	Bright	Chisel	Sencote	Taped	10,000	N18BRB	
1 3/4"	Bright	Chisel	Sencote	Taped	10,000	N19BRB	
2"	Bright	Chisel	Sencote	Taped	10,000	N21BRB	
1/2"	Galv	Chisel	Sencote	Glued	5000	N08BABN	
3/4"	Galv	Chisel	Sencote	Glued	5000	N11BAB	●
7/8"	Galv	Chisel	Sencote	Glued	5000	N12BABN	●
7/8"	Galv	Diverg	Sencote	Glued	5000	N12FABN	●
1"	Galv	Chisel	Sencote	Glued	5000	N13BAB	●
1"	Galv	Diverg	Sencote	Glued	5000	N13FAB	●
1 1/8"	Galv	Chisel	Sencote	Taped	10,000	N14BAB	●
1 1/4"	Galv	Chisel	Sencote	Taped	10,000	N15BAB	●
1 3/8"	Galv	Chisel	Sencote	Taped	10,000	N16BAB	●
1 1/2"	Galv	Chisel	Sencote	Taped	10,000	N17BAB	●
1 5/8"	Galv	Chisel	Sencote	Taped	10,000	N18BAB	
1 3/4"	Galv	Chisel	Sencote	Taped	10,000	N19BAB	
2"	Galv	Chisel	Sencote	Taped	10,000	N21BAB	
1/2"	Galv*	Chisel	Sencote	Glued	5000	N08BBBN	
1/2"	Galv*	Diverg	Sencote	Glued	5000	N08FBFB	
5/8"	Galv*	Chisel	Sencote	Glued	5000	N10BAB	
3/4"	Galv*	Diverg	Sencote	Glued	5000	N11FBFB	●
1 1/2"	Stainless 304	Chisel	Sencote	Glued	3000	N17BGB	●
1 3/4"	Stainless 304	Chisel	Sencote	Glued	3000	N19BGBN	
2"	Stainless 304	Chisel	Sencote	Glued	3000	N21BGBN	

*Galvanized high-tensile steel

SKSP-N




SENCLAMP® 7/16" CROWN JOINT FASTENER

BUTT & MITER JOINTS

Length	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
5/16"	Bright	Chisel	Plain	Glued	3000	Y05BFA	●
7/16"	Bright	Chisel	Plain	Glued	3000	Y07BFA	●
9/16"	Bright	Chisel	Plain	Glued	3000	Y09BFAN	●

SC1XP




SENCOR® 1" CROWN CORRUGATED FASTENER

BUTT & MITER JOINTS

Length	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
1/4"	Bright	Sharp Chisel	Plain	Glued	8000	X04NRA	●
3/8"	Bright	Sharp Chisel	Plain	Glued	5000	X06NRA	●
1/2"	Bright	Sharp Chisel	Plain	Glued	4000	X08NRA	●

SC2



FRAMING, SHEATHING & SUBFLOORS

NAILING THE RIGHT BALANCE OF SIZE, WEIGHT AND POWER

We offer a large selection of pneumatic nailers for a wide variety of applications.

APPLICATIONS

Framing, sheathing, truss building, installing subflooring, decking or fencing, assembling boxes or making pallets.

KEY FEATURES

- Low profile designs allow for easy access between studs and joists
- Highly efficient internal design for increased durability
- Dry fire lock out prevents dry firing and signals when it's time to reload
- Claw-like safety for precise toe-nailing

Experience FUSION® award-winning cordless convenience in all-day, everyday framing tools.

APPLICATIONS

Framing, sheathing, truss building, installing subflooring, decking or fencing, assembling boxes or making pallets.

KEY FEATURES

- FUSION® cordless air-power technology
- No hose, compressor or fuel cell
- Pneumatic-like response with no ramp up time
- Jam Reduction Intelligence for fewer nail jams
- Dry fire lockout
- Aggressive toenail safety



FN91T1

F-35XP

3½" 30° CORDLESS PAPER TAPE FRAMING NAILER



30°

TOOL OVERVIEW

- Drives 30° paper tape strip nails 2" to 3½" in length
- Fusion cordless air-power technology
- No hose, compressor or fuel cell needed
- Pneumatic-like response with no ramp up time
- Jam reduction intelligence for fewer nail jams

APPLICATIONS

Framing, panelized construction, truss building, subflooring, sheathing, decking, siding, fencing, pallets & crate assembly

F-35FRHXP

3½" 21° CORDLESS PLASTIC COLLATED FRAMING NAILER



21°

TOOL OVERVIEW

- Drives 21° plastic collated framing nails 2" to 3½" in length
- Fusion cordless air-power technology
- No hose, compressor or fuel cell needed
- Pneumatic-like response with no ramp up time
- Jam reduction intelligence for fewer nail jams

APPLICATIONS

Framing, panelized construction, truss building, subflooring, sheathing, decking, siding, fencing, pallets & crate assembly



F-35XP

EXTENDED LENGTH MAGAZINES - SOLD SEPARATELY

FOR	TYPE	ITEM #
F-35XP	2 Nail Strip Magazine	GA0767
F-35FRHXP	2 Nail Strip Magazine	GA0778

TOOL SPECIFICATIONS

MODEL NAME ITEM #	F-35XP 10G0002N	F-35FRHXP 10H0002N
Trigger	Selectable	Selectable
Technology	FUSION®	FUSION®
Power Type	Cordless	Cordless
Weight	11.37 lbs (5.16 kg)	11.38 lbs (5.17 kg)
Height	14.4" (366 mm)	14.4" (366 mm)
Length	14.0" (356 mm)	14.6" (371 mm)
Width	5.5" (140 mm)	4.7" (119 mm)
Charge Time	50% in less than 20 minutes, 100% in less than 60 minutes	50% in less than 20 minutes, 100% in less than 60 minutes
Warranty	5 yrs	5 yrs
FASTENERS	FASTENERS ARE LOCATED ON PAGES 38-41	
Range	2"-3½"	2"-3½"
Diameter	.113"-.148"	.113"-.131"
Capacity	60	35
Angle/Collation	30-34° Angled Paper Tape Strip	20-21° Angled Plastic Strip

FN91T1
3½" 30° PAPER TAPE FRAMING NAILER



30°



TOOL OVERVIEW

- Drives 30° paper tape framing nails 2" to 3½" in length
- Best in class tool power & durability
- Well-balanced ergonomic design
- In-line magazine for optimal line of sight
- Aggressive toenail safety
- Tool-free depth of drive

APPLICATIONS

Framing, truss building, subflooring, sheathing, decking, siding, fencing, pallet & crate assembly

FN81T1
3½" 21° FULL ROUND HEAD FRAMING NAILER



21°



TOOL OVERVIEW

- Drives 21° plastic collated framing nails 2" to 3½" in length
- Best in class tool power & durability
- Well-balanced ergonomic design
- In-line magazine for optimal line of sight
- Aggressive toenail safety
- Tool-free depth of drive

APPLICATIONS

Framing, truss building, subflooring, sheathing, decking, siding, fencing, pallet & crate assembly



TOOL SPECIFICATIONS

MODEL NAME ITEM #	FN91T1	FN81T1
Trigger	Sequential	Sequential
Operating Pressure	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)
Air Consumption (60 CPM)	6.7 scfm	6.7 scfm
Air Inlet	¾" NPT	¾" NPT
Weight	8.39 lbs (3.8 kg)	8.75 lbs (3.9 kgs)
Height	14.13" (358 mm)	14.13" (358 mm)
Length	17.25" (438 mm)	20.75" (527 mm)
Width	4.88" (123 mm)	4.88" (123 mm)
Main Body Material	Aluminum	Aluminum
Warranty	5 yrs	5 yrs
FASTENERS	FASTENERS ARE LOCATED ON PAGES 38-41	
Range	2" - 3½"	2" - 3½"
Diameter	.113"-.135"	.113"-.148"
Capacity	80	70
Angle/Collation	30-34° Angled Paper Tape Strip	20-21° Angled Plastic Strip

FRAMEPRO®325XP
3¼" 30° PAPER TAPE FRAMING NAILER



30°

TOOL OVERVIEW

- Drives 30° paper tape strip nails 2" to 3¼" in length
- Low profile design fits easily between studs & joists
- Effective internal design uses less air which means less wear & tear on the compressor
- Tool-free depth of drive adjustment

APPLICATIONS

Framing, sheathing, subflooring, crate, pallet & truss assembly

FRAMEPRO®751XP
3½" 30° PAPER TAPE FRAMING NAILER



30°

TOOL OVERVIEW

- Drives 30° paper taped framing nails 2" to 3½" in length
- Tool-free depth of drive adjustment
- Aggressive claw-like safety for accurate & precise toenailing
- In-line magazine for improved line of sight
- Dry fire lockout
- Quick & easy rear two-step loading

APPLICATIONS

Framing, truss building, subflooring, sheathing, decking, siding, fencing, pallet & crate assembly

FRAMEPRO®701XP
3½" 30° PAPER TAPE FRAMING NAILER



30°

TOOL OVERVIEW

- Drives 30° paper taped framing nails 2" to 3½" in length
- Tool-free depth of drive adjustment
- Aggressive claw-like safety for accurate & precise toenailing
- In-line magazine for improved line of sight
- Dry fire lockout
- Quick & easy rear two-step loading

APPLICATIONS

Framing, truss building, subflooring, sheathing, decking, siding, fencing, pallet & crate assembly

MAGAZINE RETROFIT KITS - SOLD SEPARATELY

FOR	TYPE	ITEM #
FramePro®701XP	2 Nail Strip Magazine	YJ0055
FramePro®701XP	Double Length Magazine	YJ0043
FramePro®751XP	4" Nail Feed System	YJ0042

TOOL SPECIFICATIONS

MODEL NAME ITEM #	FRAMEPRO®325XP 4Z0101N	FRAMEPRO®701XP 2H0133N	FRAMEPRO®751XP 2J0103N
Trigger	Selectable	Sequential	Sequential
Operating Pressure	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)
Air Consumption (60 CPM)	5.2 scfm	10 scfm	11 scfm
Air Inlet	⅜" NPT	⅜" NPT	⅜" NPT
Weight	7.9 lbs (3.58 kg)	8 lbs (3.62 kg)	8.4 lbs (3.8 kg)
Height	11.9" (302 mm)	13.25" (337 mm)	14.25" (362 mm)
Length	17.3" (440 mm)	15.13" (384 mm)	15.13" (384 mm)
Width	4.5" (114 mm)	4.17" (106 mm)	4.17" (106 mm)
Main Body Material	Aluminum	Aluminum	Aluminum
Warranty	5 yrs	5 yrs	5 yrs
FASTENERS	FASTENERS ARE LOCATED ON PAGES 38-40		
Range	2"-3¼"	2"-3½"	2"-3½"
Diameter	.113"-.148"	.113"-.148"	.113"-.148"
Capacity	83	70	70
Angle/Collation	30-34° Angled Paper Tape Strip	30-34° Angled Paper Tape Strip	30-34° Angled Paper Tape Strip

FRAMEPRO®325FRHXP
3¼" 21° FULL ROUND HEAD FRAMING NAILER



21°

TOOL OVERVIEW

- Drives 21° plastic collated framing nails 2" to 3¼" in length
- Low profile design fits easily between studs & joists
- Effective internal design uses less air which means less wear & tear on the compressor
- Tool-free adjustable depth of drive

APPLICATIONS

Framing, truss building, subflooring, sheathing, decking, siding, fencing, pallet & crate assembly

FRAMEPRO®752XP
3½" 21° FULL ROUND HEAD FRAMING NAILER



21°

TOOL OVERVIEW

- Drives 16 penny common nails & 21° plastic collated framing nails 2" to 3½" in length
- Tool-free depth of drive adjustment
- Aggressive claw-like safety for accurate & precise toenailing
- In-line magazine for improved line of sight
- Dry fire lockout

APPLICATIONS

Framing, sheathing, subflooring, crate, pallet & truss assembly

TOOL SPECIFICATIONS

MODEL NAME ITEM #	FRAMEPRO®325FRHXP 4H0101N	FRAMEPRO®702XP 2K0103N	FRAMEPRO®752XP 2F0103N
Trigger	Selectable	Sequential	Sequential
Operating Pressure	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)
Air Consumption (60 CPM)	5.2 scfm	10 scfm	11 scfm
Air Inlet	¾" NPT	¾" NPT	¾" NPT
Weight	7.9 lbs (3.58 kg)	8.4 lbs (3.8 kg)	8.7 lbs (3.97 kg)
Height	11.9" (302 mm)	13.25" (337 mm)	14.25" (362 mm)
Length	17.3" (440 mm)	20" (508 mm)	20" (508 mm)
Width	4.5" (114 mm)	4.17" (106 mm)	4.17" (106 mm)
Main Body Material	Aluminum	Aluminum	Aluminum
Warranty	5 yrs	5 yrs	5 yrs
FASTENERS	FASTENERS ARE LOCATED ON PAGE 41		
Range	2"-3¼"	2"-3½"	2"-3½"
Diameter	.113"-.148"	.113"-.148"	.120"-.162"
Capacity	64	60	60
Angle/Collation	20-21° Angled Plastic Strip	20-21° Angled Plastic Strip	20-21° Angled Plastic Strip

FRAMEPRO®702XP
3½" 21° FULL ROUND HEAD FRAMING NAILER



21°

TOOL OVERVIEW

- Drives 21° plastic collated framing nails 2" to 3½" in length
- Tool-free depth of drive adjustment
- Aggressive claw-like safety for accurate & precise toenailing
- In-line magazine for improved line of sight
- Dry fire lockout
- Quick & easy rear two-step loading

APPLICATIONS

Framing, truss building, subflooring, sheathing, decking, wood to concrete block, siding, fencing, pallet & crate assembly



FRAMEPRO®325FRHXP

SCN60XP
2¾" 15° COIL NAILER



15°
COIL

TOOL OVERVIEW

- Drives 15° flat wire welded coil nails 2" to 2¾" in length
- High capacity magazine holds up to 275 fasteners
- Tool-free depth adjustment for consistent flush or countersunk drives
- Clear magazine door makes it easy to see when you need to reload

APPLICATIONS

Framing, sheathing, decking, subflooring, crate, pallet & box assembly

PC1195
3½" BULK NAILER



TOOL OVERVIEW

- Drives nails 2" to 3½" in length
- Magnetic tip keeps the nail in place for safe, accurate placement
- Balanced 1 lb lightweight aluminum body

APPLICATIONS

Installing metal framing hardware, anchors & straps

SCN65XP
3½" 15° COIL NAILER



15°
COIL

TOOL OVERVIEW

- Drives 15° flat wire welded coil nails 2" to 3½" in length
- Highest power-to-weight ratio in its class
- High capacity magazine holds up to 275 fasteners
- NOTE:
Item # 540101N = Flat Safety
Item # 540104N = Toenail Safety

APPLICATIONS

Sheathing, decking, subflooring, exterior decks, pallet construction, pallet repair, crate & box assembly

A20
7" BULK NAILER



TOOL OVERVIEW

- Drives nails 2" to 7" in length (5d to 70d)
- Balanced 2.4 lbs lightweight aluminum body
- Soft rubber palm pad for comfortable grip
- Magnetic tip keeps the nail in place

APPLICATIONS

Installing metal framing hardware, anchors & straps

TOOL SPECIFICATIONS

MODEL NAME ITEM #	SCN60XP 520101N	SCN65XP 540101N, 540104N	PC1195	A20 PC0781
Trigger	Contact	Contact	—	—
Operating Pressure	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)	60-110 psi (4-7.6 bar)	50-125 psi (3.5-8.4 bar)
Air Consumption (60 CPM)	8.29 scfm	9.54 scfm	2-4 scfm	2-4 scfm
Air Inlet	¾" NPT	¾" NPT	¼" NPT	¾" NPT
Weight	7.5 lbs (3.4 kg)	8 lbs (3.6 kg)	1 lb (.45 kg)	2.4 lbs (1.1 kg)
Height	12.38" (314 mm)	14.1" (359 mm)	4" (101 mm)	5.8" (122 mm)
Length	12.88" (327 mm)	12.88" (327 mm)	2.75" (70 mm)	4" (101 mm)
Width	Width 5.38" (137 mm)	5.38" (137 mm)	2" (55.6 mm)	3.25" (83 mm)
Main Body Material	Aluminum	Aluminum	Aluminum	Aluminum
Warranty	5 yrs	5 yrs	1 yr	1 yr
FASTENERS	FASTENERS ARE LOCATED ON PAGES 42-43			
Range	2"-2¾"	2"-3½"	Bulk nails from 2"-3½"	Bulk nails from 2"-3½" up to 7" with optional guide tips
Diameter	.099"-.113"	.099"-.131"	—	.113"-.148"
Capacity	250-275	225-275	1	1
Angle/Collation	15° Flat Wire Welded Coil	15° Flat Wire Welded Coil	—	—

JN91H1
1½" METAL CONNECTOR NAILER



TOOL OVERVIEW

- Drives 34° paper tape metal connector nails 1½" in length
- Best-in-class power, designed to consistently drive through engineered lumber
- Single strip, allows for increased maneuverability in tight spaces
- Innovative nosepiece design
- Dry fire lockout
- Rugged, rotatable belt hook

APPLICATIONS

Joist hangers, anchors, straps, metal framing

JN91P1
2½" METAL CONNECTOR NAILER



TOOL OVERVIEW

- Drives 34° paper tape metal connector nails 1½" to 2½" in length
- Best-in-class power, designed to consistently drive through engineered lumber
- Single strip, allows for increased maneuverability in tight spaces
- Innovative nosepiece design
- Tool-free depth of drive

APPLICATIONS

Joist hangers, anchors, straps, metal framing

JN91H2
1½" METAL CONNECTOR NAILER WITH EXTENDED MAGAZINE



TOOL OVERVIEW

- Drives 34° paper tape metal connector nails 1½" in length
- Best-in-class power, designed to consistently drive through engineered lumber
- Double length magazine, provides less downtime & higher production rates
- Innovative nosepiece design
- Dry fire lockout
- Rugged, rotatable belt hook

APPLICATIONS

Joist hangers, anchors, straps, metal framing

JN91P2
2½" METAL CONNECTOR NAILER WITH EXTENDED MAGAZINE



TOOL OVERVIEW

- Drives 34° paper tape metal connector nails 1½" to 2½" in length
- Best-in-class power, designed to consistently drive through engineered lumber
- Double length magazine, provides less downtime & higher production rates
- Innovative nosepiece design
- Tool-free depth of drive

APPLICATIONS

Joist hangers, anchors, straps, metal framing

TOOL SPECIFICATIONS

MODEL NAME ITEM #	JN91H1	JN91H2	JN91P1	JN91P2
Trigger	Sequential	Sequential	Sequential	Sequential
Operating Pressure	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8 - 8.3 bar)	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8 - 8.3 bar)
Air Consumption (60 CPM)	4.4 scfm	4.4 scfm	6.4 scfm	6.4 scfm
Air Inlet	¼" NPT	¼" NPT	¼" NPT	¼" NPT
Weight	5.48 lbs (2.48 kg)	5.8 lbs (2.63 kg)	7.53 lbs (3.41 kg)	7.92 lbs (3.59 kg)
Height	12.5" (317 mm)	12.5" (317 mm)	14.38" (365 mm)	14.38" (365 mm)
Length	11.13" (282 mm)	17.86" (453 mm)	14" (355 mm)	19" (482 mm)
Width	4.38" (111 mm)	4.88" (123 mm)	5.25" (133 mm)	6.13" (155 mm)
Main Body Material	Magnesium	Magnesium	Magnesium	Magnesium
Warranty	5 yrs	5 yrs	5 yrs	5 yrs
FASTENERS	FASTENERS ARE LOCATED ON PAGE 44			
Range	1½"	1½"	1½"-2½"	1½"-2½"
Diameter	.131"-.148"	.131"-.148"	.131"-.162"	.131"-.162"
Capacity	30	55	35	55
Angle/Collation	34° Paper Tape Strip	34° Paper Tape Strip	34° Paper Tape Strip	34° Paper Tape Strip

SCP40XP

1½" PNEUMATIC CONCRETE & STEEL PINNER



TOOL OVERVIEW

- Drives concrete & steel pins ½" to 1½" in length
- Works with conventional air compressors, hoses & fittings
- 10 times faster than powder-actuated systems
- Narrow nose for precise nail placement
- Cap exhaust directs exhaust downward away from the operator

APPLICATIONS

Drywall track fastening, wood furring, hat channel, ceiling grid to concrete, concrete block & steel

MAGNETIC WASHER NOSEPIECE ATTACHMENT FOR PLASTER, STUCCO & BUILDING WRAP - SOLD SEPARATELY

FOR	RANGE	ITEM #
SCP40XP	1¼"	NPC035



GALVANIZED METAL WASHER FOR .109" DIAMETER CONCRETE PINS - SOLD SEPARATELY

FOR	DIAMETER/BOX COUNT	ITEM #
SCP40XP	1¼"/1000	SWM125B



PS15XP

16 GA. 1" WIDE CROWN, 1½" CONSTRUCTION STAPLER



TOOL OVERVIEW

- Drives 16 GA. 1" crown staples ¾" to 1½" in length
- Quickclear latch to easily clear jams or misfeeds
- Drive track eliminates unwanted movement of staple, enhancing overall drive performance
- Robust firing valve makes the tool faster, more powerful & easier to maintain

APPLICATIONS

Asphalt & fiberglass shingles, roofing felt, wire lathe, foam insulation board

PS20XP

16 GA. 1" WIDE CROWN, 2" CONSTRUCTION STAPLER



TOOL OVERVIEW

- Drives 16 GA. 1" crown staples ¾" to 2" in length
- Quick clear latch to easily clear jams or misfeeds
- Tool free adjustable depth of drive
- Drive track eliminates unwanted movement of staple, enhancing overall drive performance
- Adjustable belt hook

APPLICATIONS

Wire lathe, sheathing, foam insulation board, corrugated cart to skid

TOOL SPECIFICATIONS

MODEL NAME ITEM #	SCP40XP 7J0009N	PS15XP 9T0001N	PS20XP 9W0001N
Trigger	Sequential	Contact	Contact
Operating Pressure	80-120 psi (5.5-8.3 bar)	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)
Air Consumption (60 CPM)	5.2 scfm	3.18 scfm	3.45 scfm
Air Inlet	¾" NPT	¾" NPT	¾" NPT
Weight	7.1 lbs (3.2 kg)	5.5 lbs (2.5 kg)	5.5 lbs (2.5 kg)
Height	12.22" (310 mm)	9" (229 mm)	10" (254 mm)
Length	18.2" (462 mm)	15.25" (387 mm)	15.25" (387 mm)
Width	4.5" (114.4 mm)	4" (105 mm)	3.5" (89 mm)
Main Body Material	Aluminum	Aluminum	Aluminum
Warranty	5 yrs	5 yrs	5 yrs
FASTENERS			
FASTENERS ARE LOCATED ON PAGES 43-44			
Diameter/Crown	.109"/.118" Diameters	1" Crown	1" Crown
Range	½"-1½"	¾"-1½"	¾"-2"
Capacity	42	160	160
Angle/Collation	Straight Plastic Collated Strip	Taped & taped glued	Straight Glued/Taped Strip

NS20XP
16 GA. 7/16" CROWN, 2" CONSTRUCTION STAPLER



16
GA
N

TOOL OVERVIEW

- Drives 16 & 17GA. 7/16" crown staples 1" to 2" in length
- 15% more powerful than all other construction staplers in its class
- 14 staple per second multidirectional stitching
- Can be used for vinyl siding installation (item #HC0788 required, sold separately)

APPLICATIONS

Sheathing, furniture framing, crate & box assembly, subflooring, pallets, roof decking, fascia, cedar shingles

SNS41
16 GA. 7/16" CROWN, 2" CONSTRUCTION STAPLER



16
GA
N

TOOL OVERVIEW

- Drives 16 & 17 GA. 7/16" crown staples 1" to 2" in length
- 14 staple per second multidirectional stitching
- Quick clear latch to easily clear jams or misfeeds
- Adjustable depth of drive for precise flush or countersunk drives

APPLICATIONS

Sheathing, subflooring, crate & box assembly, furring, fascia, soffits, ridge beam assembly

TOOL SPECIFICATIONS

MODEL NAME ITEM #	NS20XP 9X0001N	NS20BXP 9Y0001N	SNS41 3L0003N
Trigger	Contact	Contact	Contact
Operating Pressure	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)	80-120 psi (5.5-8.3 bar)
Air Consumption (60 CPM)	3.5 scfm	3.98 scfm	5.4 scfm
Air Inlet	3/8" NPT	3/8" NPT	3/8" NPT
Weight	5.1 lbs (2.3 kg)	5.8 lbs (2.6 kg)	4.6 lbs (2.1 kg)
Height	11" (279 mm)	11" (279 mm)	10.75" (273 mm)
Length	15" (381 mm)	15" (381 mm)	15" (381 mm)
Width	3.5" (89 mm)	4" (102 mm)	3.4" (86 mm)
Main Body Material	Aluminum	Aluminum	Aluminum
Warranty	5 yrs	5 yrs	5 yrs
FASTENERS	FASTENERS ARE LOCATED ON PAGE 45		
Gauge	16	16	16
Crown	7/16"	7/16"	7/16"
Range	1"-2"	1"-2"	1"-2"
Capacity	160	160	160
Angle/Collation	Straight Glued/Taped Strip	Straight Glued/Taped Strip	Straight Glued/Taped Strip

NS20BXP
16 GA. 7/16" CROWN, 2" CONSTRUCTION STAPLER



16
GA
N

TOOL OVERVIEW

- Drives 16 & 17 GA. 7/16" crown staples 1" to 2" in length
- 20% more powerful than the standard NS20XP for the most demanding applications
- 14 staple per second multidirectional stitching
- Can be used for vinyl siding installation (item #HC0788 required, sold separately)

APPLICATIONS

Sheathing, furniture framing, crate & box assembly, subflooring, pallets, roof decking, fascia, cedar shingles



SNS45XP

16 GA. 7/16" CROWN, 2" CONSTRUCTION STAPLER



16
GA
N

TOOL OVERVIEW

- Drives 16 GA. 7/16" crown staples 1" to 2" in length
- Fast-up to 15 staples per second
- Quick clear latch to easily clear jams or misfeeds
- Tool-free depth adjustment for consistent flush or countersunk drives

APPLICATIONS

On-site & manufactured housing, roof & floor decking, sheathing, subflooring, fascia & soffits, lathing, fencing & cedar shingles, furniture frames, boxes, crates, pallets & pallet repair

SNS50XP

16 GA. 7/16" CROWN, 2" CONSTRUCTION STAPLER



16
GA
N

TOOL OVERVIEW

- Drives 16 GA. 7/16" crown staples 1 1/4" to 2" in length
- Fast-up to 15 staples per second
- Quick clear latch to easily clear jams or misfeeds
- Tool-free depth adjustment for consistent flush or countersunk drives

APPLICATIONS

Framing, sheathing, subflooring, crate & box assembly, pallets & pallet repair

SQS55XP

15 GA. 7/16" CROWN, 2 1/2" CONSTRUCTION STAPLER



15
GA
Q

TOOL OVERVIEW

- Drives 15 GA. 7/16" crown staples 1 1/4" to 2 1/2" in length
- 15 staple per second multidirectional stitching
- Quick clear latch to easily clear jams or misfeeds

APPLICATIONS

Framing, sheathing, subflooring, crate & box assembly, pallet & pallet repair



TOOL SPECIFICATIONS

MODEL NAME ITEM #	SNS45XP 580101N	SNS50XP 750101N	SQS55XP 660101N
Trigger	Contact	Contact	Contact
Operating Pressure	80-120 psi (5.5 - 8.3 bar)	80-120 psi (5.5 - 8.3 bar)	80-120 psi (5.5-8.3 bar)
Air Consumption (60 CPM)	5.52 scfm	6.54 scfm	6.54 scfm
Air Inlet	3/8" NPT	3/8" NPT	3/8" NPT
Weight	5.1 lbs (2.3 kg)	5.9 lbs (2.7 kg)	5.9 lbs (2.7 kg)
Height	11" (279 mm)	12" (305 mm)	12" (305 mm)
Length	14" (356 mm)	14.38" (365 mm)	14.38" (365 mm)
Width	3.5" (89 mm)	3.6" (92 mm)	3.6" (92 mm)
Main Body Material	Aluminum	Aluminum	Aluminum
Warranty	5 yrs	5 yrs	5 yrs
FASTENERS	FASTENERS ARE LOCATED ON PAGE 45		
Gauge	16	16	15
Crown	7/16"	7/16"	7/16"
Range	1"-2"	1 1/4"-2"	1 1/4"-2 1/2"
Capacity	160	160	130
Angle/Collation	Straight Glued/Taped Strip	Straight Glued/Taped Strip	Straight Glued/Taped Strip




PROHEAD® SMOOTH SHANK PAPER TAPE COLLATED NAILS

FRAMING, SHEATHING, SUBFLOOR, DECKS, TRUSSES & PALLETS

Length	Diameter	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
2"	.113"	Bright	Diamond	Sencote	30° Paper Tape Strip	2500	GC21APBX	● ● ● ● ● ●
2 3⁄8"	.113"	Bright	Diamond	Sencote	30° Paper Tape Strip	2500	GC24APBX	● ● ● ● ● ●
2 1⁄2"	.113"	Bright	Diamond	Sencote	30° Paper Tape Strip	2500	GC25APBX	● ● ● ● ● ●
3"	.120"	Bright	Diamond	Sencote	30° Paper Tape Strip	1000	H527APBXNR	● ● ● ● ● ●
3"	.120"	Bright	Diamond	Sencote	30° Paper Tape Strip	2500	HC27APBX	● ● ● ● ● ●
3 1⁄4"	.120"	Bright	Diamond	Sencote	30° Paper Tape Strip	2500	HC28APBX	● ● ● ● ● ●
2 1⁄2"	.131"	Bright	Diamond	Sencote	30° Paper Tape Strip	2000	KC25APBXN	● ● ● ● ● ●
3"	.131"	Bright	Diamond	Sencote	30° Paper Tape Strip	1000	K527APBXNR	● ● ● ● ● ●
3"	.131"	Bright	Diamond	Sencote	30° Paper Tape Strip	2500	KC27APBX	● ● ● ● ● ●
3 1⁄4"	.131"	Bright	Diamond	Sencote	30° Paper Tape Strip	1000	K528APBXNR	● ● ● ● ● ●
3 1⁄4"	.131"	Bright	Diamond	Sencote	30° Paper Tape Strip	2500	KC28APBX	● ● ● ● ● ●
3 1⁄2"	.131"	Bright	Diamond	Sencote	30° Paper Tape Strip	2500	KC29APBX	● ● ● ● ● ●
4"	.131"	Bright	Diamond	Sencote	30° Paper Tape Strip	2500	KC31APBX*	●
3 1⁄2"	.135"	Bright	Diamond	Sencote	30° Paper Tape Strip	2500	LC29APBX	● ● ● ● ● ●
2 3⁄8"	.113"	Hot Dip	Diamond	Sencote	30° Paper Tape Strip	2500	GC24ASBX	● ● ● ● ● ●
3"	.120"	Hot Dip	Diamond	Sencote	30° Paper Tape Strip	2500	HC27ASBX	● ● ● ● ● ●
3"	.131"	Hot Dip	Diamond	Sencote	30° Paper Tape Strip	1000	K527ASBXNR	● ● ● ● ● ●
3"	.131"	Hot Dip	Diamond	Sencote	30° Paper Tape Strip	2500	KC27ASBX	● ● ● ● ● ●
3 1⁄4"	.131"	Hot Dip	Diamond	Sencote	30° Paper Tape Strip	1000	K528ASBXNR	● ● ● ● ● ●
3 1⁄4"	.131"	Hot Dip	Diamond	Sencote	30° Paper Tape Strip	2500	KC28ASBX	● ● ● ● ● ●
3 1⁄2"	.131"	Hot Dip	Diamond	Sencote	30° Paper Tape Strip	2500	KC29ASBX	● ● ● ● ● ●

*FramePro®751XP can drive 4" nails when fitted with the YJ0042 kit

FRAMEPRO 751XP & 751XP-SL
FRAMEPRO 701XP
FRAMEPRO 325XP
FN91T1
F-35XP

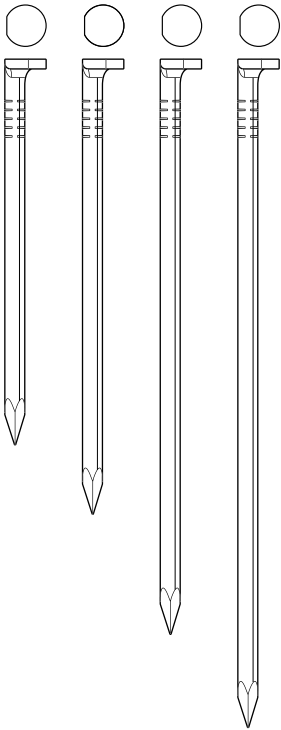


.113", .120", .131", 135"
2" - 4"



FN91T1,
KC27ASBX

FRAMING, SHEATHING, SUBFLOOR, DECKS, TRUSSES & PALLETS

Length	Diameter	Finish	Point	Coating	Collation	Count	Item Code	Compatible With				
2"	.113"	Bright	Diamond	Plain	30° Paper Tape Strip	2500	GE21APAX	●	●	●	●	●
2⅜"	.113"	Bright	Diamond	Sencote	30° Paper Tape Strip	2500	GE24APBX	●	●	●	●	●
3"	.120"	Bright	Diamond	Sencote	30° Paper Tape Strip	2500	HE27APBXN	●	●	●	●	●
3¼"	.131"	Bright	Diamond	Sencote	30° Paper Tape Strip	2500	KE28APBXN	●	●	●	●	●
2"	.113"	Hot Dip	Diamond	Sencote	30° Paper Tape Strip	2500	GE21ASBX	●	●	●	●	●
2⅜"	.113"	Hot Dip	Diamond	Sencote	30° Paper Tape Strip	1000	G624ASBXNR	●	●	●	●	●
2⅝"	.113"	Hot Dip	Diamond	Sencote	30° Paper Tape Strip	2500	GE24ASBX	●	●	●	●	●
3"	.120"	Hot Dip	Diamond	Sencote	30° Paper Tape Strip	1000	H627ASBXNR	●	●	●	●	●
3"	.120"	Hot Dip	Diamond	Sencote	30° Paper Tape Strip	2500	HE27ASBX	●	●	●	●	●
3"	.131"	Hot Dip	Diamond	Sencote	30° Paper Tape Strip	2500	KE27ASBXN	●	●	●	●	●
3¼"	.131"	Hot Dip	Diamond	Sencote	30° Paper Tape Strip	2500	KE28ASBXN	●	●	●	●	●
								F-35XP	FN91T	FRAMEPRO 325XP	FRAMEPRO 701XP	FRAMEPRO 751XP & 751XP-SL




SENCO PROHEAD® PAPER TAPE COLLATED NAILS:

- **OFFSET FULL ROUND HEAD DESIGN**
ProHead® nails are recognized under ICC ESR-1539 to comply with IBC and IRC building codes
- **SUPERIOR HOLDING POWER**
ProHead® nails are uniquely engineered with a robust head geometry that beats competitors in pull-through testing
- **FEWER PARTIAL-DRIVES AND PULL-OUTS**
ProHead® nails feature Sencote®, a proprietary coating that acts as both a lubricant and an adhesive, resulting in more fully completed drives and one of the highest withdrawal values in the industry
- **SUPERIOR STRIP INTEGRITY**
SENCO's clean wire manufacturing process yields nail strips that have superior tape adhesion for less broken collation
- **MORE NAILS PER STRIP**
Close shank to shank collation allows up to 10% more nails than other 30° -34° paper tape nails
- **PROUDLY MANUFACTURED IN CINCINNATI, OHIO**
Every box is uniquely stamped at time of production for Quality Assurance

30°

SMOOTH SHANK PAPER TAPE COLLATED NAILS


FRAMING, SHEATHING, SUBFLOOR, DECKS, TRUSSES & PALLETS								
Length	Diameter	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
2¼"	.113"	Bt. Hardened	Diamond	Plain	30° Paper Tape Strip	1000	GC23AHAK	● ● ● ● ● FRAMEPRO 751XP & 751XP-SL
3"	.131"	Stainless 304	Diamond	Sencote	30° Paper Tape Strip	1000	KC27AGBK	● ● ● ● ● FRAMEPRO 701XP
3¼"	.131"	Stainless 304	Diamond	Sencote	30° Paper Tape Strip	1000	KC28AGBK	● ● ● ● ● FRAMEPRO 325XP FN9TT F-35XP



30°

RING SHANK PAPER TAPE COLLATED NAILS

FRAMING, SHEATHING, SUBFLOOR, DECKS, TRUSSES & PALLETS								
Length	Diameter	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
2¾"	.113"	Stainless 304	Diamond	Sencote	30° Paper Tape Strip	1000	GE24AGBK	● ● ● ● ● FRAMEPRO 751XP & 751XP-SL FRAMEPRO 701XP FRAMEPRO 325XP FN9TT F-35XP



30°

SCREW SHANK PAPER TAPE COLLATED NAILS

FRAMING, SHEATHING, SUBFLOOR, DECKS, TRUSSES & PALLETS								
Length	Diameter	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
3"	.120"	Bright	Chisel	Plain	30° Paper Tape Strip	3100	HF27EPAK	● ● ● ● ● FRAMEPRO 751XP & 751XP-SL
3"	.120"	Bright	Chisel	Sencote	30° Paper Tape Strip	1000	HF27EDB	● ● ● ● ● FRAMEPRO 701XP FRAMEPRO 325XP FN9TT F-35XP



SMOOTH SHANK PLASTIC COLLATED NAILS


FRAMING, SHEATHING, SUBFLOOR, DECKS, TRUSSES & PALLETS

Length	Diameter	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
2⅜"	.113"	Bright	Diamond	Sencote	21° Plastic Strip	5000	GD24APBSN	● ● ● ● ●
2½"	.113"	Bright	Diamond	Sencote	21° Plastic Strip	5000	GD25APBSN	● ● ● ● ●
3"	.120"	Bright	Diamond	Sencote	21° Plastic Strip	4000	HD27APBSN	● ● ● ● ●
2½"	.131"	Bright	Diamond	Sencote	21° Plastic Strip	4000	KD25APBSN	● ● ● ● ●
3"	.131"	Bright	Diamond	Sencote	21° Plastic Strip	1000	KD27APBSNR	● ● ● ● ●
3"	.131"	Bright	Diamond	Sencote	21° Plastic Strip	4000	KD27APBSN	● ● ● ● ●
3¼"	.131"	Bright	Diamond	Sencote	21° Plastic Strip	1000	KD28APBSNR	● ● ● ● ●
3¼"	.131"	Bright	Diamond	Sencote	21° Plastic Strip	4000	KD28APBSN	● ● ● ● ●
3½"	.131"	Bright	Diamond	Sencote	21° Plastic Strip	4000	KD29APBSN	● ● ● ● ●
3"	.148"	Bright	Diamond	Sencote	21° Plastic Strip	4000	MD27APBSN	● ● ● ● ●
3¼"	.148"	Bright	Diamond	Sencote	21° Plastic Strip	4000	MD28APBSN	● ● ● ● ●
2½"	.113"	Galv	Diamond	Sencote	21° Plastic Strip	5000	GD25AABSN	● ● ● ● ●
2½"	.131"	Galv	Diamond	Sencote	21° Plastic Strip	2500	KD25AABS	● ● ● ● ●
2⅜"	.113"	Hot Dip	Diamond	Sencote	21° Plastic Strip	2500	GD24ASBS	● ● ● ● ●
3"	.131"	Hot Dip	Diamond	Sencote	21° Plastic Strip	1000	KD27ASBSNR	● ● ● ● ●
3"	.131"	Hot Dip	Diamond	Sencote	21° Plastic Strip	2500	KD27ASBS	● ● ● ● ●
3¼"	.131"	Hot Dip	Diamond	Sencote	21° Plastic Strip	1000	KD28ASBSNR	● ● ● ● ●
3¼"	.131"	Hot Dip	Diamond	Sencote	21° Plastic Strip	2500	KD28ASBS	● ● ● ● ●
3½"	.131"	Hot Dip	Diamond	Sencote	21° Plastic Strip	2500	KD29ASBS	● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●
								● ● ● ● ●



RING SHANK SUBFLOORING NAILS

SUBFLOOR & SHEATHING								
Length	Diameter	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
2"	.099"	Bright Basic	Diamond	Sencote	15° Flat Wire Welded Coil	6600	BT21APBF	● ●
2⅝"	.113"	Bright Basic	Diamond	Sencote	15° Flat Wire Welded Coil	4000	GT24APBF	● ●
2½"	.131"	Bright Basic	Diamond	Sencote	15° Flat Wire Welded Coil	4000	KT25APBF	● ●
								SCN60XP SCN65XP & 65XP-SL




.099", .113", .131"
2" - 2½"



SMOOTH SHANK COIL NAILS

FRAMING, SHEATHING, PALLETS, SUBFLOOR, DECKS & TRUSSES								
Length	Diameter	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
2"	.113"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	6000	GD21APBF	● ●
2½"	.113"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	6000	GD25APBF	● ●
3"	.120"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	4000	HD27APBF	●
2½"	.131"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	3600	KD25APBF	●
3"	.131"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	3600	KD27APBF	●
3¼"	.131"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	3600	KD28APBF	●
3½"	.131"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	3600	KD29APBF	●
5"	.148"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	1800	MD34APBF	
2"	.113"	Galv	Diamond	Sencote	15° Flat Wire Welded Coil	6000	GD21AABF	● ●
2½"	.113"	Galv	Diamond	Sencote	15° Flat Wire Welded Coil	6000	GD25AABF	● ●
3"	.131"	Hot Dip	Diamond	Sencote	15° Flat Wire Welded Coil	2400	KD27ASBF	●
3¼"	.131"	Hot Dip	Diamond	Sencote	15° Flat Wire Welded Coil	2400	KD28ASBF	●
								SCN60XP SCN65XP & 65XP-SL

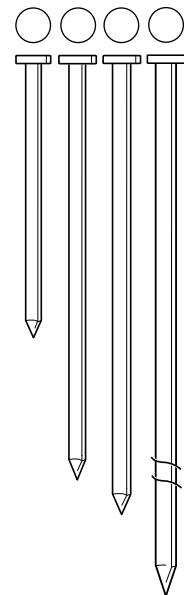


.113", .121", .131", .148"
2" - 5"



RING SHANK COIL NAILS

FRAMING, SHEATHING, PALLETS, SUBFLOOR, DECKS & TRUSSES								
Length	Diameter	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
2"	.099"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	6600	BL21APBF	● ●
2"	.099"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	6600	BT21APBF	● ●
2"	.113"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	6000	GL21APBF	● ●
2⅝"	.113"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	6000	GL24APBF	● ●
2¼"	.099"	Galv	Diamond	Sencote	15° Flat Wire Welded Coil	6600	BE23AABF	● ●
2⅝"	.113"	Hot Dip	Diamond	Sencote	15° Flat Wire Welded Coil	2700	GL24ASBF	● ●
3"	.120"	Hot Dip	Diamond	Sencote	15° Flat Wire Welded Coil	2400	HL27ASBF	●
2⅝"	.113"	Stainless 304	Diamond	Sencote	15° Flat Wire Welded Coil	2700	GL24AGBF	● ●
								SCN60XP SCN65XP & 65XP-SL

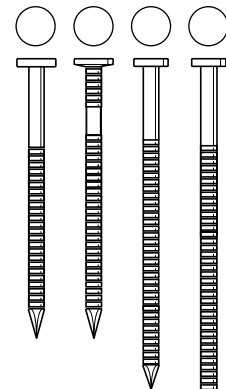

.099", .113", .120"
2" - 3"

15°
COIL


SCREW SHANK COIL NAILS

FRAMING, SHEATHING, PALLETS, SUBFLOOR, DECKS & TRUSSES

Length	Diameter	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
2"	.099"	Bright	Blunt Dia.	Sencote	15° Flat Wire Welded Coil	9000	BK21BPBFN	● ●
2¼"	.099"	Bright	Blunt Dia.	Sencote	15° Flat Wire Welded Coil	9000	BK23BPBFN	● ●
2½"	.099"	Bright	Blunt Dia.	Sencote	15° Flat Wire Welded Coil	6000	BK25BPBFN	● ●
3"	.120"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	4000	HK27APBFN	● ●

SCN60XP

SCN65XP & 65XP-SL



15°
COIL

SMOOTH SHANK STIFF-STOCK COIL NAILS

FASTENING WOOD TO MASONRY

Length	Diameter	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
1½"	.099"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	3000	M003011	

15°
COIL


DUPLEX SMOOTH SHANK COIL NAILS

FRAMING, TRUSSES, CRATING & CONCRETE FORMS

Length	Diameter	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
2½"	.120"	Bright	Diamond	Plain	15° Flat Wire Welded Coil	5400	HR22APAF	●
2⅞"	.120"	Bright	Diamond	Plain	15° Flat Wire Welded Coil	3600	HR74APAF	●

*Requires a special-order modified SCN60XP tool (order XA1739)

SCN60XP*

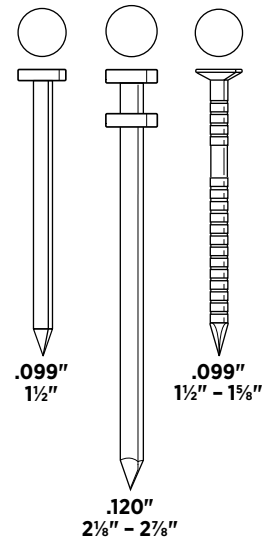

15°
COIL

DRYWALL RING SHANK BUGLE HEAD COIL NAILS

FASTENING DRYWALL TO WOOD

Length	Diameter	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
1½"	.099"	Galv	Diamond	Plain	15° Conical Wire Welded Coil	6400	BG17AAAQ	
1⅞"	.099"	Galv	Diamond	Plain	15° Conical Wire Welded Coil	6400	BG18AAAQ	


CP
CONCRETE
PIN

COLLATED CONCRETE & STEEL PINS

DRYWALL TRACK, WOOD FURRING, HAT CHANNELS, METAL WASHERS OR CEILING GRID TO CONCRETE, CONCRETE BLOCK & STEEL

Length	Diameter	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
½"	.109"/.118"	Zinc Plated	Pinched	Plain	Straight Plastic Collated Strip	1000	W3050YXS	●
¾"	.109"	Zinc Plated	Pinched	Plain	Straight Plastic Collated Strip	1000	W3075YXC	●
1"	.109"	Zinc Plated	Pinched	Plain	Straight Plastic Collated Strip	1000	W3100YXC	●
1¼"	.109"	Zinc Plated	Pinched	Plain	Straight Plastic Collated Strip	1000	W3125YXC	●
1½"	.109"	Zinc Plated	Pinched	Plain	Straight Plastic Collated Strip	1000	W3150YXC	●

SCP40XP






HARDENED METAL CONNECTOR NAILS

JOIST HANGERS, FOUNDATION ANCHORS, SEISMIC & HURRICANE STRAPS/TIES

Length	Diameter	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
1½"	.148"	Bright	Diamond	Plain	34° Paper Tape Strip	3000	MD17AQBD	● ● ● ●
2½"	.148"	Bright	Diamond	Plain	34° Paper Tape Strip	2500	MD25AQBDN	● ● ● ●
2½"	.162"	Bright	Diamond	Plain	34° Paper Tape Strip	2000	ND25AQBDN	● ● ● ●
2½"	.148"	Hot Dip	Diamond	Plain	34° Paper Tape Strip	2500	MD25AJBDN	● ● ● ●
1½"	.148"	Hot Dip	Diamond	Plain	34° Paper Tape Strip	3000	MD17AJBDN	● ● ● ●
2½"	.162"	Hot Dip	Diamond	Plain	34° Paper Tape Strip	2000	ND25AJBDN	● ● ● ●
								JN91H1 JN91H2 JN91P1 JN91P2




NON-HEAT TREATED METAL CONNECTOR NAILS

STANDARD TENSILE, NON-HARDENED NAILS FOR JOIST HANGERS, FOUNDATION ANCHORS, SEISMIC & HURRICANE STRAPS/TIES

Length	Diameter	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
1½"	.131"	Bright	Diamond	Plain	34° Paper Tape Strip	2000	M002261	● ● ● ●
1½"	.148"	Bright	Diamond	Plain	34° Paper Tape Strip	2000	M002263	● ● ● ●
2½"	.148"	Bright	Diamond	Plain	34° Paper Tape Strip	1500	M002265	● ● ● ●
1½"	.131"	Hot Dip	Diamond	Plain	34° Paper Tape Strip	2000	M002262	● ● ● ●
1½"	.148"	Hot Dip	Diamond	Plain	34° Paper Tape Strip	2000	M002264	● ● ● ●
2½"	.148"	Hot Dip	Diamond	Plain	34° Paper Tape Strip	1500	M002266	● ● ● ●
								JN91H1 JN91H2 JN91P1 JN91P2

.131", .148", .162"
1½" - 2½"




1" CROWN HEAVY WIRE STAPLES

SHEATHING, HOUSE WRAP, COMPOSITE ROOFING, ROOFING FELT, CORRUGATED CONTAINERS, FOAM INSULATION BOARD, FURNITURE/CABINET FRAMES & BUTT JOINTS

Length	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
3⁄8"	Galv	Chisel	Plain	Glued	10,000	P06BAA*	●
1⁄2"	Galv	Chisel	Sencote	Taped	10,000	P08BABT*	●
5⁄8"	Galv	Chisel	Sencote	Taped	10,000	P10BAB*	●
5⁄8"	Galv	Divergent	Sencote	Glued	10,000	P10FAB*	●
5⁄8"	Galv	Chisel	Coated	Glued	10,000	P10BPE*	●
3⁄4"	Galv	Chisel	Sencote	Taped	10,000	P11BAB	●
3⁄4"	Galv	Chisel	Coated	Glued	10,000	P11BPE	●
7⁄8"	Galv	Chisel	Sencote	Taped	10,000	P12BAB	● ●
1"	Galv	Chisel	Sencote	Taped	10,000	P13BAB	● ●
1"	Galv	Chisel	Sencote	Glued	10,000	P13BPE	● ●
1"	Galv	Chisel	Plain	Glued	1000	P13BABR	● ●
1¼"	Galv	Chisel	Sencote	Taped	10,000	P15BAB	● ●
1¼"	Galv	Chisel	Coated	Glued	10,000	P15BPE	● ●
1¼"	Galv	Chisel	Plain	Glued	1000	P15BABR	● ●
1½"	Galv	Chisel	Sencote	Taped	10,000	P17BAB	● ●
1¾"	Galv	Chisel	Sencote	Taped	5000	P19BAB	●
2"	Galv	Chisel	Sencote	Taped	5000	P21BAB	●
1"	Stainless 304	Outside Chisel	Sencote	Taped	5000	P13BGBN	● ●

*Use kit #YK0883 with PS15XP for ⅜" - ⅝" staples

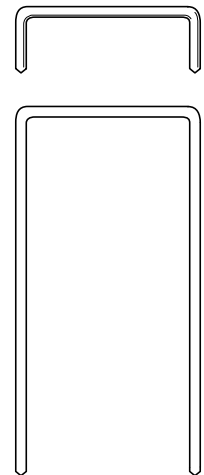

⅜" - 2"

16
N


7/16" CROWN HEAVY WIRE STAPLES

SHEATHING, SOFFITS, UNDERLAYMENT, LATTICE, CABINETS, CASEBACKS & DRAWERS

Length	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
1 1/8"	Bright	Chisel	Sencote	Taped	10,000	N14BRB	● ● ● ●
1 1/4"	Bright	Chisel	Sencote	Taped	10,000	N15BRB	● ● ● ● ●
1 3/8"	Bright	Chisel	Sencote	Taped	10,000	N16BRB	● ● ● ● ●
1 1/2"	Bright	Chisel	Sencote	Taped	10,000	N17BRB	● ● ● ● ●
1 5/8"	Bright	Chisel	Sencote	Taped	10,000	N18BRB	● ● ● ● ●
1 3/4"	Bright	Chisel	Sencote	Taped	10,000	N19BRB	● ● ● ● ●
2"	Bright	Chisel	Sencote	Taped	10,000	N21BRB	● ● ● ● ●
1 1/2"	Galv	Chisel	Sencote	Glued	5000	N08BABN	
3/4"	Galv	Chisel	Sencote	Glued	5000	N11BAB	
7/8"	Galv	Chisel	Sencote	Glued	5000	N12BABN	
7/8"	Galv	Diverg	Sencote	Glued	5000	N12FABN	
1"	Galv	Chisel	Sencote	Glued	5000	N13BAB	● ● ● ●
1"	Galv	Diverg	Sencote	Glued	5000	N13FAB	● ● ● ●
1 1/8"	Galv	Chisel	Sencote	Taped	10,000	N14BAB	● ● ● ● ●
1 1/4"	Galv	Chisel	Sencote	Taped	10,000	N15BAB	● ● ● ● ●
1 3/8"	Galv	Chisel	Sencote	Taped	10,000	N16BAB	● ● ● ● ●
1 1/2"	Galv	Chisel	Sencote	Taped	10,000	N17BAB	● ● ● ● ●
1 5/8"	Galv	Chisel	Sencote	Taped	10,000	N18BAB	● ● ● ● ●
1 3/4"	Galv	Chisel	Sencote	Taped	10,000	N19BAB	● ● ● ● ●
2"	Galv	Chisel	Sencote	Taped	10,000	N21BAB	● ● ● ● ●
1 1/2"	Galv*	Chisel	Sencote	Glued	5000	N08BBBN	
1 1/2"	Galv*	Diverg	Sencote	Glued	5000	N08FBB	
5/8"	Galv*	Chisel	Sencote	Glued	5000	N10BAB	
3/4"	Galv*	Diverg	Sencote	Glued	5000	N11FBB	
1 1/2"	Stainless 304	Chisel	Sencote	Glued	3000	N17BGB	● ● ● ● ●
1 3/4"	Stainless 304	Chisel	Sencote	Glued	3000	N19BGBN	● ● ● ● ●
2"	Stainless 304	Chisel	Sencote	Glued	3000	N21BGBN	● ● ● ● ●

*Galvanized high-tensile steel

NS20XP
NS20BXP
SNS41
SNS45XP
SNS50XP



1/2" - 2"


15
Q

7/16" CROWN HEAVY WIRE STAPLES

FRAMING, SHEATHING, SUBFLOORING, DECKING, LATHING, DOOR & WINDOW UNITS, FENCING, PALLETS, CRATE & BOX ASSEMBLY, FURRING & FURNITURE FRAMING

Length	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
1 1/2"	Bright	Chisel	Sencote	Taped	5000	Q17BRB	●
1 3/4"	Bright	Chisel	Sencote	Taped	5000	Q19BRB	●
2"	Bright	Chisel	Sencote	Taped	5000	Q21BRB	●
2 1/4"	Bright	Chisel	Sencote	Taped	5000	Q23BRB	●
2 1/2"	Bright	Chisel	Sencote	Taped	5000	Q25BRB	●
1 1/4"	Galv	Chisel	Sencote	Taped	5000	Q15BAB	●
1 1/2"	Galv	Chisel	Sencote	Taped	5000	Q17BAB	●
1 3/4"	Galv	Chisel	Sencote	Taped	5000	Q19BAB	●
2"	Galv	Chisel	Sencote	Taped	5000	Q21BAB	●
2 1/2"	Galv	Chisel	Sencote	Taped	5000	Q25BAB	●
2 1/2"	Stainless 304	Chisel	Sencote	Taped	1000	Q25BGBN	●

SQS55XP

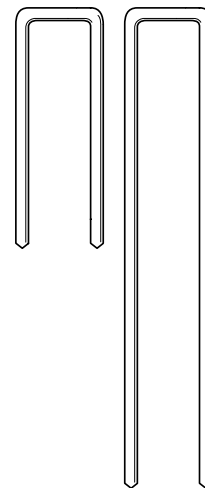

1 1/4" - 2 1/2"

ROOFING, SIDING & FENCING

WE COVER IT ALL

When it comes to roofing applications or installing siding, uptime is everything. SENCO has designed a full line of tools and fasteners to maximize your productivity. Our RoofPro™ 445XP with its innovative firing valve uses 5% less air. A bi-metal driver blade increases durability and our power in, power out feed system is air driven for stability and speed.

APPLICATIONS

SENCO offers a variety of coil nailers, crown staplers and cap staplers with fasteners optimized for different types of shingles, siding, sheathing, and felt underlayment.

KEY FEATURES

- High-strength housings
- Long-lasting wear plates
- Easy, one-handed operation
- Adjustable depth of drive



SN71P1

ROOFPRO™445XP

1¼" COIL NAILER



RF
ROOFING

TOOL OVERVIEW

- Drives 15° coil roofing nails ¾" to 1¼" in length
- Innovative firing valve reduces air consumption without compromise on power & speed
- Bi-metal driver blade reduces wear & improves durability
- Canister metal wear plate reduces canister wear & aids in nail feed
- Adjustable & removable shingle guide for accurate shingle placement

APPLICATIONS

Asphalt & fiberglass shingle nailing, attaching tar paper, metal drip edge & insulation board (vinyl & aluminum siding with optional attachment #HA0308)

SN71P1

2½" 15° COIL SIDING NAILER



15°
COIL

TOOL OVERVIEW

- Drives 15° coil roofing nails 1¼" to 2½" in length
- Dual collation—allows the choice between wire or plastic collation
- Tool-free depth of drive
- High load capacity (up to 375 nails)
- Overmold grip
- Rotatable rafter hook

APPLICATIONS

Siding, decking, exterior trim, fencing, wood shingles, crate, box assembly



TOOL SPECIFICATIONS

MODEL NAME ITEM #	ROOFPRO™445XP 8V0001N	SN71P1
Trigger	Contact	Selectable
Operating Pressure	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)
Air Consumption (60 CPM)	3.86 scfm	4.6 scfm
Air Inlet	¼" NPT	⅜" NPT
Weight	5.2 lbs (2.35 kg)	5.58 lbs (2.53 kg)
Height	10.9" (276 mm)	12.75" (324 mm)
Length	10.6" (269 mm)	11.63" (295 mm)
Width	4.5" (114 mm)	5.06" (129 mm)
Main Body Material	Aluminum	Magnesium
Warranty	5 yrs	5 yrs
FASTENERS	FASTENERS ARE LOCATED ON PAGES 49-50	
Range	¾"-1¼"	1¼"-2½"
Diameter	.120"	.082"-.092"
Capacity	120	250-375
Angle/Collation	15° Flat Wire Welded	Coil 15° Flat Wire Welded or Plastic Carrier Coil

PS15RXP
16 GA. 1" WIDE CROWN, 1½" ROOFING STAPLER



16
GA
P

TOOL OVERVIEW

- Drives 16 GA. 1" crown staples ⅝" to 1½" in length
- Quick clear latch to easily clear jams or misfeeds
- Drive track eliminates unwanted movement of staple, enhancing overall drive performance
- Robust firing valve makes the tool faster, more powerful & easier to maintain

APPLICATIONS

Asphalt & fiberglass shingles, roofing felt, wire lathe, foam insulation board

A11
20 GA. ⅞" CROWN, ⅜"HAMMER STAPLER



20
GA
H

TOOL OVERVIEW

- Drives 20 GA. ⅞" crown staples ⅜" in length

APPLICATIONS

Plastic sheeting

CS61H1
⅝" CROWN, 1½" STAPLE & 1" CAP STAPLER



CAP
STAPLE

TOOL OVERVIEW

- Rugged top-load magazine keeps caps secure during use
- Cap bypass switch to drive staples for door and window jambs
- In-line compact feed system for optimal line of sight
- Wear guards for increased durability
- Cap alignment plate keeps caps firmly in place

APPLICATIONS

House wrap, roofing felt, foam board



TOOL SPECIFICATIONS


MODEL NAME ITEM #	PS15RXP 9U0001N	CS61H1	A11 PC0700
Trigger	Contact	Selectable	—
Operating Pressure	70–120 psi (4.8–8.3 bar)	70–120 psi (4.8–8.3 bar)	—
Air Consumption (60 CPM)	3.18 scfm	2.25 scfm	—
Air Inlet	⅜" NPT	¼" NPT	—
Weight	5.5 lbs (2.5 kg)	4.48 lbs (2.0 kg)	2 lbs (.9 kg)
Height	9" (229 mm)	10.25" (260.4 mm)	1.75" (44.4 mm)
Length	15.25" (387 mm)	15.65" (397.6 mm)	12.3" (312.4 mm)
Width	4" (105 mm)	3.95" (100.4 mm)	—
Main Body Material	Aluminum	Aluminum	Steel
Warranty	5 yrs	5 yrs	1 yr
FASTENERS			
FASTENERS ARE LOCATED ON PAGES 49–51			
Gauge	16	18	20
Crown	1"	⅝"	⅞"
Range	⅝"–1½"	⅝"–1½"	⅜"
Capacity	160	125 Staples/200 Caps	168
Angle/Collation	Taped & Taped Glued	Straight Glued Strip/Collated Caps	Straight Glued Strip

SMOOTH SHANK COIL NAILS

SIDING, ASPHALT & FIBERGLASS SHINGLES, VAPOR BARRIERS

Length	Diameter	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
¾"	.120"	Galv	Diamond	Plain	15° Flat Wire Welded Coil	7200	M003101	●
1"	.120"	Galv	Diamond	Plain	15° Flat Wire Welded Coil	7200	M003103	●
1¼"	.120"	Galv	Diamond	Plain	15° Flat Wire Welded Coil	7200	M003104	●
1½"	.120"	Galv	Diamond	Plain	15° Flat Wire Welded Coil	7200	M003105	●
1¾"	.120"	Galv	Diamond	Plain	15° Flat Wire Welded Coil	7200	M003106	●

ROOFPRO™ 445XP

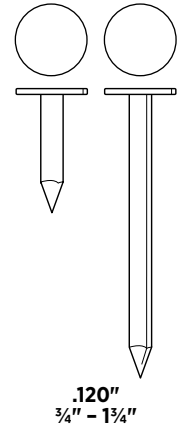


SMOOTH SHANK COIL NAILS

SIDING, PACKAGING, FENCING, PALLETS & UNDERLAYMENT

Length	Diameter	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
1½"	.099"	Bright	Diamond	Sencote	15° Plastic Carrier Coil	6000	BD17APBC	
2¼"	.092"	Galv	Diamond	Sencote	15° Flat Wire Welded Coil	3600	ED23AABH	●
2¼"	.092"	Hot Dip	Diamond	Sencote	15° Plastic Carrier Coil	3600	EJ23ASBC	●

SN71P1

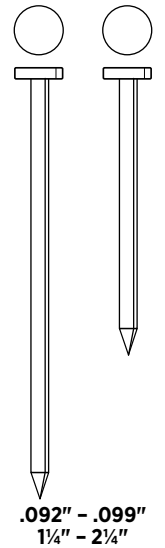


15^o
COIL

RING SHANK COIL NAILS

SIDING, PACKAGING, FENCING, WOOD SHINGLES, CRATING & PALLETS								
Length	Diameter	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
1¼"	.082"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	14,000	SE15APBH	●
1¼"	.082"	Bright	Diamond	Sencote	15° Conical Wire Welded Coil	15,000	SE15APB	●
1½"	.082"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	11,200	SE17APBH	●
1¾"	.082"	Bright	Diamond	Sencote	15° Conical Wire Welded Coil	12,000	SE19APB	●
1⅞"	.092"	Galv	Diamond	Sencote	15° Flat Wire Welded Coil	3600	EL20AABH	●
2¼"	.092"	Galv	Diamond	Sencote	15° Flat Wire Welded Coil	3600	EL23AABH	●
1¾"	.092"	Hot Dip	Diamond	Sencote	15° Flat Wire Welded Coil	3600	EL19ASBH	●
1⅞"	.092"	Hot Dip	Diamond	Sencote	15° Flat Wire Welded Coil	3600	EL20ASBH	●
2"	.092"	Hot Dip	Diamond	Sencote	15° Flat Wire Welded Coil	3600	EL21ASBH	●
2¼"	.092"	Hot Dip	Diamond	Sencote	15° Plastic Carrier Coil	3600	EL23ASBC	●
2¼"	.092"	Hot Dip	Diamond	Sencote	15° Flat Wire Welded Coil	3600	EL23ASBH	●
1¾"	.092"	Stainless 304	Diamond	Sencote	15° Flat Wire Welded Coil	3600	EL19AGBH	●
2"	.092"	Stainless 304	Diamond	Sencote	15° Flat Wire Welded Coil	3600	EL21AGBH	●
2¼"	.092"	Stainless 304	Diamond	Sencote	15° Flat Wire Welded Coil	3600	EL23AGBH	●

SN71P1




16^{GA}
P

1" CROWN HEAVY WIRE STAPLES

COMPOSITE ROOFING, ROOFING FELT, FOAM INSULATION BOARD, HOUSE WRAP, SHEATHING, CORRUGATED CONTAINERS, FURNITURE/CABINETS & BUTT JOINTS							
Length	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
⅜"	Galv	Chisel	Plain	Glued	10,000	P06BAA*	●
½"	Galv	Chisel	Sencote	Taped	10,000	P08BABT*	●
⅝"	Galv	Chisel	Sencote	Taped	10,000	P10BAB*	●
⅝"	Galv	Divergent	Sencote	Glued	10,000	P10FAB*	●
⅝"	Galv	Chisel	Coated	Glued	10,000	P10BPE*	●
¾"	Galv	Chisel	Sencote	Taped	10,000	P11BAB	●
¾"	Galv	Chisel	Coated	Glued	10,000	P11BPE	●
⅞"	Galv	Chisel	Sencote	Taped	10,000	P12BAB	●
1"	Galv	Chisel	Sencote	Taped	10,000	P13BAB	●
1"	Galv	Chisel	Sencote	Glued	10,000	P13BPE	●
1¼"	Galv	Chisel	Sencote	Taped	10,000	P15BAB	●
1¼"	Galv	Chisel	Coated	Glued	10,000	P15BPE	●
1½"	Galv	Chisel	Sencote	Taped	10,000	P17BAB	●
1"	Stainless 304	Outside Chisel	Sencote	Taped	5000	P13BGBN	●

PS15RXP

*Use kit #YK0883 with PS15RXP for ⅜" to ⅝" staples

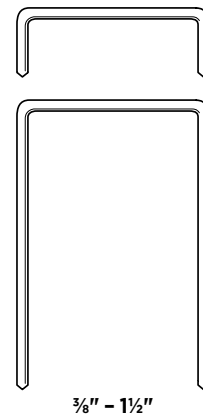




1" CAP & 3/8" CROWN STAPLES

ROOF FELT INSTALLATION & HOUSE WRAP

Length	Finish	Point	Coating	Collation	Staple/Cap Count	Item Code	Compatible With
5/8"	Galv	Chisel	Plain	Glued	2000/2000	CS10BAA	●
7/8"	Galv	Chisel	Plain	Glued	2000/2000	CS12BAA	●
1 1/4"	Galv	Chisel	Plain	Glued	2000/2000	CS15BAA	●
1 1/2"	Galv	Chisel	Plain	Glued	2000/2000	CS17BAA	●

CS61H1



5/8" - 1 1/2"

1"




3/8" CROWN FINISH STAPLES

ROOF FELT INSTALLATION & HOUSE WRAP - STAPLES ONLY, CAPS NOT INCLUDED

Length	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
5/8"	Galv	Chisel	Sencote	Glued	5000	M10BABN	●
3/4"	Galv	Chisel	Sencote	Glued	5000	M11BABN	●
7/8"	Galv	Chisel	Sencote	Glued	5000	M12BAB	●
1"	Galv	Chisel	Sencote	Glued	5000	M13BAB	●
1 1/4"	Galv	Chisel	Sencote	Glued	10,000	M15BAB	●
1 1/2"	Galv	Chisel	Sencote	Glued	10,000	M17BAB	●

CS61H1



5/8" - 1 1/2"

1"




1" CAP

ROOF FELT INSTALLATION & HOUSE WRAP - CAPS ONLY, STAPLES NOT INCLUDED

Diameter	Material	Collation	Count	Item Code	Compatible With
1"	Plastic	Coil	2400	CAP2400	●

CS61H1



1"




7/16" CROWN FINE WIRE STAPLES

ROOFING, INSULATION & VAPOR BARRIERS

Length	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
3/8"	Galv	Chisel	Plain	Glued	5000	H06BAA	●

A11



3/8"

PALLETS & CRATING

THE DURABILITY TO DRIVE ALL DAY

SENCO's PalletPro™ heavy-duty coil nailers are built specifically for the challenges of pallets and crating. The PalletPro™130XP can drive fasteners as long as 5⅞" and hold up to 225 nails.

APPLICATIONS

Pallets, crates, heavy-duty framing and truss attachment.

KEY FEATURES

- Durable drivers and bumpers
- Flexible collation deflectors
- Dust guards for safe operation and extended use

Clinch and sisal anvil 18 and 20 gauge staple tools drive ½" and ⅞" crown staples and are ideal for hand-held or mounted applications.

APPLICATIONS

Packaging, corrugated box fabrication, shoe making and bedding – basically any time two materials must be stapled and clinched together.

KEY FEATURES

- High-capacity magazines
- Extended reach capability
- Tool-free adjustable anvil opening
- Bottom-load magazines



PALLETPRO™100XP

PALLETPRO™57FXP

2¼" 15° COIL NAILER



15°
COIL

TOOL OVERVIEW

- Drives 15° flat wire wound coil nails 1" to 2¼" in length
- High capacity magazine holds up to 350 fasteners
- Tool-free depth adjustment for consistent flush or countersunk drives
- Side steel wear plates reduce abrasion
- Strengthened driver & piston bumper improve performance & durability

APPLICATIONS

Boxes, carton to skid, crate & pallet assembly

PALLETPRO™100XP

4" 15° COIL NAILER (SPECIAL ORDER TOOL)



15°
COIL

TOOL OVERVIEW

- Drives 15° flat wire welded coil nails 2¼" to 4" in length
- Strengthened driver & piston bumper improve performance & durability
- Heavy-duty threaded T-handle for extra stability when needed
- Flexible collation deflector & debris shield protects the operator & tool when in use

APPLICATIONS

Pallets, framing, engineered lumber, truss attachment, commercial applications

PALLETPRO™130XP

5½" 15° COIL NAILER (SPECIAL ORDER TOOL)



15°
COIL

TOOL OVERVIEW

- Drives 15° flat wire welded coil nails 3" to 5½" in length
- Strengthened driver & piston bumper improve performance & durability
- Heavy-duty threaded T-handle for extra stability when needed
- High capacity magazine holds up to 225 fasteners

APPLICATIONS

Heavy-duty pallet construction, pallet repair, crate & box assembly, sheathing, decking, subflooring



PALLETPRO™100XP

TOOL SPECIFICATIONS

MODEL NAME ITEM #	PALLETPRO™57FXP 4L0001N	PALLETPRO™100XP 5L0001N	PALLETPRO™130XP 5M0001N
Trigger	Contact	Contact	Sequential
Operating Pressure	70-120 psi (4.9-8.4 bar)	70-120 psi (4.9-8.4 bar)	70-120 psi (4.9-8.4 bar)
Air Consumption (60 CPM)	3.07 scfm	11.4 scfm	11.4 scfm
Air Inlet	¾" NPT	¾" NPT	¾" NPT
Weight	5.9 lbs (2.67 kg)	11.5 lbs (5.24 kg)	13 lbs (5.9 kg)
Height	11.25" (286 mm)	16.5" (418 mm)	18" (457 mm)
Length	11.88" (302 mm)	13.25" (338 mm)	13" (330 mm)
Width	5.25" (123 mm)	6" (153 mm)	6.6" (168 mm)
Main Body Material	Aluminum	Aluminum	Aluminum
Warranty	5 yrs	5 yrs	5 yrs
FASTENERS			
FASTENERS ARE LOCATED ON PAGES 55-57			
Range	1"-2¼"	2¼"-4"	3"-5½"
Diameter	.082"-.092"	.099"-.148"	.120"-.148"
Capacity	300-350	225-300	120-225
Angle/Collation	15° Flat Wire Welded Coil	15° Flat Wire Welded Coil	15° Flat Wire Welded Coil

DFPXP
20 GA. 1/2" CROWN, 1/2" STAPLE CLINCH TOOL



20_{GA}
F

TOOL OVERVIEW

- Drives 20 GA. 1/2" crown staples 5/16" to 1/2" in length
- High capacity magazine holds 230 fasteners
- Tool-free adjustable anvil opening
- Bottom-load magazine for quick reloading
- Ergonomic overmolded grip reduces fatigue & increases control of the tool

APPLICATIONS

Corrugated box fabrication, assembly & packaging

F75SXP
18 GA. 7/16" CROWN, 5/8" STAPLE SISAL ANVIL



18_{GA}
J

TOOL OVERVIEW

- Drives 18 GA. 7/16" crown staples 3/8" to 5/8" in length
- High capacity magazine holds 152 fasteners
- Tool-free adjustable anvil opening
- Bottom-load magazine for quick reloading

APPLICATIONS

Corrugated box fabrication, assembly & packaging

TOOL SPECIFICATIONS

MODEL NAME ITEM #	DFPXP 8H0001N	F75LXP 8J0002N	F75SXP 8J0001N
Trigger	Sequential	Sequential	Sequential
Operating Pressure	65-100 psi (4-7 bar)	65-100 psi (4-7 bar)	65-100 psi (4-7 bar)
Air Consumption (60 CPM)	.7 scfm	.7 scfm	.8 scfm
Air Inlet	1/4" NPT	1/4" NPT	1/4" NPT
Weight	4.9 lbs (2.24 kg)	4.9 lbs (2.24 kg)	4.9 lbs (2.24 kg)
Height	12.9" (327 mm)	12.9" (327 mm)	12.9" (327 mm)
Length	14.9" (380 mm)	14.9" (380 mm)	14.9" (380 mm)
Width	3" (75 mm)	3" (75 mm)	3" (75 mm)
Main Body Material	Aluminum	Aluminum	Aluminum
Warranty	5 yrs	5 yrs	5 yrs
FASTENERS	FASTENERS ARE LOCATED ON PAGE 57		
Gauge	20	18	18
Crown	1/2"	7/16"	7/16"
Range	5/16"-5/8"	5/16"-5/8"	5/16"-5/8"
Capacity	230	152	152
Angle/Collection	Straight Glued Strip	Straight Glued Strip	Straight Glued Strip

F75LXP
18 GA. 7/16" CROWN, 5/8" STAPLE CLINCH TOOL




18_{GA}
J

TOOL OVERVIEW

- Drives 18 GA. 7/16" crown staples 3/8" to 5/8" in length
- High capacity magazine holds 152 fasteners
- Tool-free adjustable anvil opening
- Bottom-load magazine for quick reloading
- Ergonomic overmolded grip reduces fatigue & increases control of the tool

APPLICATIONS

Corrugated box fabrication, assembly & packaging

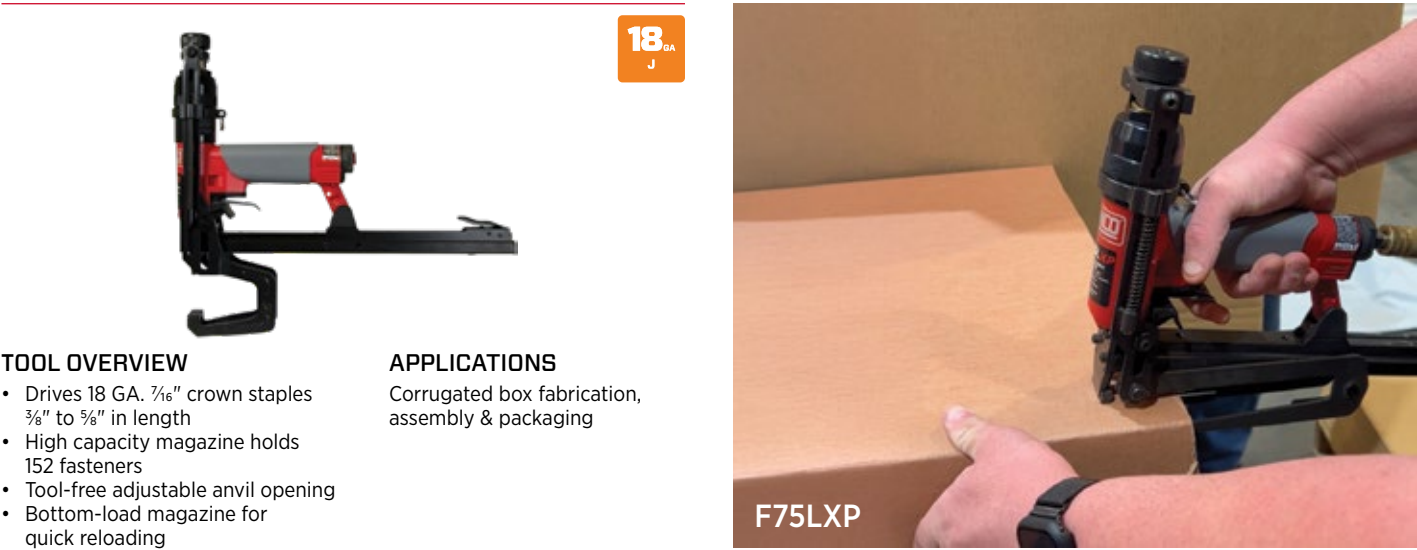


F75LXP

SMOOTH SHANK COIL NAILS

PALLETS, FRAMING, SHEATHING, SUBFLOOR, DECKS, TRUSSES, CRATES, FENCING, SIDING & UNDERLAYMENT

Length	Diameter	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
2"	.113"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	6000	GD21APBF	●
2½"	.113"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	6000	GD25APBF	●
3"	.120"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	4000	HD27APBF	● ●
2½"	.131"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	3600	KD25APBF	●
3"	.131"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	3600	KD27APBF	● ●
3¼"	.131"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	3600	KD28APBF	● ●
3½"	.131"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	3600	KD29APBF	● ●
5"	.148"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	1800	MD34APBF	●
2¼"	.092"	Galv	Diamond	Sencote	15° Flat Wire Welded Coil	3600	ED23AABH	● ●
2"	.113"	Galv	Diamond	Sencote	15° Flat Wire Welded Coil	6000	GD21AABF	●
2½"	.113"	Galv	Diamond	Sencote	15° Flat Wire Welded Coil	6000	GD25AABF	●
3"	.131"	Hot Dip	Diamond	Sencote	15° Flat Wire Welded Coil	2400	KD27ASBF	● ●
3¼"	.131"	Hot Dip	Diamond	Sencote	15° Flat Wire Welded Coil	2400	KD28ASBF	● ●

PALLETPRO™130XP
PALLETPRO™100XP
PALLETPRO™57FXP

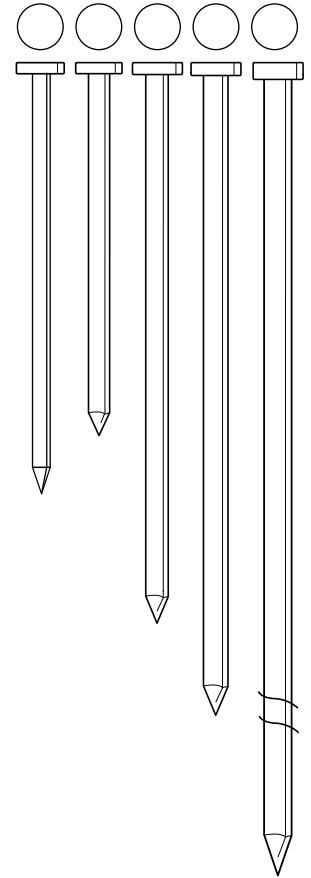


.092", .113", .120", .131", .148"
2" - 5"

RING SHANK COIL NAILS

PALLETS, CRATES, FENCING, WOOD SHINGLES, SIDING & UNDERLAYMENT

Length	Diameter	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
1¼"	.082"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	14,000	SE15APBH	●
1½"	.082"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	11,200	SE17APBH	●
1⅞"	.092"	Galv	Diamond	Sencote	15° Flat Wire Welded Coil	3600	EL20AABH	●
2¼"	.092"	Galv	Diamond	Sencote	15° Flat Wire Welded Coil	3600	EL23AABH	●
1¾"	.092"	Hot Dip	Diamond	Sencote	15° Flat Wire Welded Coil	3600	EL19ASBH	●
1⅞"	.092"	Hot Dip	Diamond	Sencote	15° Flat Wire Welded Coil	3600	EL20ASBH	●
2"	.092"	Hot Dip	Diamond	Sencote	15° Flat Wire Welded Coil	3600	EL21ASBH	●
2¼"	.092"	Hot Dip	Diamond	Sencote	15° Flat Wire Welded Coil	3600	EL23ASBH	●
1¾"	.092"	Stainless 304	Diamond	Sencote	15° Flat Wire Welded Coil	3600	EL19AGBH	●
2"	.092"	Stainless 304	Diamond	Sencote	15° Flat Wire Welded Coil	3600	EL21AGBH	●
2¼"	.092"	Stainless 304	Diamond	Sencote	15° Flat Wire Welded Coil	3600	EL23AGBH	●

PALLETPRO™57FXP

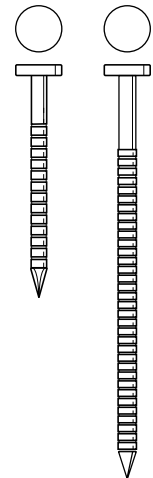


.082", .092"
1¼" - 2¼"



RING SHANK COIL NAILS

PALLETS, FRAMING, SHEATHING, SUBFLOOR, DECKS & TRUSSES								
Length	Diameter	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
2"	.099"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	6600	BL21APBF	
2"	.113"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	6000	GL21APBF	●
2 3⁄8"	.113"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	6000	GL24APBF	●
2 1⁄4"	.099"	Galv	Diamond	Sencote	15° Flat Wire Welded Coil	6600	BE23AABF	●
2 3⁄8"	.113"	Hot Dip	Diamond	Sencote	15° Flat Wire Welded Coil	2700	GL24ASBF	●
3"	.120"	Hot Dip	Diamond	Sencote	15° Flat Wire Welded Coil	2400	HL27ASBF	● ●
2 3⁄8"	.113"	Stainless 304	Diamond	Sencote	15° Flat Wire Welded Coil	2700	GL24AGBF	● ●
								● ●
								PALLETPRO™100XP
								PALLETPRO™130XP

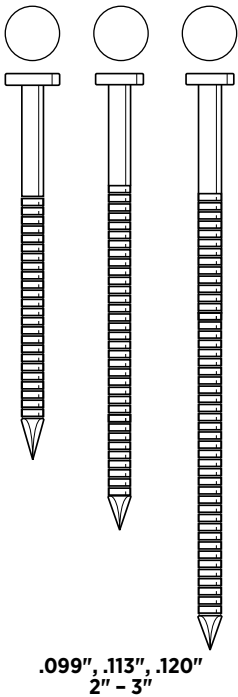


.099", .113", .120"
2" - 3"



RING SHANK NAILS

SUPERIOR FASTENING IN SUBFLOOR APPLICATIONS								
Length	Diameter	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
2"	.099"	Bright Basic	Diamond	Sencote	150 Flat Wire Welded Coil	6600	BT21APBF	
2 3⁄8"	.113"	Bright Basic	Diamond	Sencote	150 Flat Wire Welded Coil	4000	GT24APBF	●
2 1⁄2"	.131"	Bright Basic	Diamond	Sencote	150 Flat Wire Welded Coil	4000	KT25APBF	●
								●
								PALLETPRO™100XP

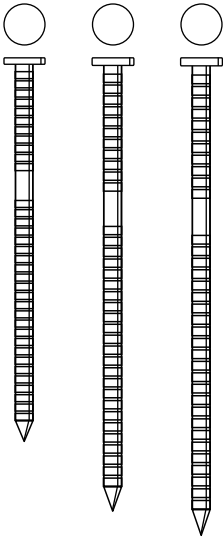

.099", .113", .131"
2" - 2 1⁄2"


15⁰
COIL

SCREW SHANK COIL NAILS

PALLETS, FRAMING, SHEATHING, SUBFLOOR, DECKS & TRUSSES

Length	Diameter	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
2"	.099"	Bright	Blunt Dia.	Sencote	15° Flat Wire Welded Coil	9000	BK21BPBFN	
2¼"	.099"	Bright	Blunt Dia.	Sencote	15° Flat Wire Welded Coil	9000	BK23BPBFN	●
2½"	.099"	Bright	Blunt Dia.	Sencote	15° Flat Wire Welded Coil	6000	BK25BPBFN	●
3"	.120"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	4000	HK27APBFN	● ●

PALETPRO™100XP
PALETPRO™130XP

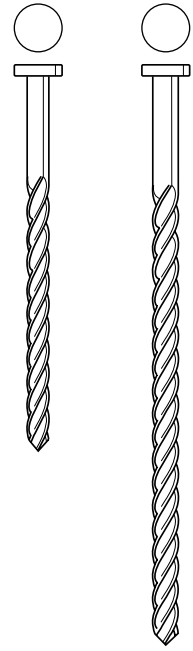

.099" - .120"
2" - 3"


20^{GA}
F

½" CROWN FINE WIRE STAPLES

PACKAGING, SET-UP BOXES & BEDDING

Length	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
¾"	Galv	Chisel	Sencote	Glued Strip	10,000	F06BAA	●
¾"	Galv	Chisel	Sencote	Glued Strip	24,000	F06BAAP	●
½"	Galv	Chisel	Sencote	Glued Strip	10,000	F08BAAN	●
½"	Galv	Chisel	Sencote	Glued Strip	15,000	F08BAAP	●
⅝"	Galv	Chisel	Sencote	Glued Strip	24,000	F05BAAP	●
¾"	Stainless 304	Chisel	Sencote	Glued Strip	10,000	F06BGA	●

DFPXP



⅝" - ½"


18^{GA}
J

⅞" CROWN FINE WIRE STAPLES

PACKAGING, SET-UP BOXES & BEDDING

Length	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
½"	Galv	Chisel	Plain	Glued Strip	5000	J08BAAN	● ●
⅝"	Galv	Chisel	Plain	Glued Strip	5000	J10BAAN	● ●

F75LXP
F75SXP




½" - ⅝"

14^{GA}
CARTON

1¼" CROWN CARTON CLOSING STAPLES

CORRUGATED CONTAINERS

Length	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
⅝"	Liquor	Chisel	Plain	Glued Strip	2000	U10BCA	
¾"	Liquor	Chisel	Plain	Glued Strip	2000	U11BCA	



⅝" - ¾"

UPHOLSTERY & FURNITURE

SENCO HAS YOU COVERED

SENCO offers a range of fine and medium wire staplers for upholstery and furniture assembly. Our upholstery staplers are the most customizable in the industry, with long nosepieces, extended magazines and a wide range of fasteners for any project.

APPLICATIONS

Upholstery, furniture assembly, cabinets, bedding, picture frames, molding, roof felt, house wrap, RV construction.

KEY FEATURES

- Lightweight
- Ergonomic
- Variety of configurations



SFW09XP

SFT10XP

3/16", 3/8", 1/2" CROWN, 5/8" FINE WIRE STAPLERS



TOOL OVERVIEW

- Standard nose & magazine
- Multiple versions - see table below
- Rear exhaust directs oil away from the work surface
- One-handed magazine release for quick & easy reloading
- Slender design for an improved line of sight

APPLICATIONS


Upholstery, cabinets, molding, furniture assembly

SFT10XP:

CROWN	GA	STAPLE	DESCRIPTION	ITEM #
3/16"	22	A/D Wire	Standard	6S0001N
3/16"	22	A/D Wire	Auto	6S0101N
1/2"	22	B Wire	Standard	6S0011N
3/8"	22	C Wire	Standard	6S0021N
3/8"	22	C Wire	Auto	6S0121N
3/16"	20	E Wire	Standard	6S0031N
1/2"	20	F Wire	Standard	6S0041N
3/8"	20	G Wire	Standard	6S0051N

SFT10XP - DOUBLE LENGTH MAGAZINE

3/8", 7/16", 1/2" CROWN, 5/8" FINE WIRE STAPLERS

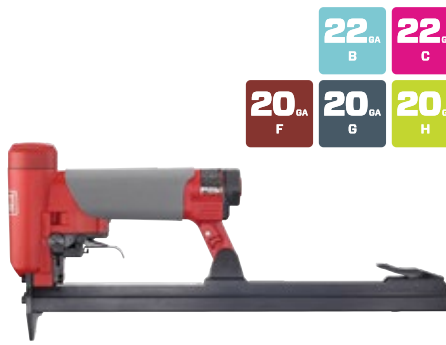

TOOL OVERVIEW

- Standard nose, double length magazine
- Multiple versions - see table below
- Rear exhaust directs oil away from the work surface
- One-handed magazine release for quick & easy reloading
- Slender design for an improved line of sight

APPLICATIONS

Upholstery, cabinets, molding, furniture assembly

SFT10XP W/ DOUBLE LENGTH MAGAZINE:

CROWN	GA	STAPLE	DESCRIPTION	ITEM #
1/2"	22	B Wire	Auto	6S0311N
3/8"	22	C Wire	Standard	6S0221N
3/8"	22	C Wire	Auto	6S0321N
1/2"	20	F Wire	Auto	6S0341N
3/8"	20	G Wire	Standard	6S0251N
7/16"	20	H Wire	Auto	6S0361N

SFT10XP - LONG NOSE

3/8" CROWN, 5/8" FINE WIRE STAPLER



TOOL OVERVIEW

- Long nose, standard magazine version - see table below
- Rear exhaust directs oil away from the work surface
- One-handed magazine release for quick & easy reloading
- Slender design for an improved line of sight

APPLICATIONS

Upholstery, furniture assembly

SFT10XP WITH LONG NOSE:

CROWN	GA	STAPLE	DESCRIPTION	ITEM #
3/8"	22	C Wire	Standard	6S0421N

TOOL SPECIFICATIONS

MODEL NAME ITEM #	SFT10XP ITEM # ABOVE	SFT10XP - DBL. LENGTH MAG. ITEM # ABOVE	SFT10XP - LONG NOSE ITEM # ABOVE
Trigger	Sequential or Auto	Sequential or Auto	Sequential
Operating Pressure	60-95 psi (4.1-6.5 bar)	60-95 psi (4.1-6.5 bar)	60-95 psi (4.1-6.5 bar)
Air Consumption (60 CPM)	.77 scfm	.77 scfm	.77 scfm
Air Inlet	1/4" NPT	1/4" NPT	1/4" NPT
Weight	2.1 lbs (0.955 kg)	2.1 lbs (0.955 kg)	2.1 lbs (0.955 kg)
Height	6.57" (167 mm)	6.57" (167 mm)	8.15" (207 mm)
Length	8.58" (218 mm)	14.80" (376 mm)	8.58" (218 mm)
Width	1.65" (42 mm)	1.65" (42 mm)	1.65" (42 mm)
Main Body Material	Aluminum	Aluminum	Aluminum
Warranty	5 yrs	5 yrs	5 yrs
FASTENERS			
FASTENERS ARE LOCATED ON PAGES 61-62			
Gauge	22, 20	22, 20	22
Crown	3/16", 3/8", 1/2"	3/8", 7/16", 1/2"	3/8"
Range	1/4"-5/8"	1/4"-5/8"	1/4"-5/8"
Capacity	180 (22 GA)/120 (20 GA)	360 (22 GA)/240 (20 GA)	180
Angle/Collation	Straight Glued Strip	Straight Glued Strip	Straight Glued Strip

SFW09

22 GA. 3/8" CROWN, 5/8" UPHOLSTERY STAPLER



22
GA
C

TOOL OVERVIEW

- Drives 22 GA. 3/8" crown staples 3/8" to 5/8" in length
- Long 1" lip makes getting into tight spots easier
- Ultra-lightweight for ease of use & maneuverability
- Rear exhaust keeps oil off fabric
- Rounded steel cap that won't snag fabric

APPLICATIONS

Upholstery, cabinets, molding, furniture assembly

NS20BXP

16 GA. 7/16" CROWN, 2" CONSTRUCTION STAPLER



16
GA
N

TOOL OVERVIEW

- Drives 16 & 17 GA. 7/16" crown staples 1" to 2" in length
- 14 staple per second multidirectional stitching
- Quick clear latch to easily clear jams or misfeeds
- Drive track eliminates unwanted movement of staple, enhancing overall drive performance

APPLICATIONS

Sheathing, furniture framing, crate & box assembly, subflooring, pallets, roof decking, fascia, cedar shingles

SNS45XP

16 GA. 7/16" CROWN, 2" CONSTRUCTION STAPLER



16
GA
N

TOOL OVERVIEW

- Drives 16 GA. 7/16" crown staples 1" to 2" in length
- Fast-up to 15 staples per second
- Quick clear latch to easily clear jams or misfeeds
- Tool-free depth adjustment for consistent flush or countersunk drives

APPLICATIONS

On-site & manufactured housing, roof & floor decking, sheathing, subflooring, fascia & soffits, lathing, fencing & cedar shingles, furniture frames, boxes, crates, pallets & pallet repair

SNS50XP

16 GA. 7/16" CROWN, 2" CONSTRUCTION STAPLER



16
GA
N

TOOL OVERVIEW

- Drives 16 GA. 7/16" crown staples 1 1/4" to 2" in length
- Fast-up to 15 staples per second
- Quick clear latch to easily clear jams or misfeeds
- Tool-free depth adjustment for consistent flush or countersunk drives

APPLICATIONS

Framing, sheathing, subflooring, crate & box assembly, pallets & pallet repair

TOOL SPECIFICATIONS


MODEL NAME ITEM #	SFW09 4C0001N	NS20BXP 9Y0001N	SNS45XP 580101N	SNS50XP 750101N
Trigger	Dual	Contact	Contact	Contact
Operating Pressure	60-95 psi (4.1-6.5 bar)	70-120 psi (4.8-8.3 bar)	80-120 psi (5.5 - 8.3 bar)	80-120 psi (5.5 - 8.3 bar)
Air Consumption (60 CPM)	.77 scfm	3.98 scfm	5.52 scfm	6.54 scfm
Air Inlet	1/4" NPT	3/8" NPT	3/8" NPT	3/8" NPT
Weight	2.1 lbs (0.955 kg)	5.8 lbs (2.6 kg)	5.1 lbs (2.3 kg)	5.9 lbs (2.7 kg)
Height	6" (152 mm)	11" (279 mm)	11" (279 mm)	12" (305 mm)
Length	9.25" (235 mm)	15" (381 mm)	14" (356 mm)	14.38" (365 mm)
Width	1.63" (41 mm)	4" (102 mm)	3.5" (89 mm)	3.6" (92 mm)
Main Body Material	Aluminum	Aluminum	Aluminum	Aluminum
Warranty	5 yrs	5 yrs	5 yrs	5 yrs
FASTENERS	FASTENERS ARE LOCATED ON PAGES 61, 63			
Gauge	22	16	16	16
Crown	3/8"	7/16"	7/16"	7/16"
Range	5/32"-5/8"	1"-2"	1"-2"	1 1/4"-2"
Capacity	110-168	160	160	160
Angle/Collation	Straight Glued Strip	Straight Glued/Taped Strip	Straight Glued/Taped Strip	Straight Glued/Taped Strip

22^{GA}
A/D**3/16" CROWN FINE WIRE STAPLES**

FURNITURE, UPHOLSTERY, FELT, INSULATION, CASEBACKS, SCREENING & SHOES

Length	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
1/4"	Galv	Chisel	Sencote	Straight Glued Strip	10,000	A04BAAN	●
3/8"	Galv	Chisel	Sencote	Straight Glued Strip	30,000	A06BABN	●
3/8"	Galv	Chisel	Sencote	Straight Glued Strip	40,000	A06BABP	●
1/2"	Galv	Chisel	Sencote	Straight Glued Strip	20,000	A08BAB	●
1/2"	Galv	Chisel	Sencote	Straight Glued Strip	30,000	A08BABP	●
5/8"	Galv	Chisel	Sencote	Straight Glued Strip	20,000	D10BABN	●
5/8"	Galv	Chisel	Sencote	Straight Glued Strip	23,000	D10BABPN	●


SFT10XP-A/D

22^{GA}
B**1/2" CROWN FINE WIRE STAPLES**

FURNITURE, UPHOLSTERY, FELT, INSULATION, CASEBACKS, SCREENING & SHOES

Length	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
1/4"	Plain	Chisel	Galv	Straight Glued Strip	25,000	B04BAAPN	●
3/8"	Plain	Chisel	Galv	Straight Glued Strip	40,000	B06BAAP	●
1/2"	Plain	Chisel	Galv	Straight Glued Strip	25,000	B08BAAP	●


SFT10XP-B

22^{GA}
C**3/8" CROWN FINE WIRE STAPLES**

FURNITURE, UPHOLSTERY, FELT, INSULATION, CASEBACKS, SCREENING & SHOES

Length	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
5/32"	Chisel	Plain	Galv	Straight Glued Strip	60,000	C02BAAPN	●
3/16"	Chisel	Plain	Galv	Straight Glued Strip	55,000	C03BAAPN	●
1/4"	Chisel	Plain	Galv	Straight Glued Strip	35,000	C04BAAP	● ●
1/4"	Chisel	Plain	Galv	Straight Glued Strip	5000	C04BAAR	● ●
5/16"	Chisel	Plain	Galv	Straight Glued Strip	28,000	C05BAAPN	● ●
3/8"	Chisel	Plain	Galv	Straight Glued Strip	50,000	C06BAAP	● ●
3/8"	Chisel	Plain	Galv	Straight Glued Strip	5000	C06BAAR	● ●
7/16"	Chisel	Plain	Galv	Straight Glued Strip	40,000	C07BAAPN	● ●
1/2"	Chisel	Plain	Galv	Straight Glued Strip	35,000	C08BAAP	● ●
1/2"	Chisel	Plain	Galv	Straight Glued Strip	5000	C08BAAR	● ●
5/8"	Chisel	Plain	Galv	Straight Glued Strip	27,000	C10BAAP	● ●
5/8"	Chisel	Plain	Galv	Straight Glued Strip	5000	C10BAAR	● ●
3/16"	Chisel	Plain	Stainless 304	Straight Glued Strip	25,000	C03BGAN	● ●
1/4"	Chisel	Plain	Stainless 304	Straight Glued Strip	25,000	C04BGAN	● ●
3/8"	Chisel	Plain	Stainless 304*	Straight Glued Strip	10,000	C06BHA	● ●
3/8"	Chisel	Plain	Stainless 304	Straight Glued Strip	10,000	C06BGA	● ●

*High-tensile 304 Stainless Steel

SFW09
SFT10XP-C21^{GA}
W**3/16" CROWN FINE WIRE STAPLES**

FURNITURE, UPHOLSTERY, FELT, INSULATION, CASEBACKS, SCREENING & SHOES


Length	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
5/8"	Galv	Chisel	Sencote	Straight Glued Strip	10,000	W10BAB	



20^{GA}
E

3/16" CROWN FINE WIRE STAPLES


FURNITURE UPHOLSTERY, FELT, INSULATION, CASEBACKS, SCREENING & SHOES							
Length	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
3/8"	Galv	Chisel	Plain	Straight Glued Strip	10,000	E06BAA	●
1/2"	Galv	Chisel	Plain	Straight Glued Strip	10,000	E08BAA	●
5/8"	Galv	Chisel	Plain	Straight Glued Strip	5000	E10BAA	●
							SFT10XP-E



20^{GA}
F

1/2" CROWN FINE WIRE STAPLES


UPHOLSTERY, FELT, INSULATION & CASEBACKS							
Length	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
1/4"	Galv	Chisel	Plain	Straight Glued Strip	10,000	F04BAAN	●
1/4"	Galv	Chisel	Plain	Straight Glued Strip	17,000	F04BAAP	●
5/16"	Galv	Chisel	Plain	Straight Glued Strip	24,000	F05BAAP	●
3/8"	Galv	Chisel	Plain	Straight Glued Strip	10,000	F06BAA	●
3/8"	Galv	Chisel	Plain	Straight Glued Strip	24,000	F06BAAP	●
1/2"	Galv	Chisel	Plain	Straight Glued Strip	10,000	F08BAAN	●
1/2"	Galv	Chisel	Plain	Straight Glued Strip	15,000	F08BAAP	●
3/8"	Stainless 304	Chisel	Plain	Straight Glued Strip	10,000	F06BGA	●
							SFT10XP-F



20^{GA}
G

3/8" CROWN FINE WIRE STAPLES

UPHOLSTERY, FELT, INSULATION & CASEBACKS							
Length	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
1/4"	Galv	Chisel	Plain	Straight Glued Strip	10,000	G04BAAN	●
3/8"	Galv	Chisel	Plain	Straight Glued Strip	5000	G06BABN	●
1/2"	Galv	Chisel	Plain	Straight Glued Strip	5000	G08BAB	●
							SFT10XP-G



20^{GA}
H

7/16" CROWN FINE WIRE STAPLES

UPHOLSTERY, FELT, INSULATION & CASEBACKS							
Length	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
3/8"	Galv	Chisel	Plain	Straight Glued Strip	2000	H06BAAPR	●
3/8"	Galv	Chisel	Plain	Straight Glued Strip	5000	H06BAA	●
							SFT10XP-H




7/16" CROWN HEAVY WIRE STAPLES

CABINETS, CASEBACKS, DRAWERS, UPHOLSTERY, SOFFITS, UNDERLAYMENT, LATTICE & SHEATHING

Length	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
1 1/8"	Bright	Chisel	Sencote	Taped	10,000	N14BRB	● ●
1 1/4"	Bright	Chisel	Sencote	Taped	10,000	N15BRB	● ● ●
1 3/8"	Bright	Chisel	Sencote	Taped	10,000	N16BRB	● ● ●
1 1/2"	Bright	Chisel	Sencote	Taped	10,000	N17BRB	● ● ●
1 5/8"	Bright	Chisel	Sencote	Taped	10,000	N18BRB	● ● ●
1 3/4"	Bright	Chisel	Sencote	Taped	10,000	N19BRB	● ● ●
2"	Bright	Chisel	Sencote	Taped	10,000	N21BRB	● ● ●
1 1/2"	Galv	Chisel	Sencote	Glued	5000	N08BABN	
3/4"	Galv	Chisel	Sencote	Glued	5000	N11BAB	
7/8"	Galv	Chisel	Sencote	Glued	5000	N12BABN	
7/8"	Galv	Diverg	Sencote	Glued	5000	N12FABN	
1"	Galv	Chisel	Sencote	Glued	5000	N13BAB	● ●
1"	Galv	Diverg	Sencote	Glued	5000	N13FAB	● ●
1 1/8"	Galv	Chisel	Sencote	Taped	10,000	N14BAB	● ●
1 1/4"	Galv	Chisel	Sencote	Taped	10,000	N15BAB	● ● ●
1 3/8"	Galv	Chisel	Sencote	Taped	10,000	N16BAB	● ● ●
1 1/2"	Galv	Chisel	Sencote	Taped	10,000	N17BAB	● ● ●
1 5/8"	Galv	Chisel	Sencote	Taped	10,000	N18BAB	● ● ●
1 3/4"	Galv	Chisel	Sencote	Taped	10,000	N19BAB	● ● ●
2"	Galv	Chisel	Sencote	Taped	10,000	N21BAB	● ● ●
1 1/2"	Galv*	Chisel	Sencote	Glued	5000	N08BBBN	
1 1/2"	Galv*	Diverg	Sencote	Glued	5000	N08FBBN	
5/8"	Galv*	Chisel	Sencote	Glued	5000	N10BAB	
3/4"	Galv*	Diverg	Sencote	Glued	5000	N11FBB	
1 1/2"	Stainless 304	Chisel	Sencote	Glued	3000	N17BGB	● ● ●
1 3/4"	Stainless 304	Chisel	Sencote	Glued	3000	N19BGBN	● ● ●
2"	Stainless 304	Chisel	Sencote	Glued	3000	N21BGBN	● ● ●

*Galvanized high-tensile steel

NS20BXP
SNS45XP
SNS50XP





SHF200

FLOORING

HARDWOOD FLOORING DONE RIGHT

Hardwood floors aren't so hard to install with our SHF200 stand-up flooring tool. With a long, ergonomic handle and a base that easily adjusts to any floor thickness you will get your job done in no time.

APPLICATIONS

Hardwood and laminate flooring.

KEY FEATURES

- Mallet actuated pneumatic hardwood flooring nailer provides consistent driving power for a flush, professional-quality installation
- Tongue-and-groove stapler drives 45° angle staples to eliminate tongue splitting and floor surface damage

SHF200

2" PNEUMATIC Mallet ACTUATED HARDWOOD FLOORING NAILER



TOOL OVERVIEW

- Drives 16 GA. cleat nails ½" to 2" in length
- Innovative non-marring base adjusts between ½" & ¾" flooring without the use of tools

APPLICATIONS

Hardwood Flooring

SLS20XP-HF

19 GA. ⅜" CROWN, 1" HARDWOOD & LAMINATE FLOOR STAPLER



TOOL OVERVIEW

- Drives 19 GA. ⅜" crown staples ⅝" to 1" in length
- Never-Lube® design indicates maintenance-free operation, eliminating the risk of oil spillover onto the work surface
- Front block easily adjusts to floor thickness

APPLICATIONS

Hardwood Flooring

TOOL SPECIFICATIONS

MODEL NAME ITEM #	SHF200 8D0001N	SLS20XP-HF 490021N
Trigger	Sequential	Sequential
Operating Pressure	90–110 psi (6.2–7.6 bar)	70–120 psi (4.8–8.3 bar)
Air Consumption (60 CPM)	2.52 scfm	1.92 scfm
Air Inlet	¼" NPT	¼" NPT
Weight	10.1 lbs (4.58 kg)	3.2 lbs (1.5 kg)
Height	21.5" (546 mm)	9" (228 mm)
Length	17.8" (452 mm)	13" (332 mm)
Width	3.1" (78 mm)	3" (76 mm)
Main Body Material	Aluminum	Aluminum
Warranty	5 yrs	5 yrs
FASTENERS	FASTENERS BELOW	
Gauge	16	19
Crown	L-Head	⅜"
Range	1½"–2"	⅝"–1"
Capacity	107	168
Angle/Collation	Straight Glued Strip	Straight Glued Strip




L-HEAD FLOORING CLEAT NAILS

½", ⅝", ¾", ⅜", 33/32" SOLID HARDWOOD FLOORING

Length	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
1½"	Bright	Blunt Diamond	N/A	Straight Glued Strip	1000	RW17BPE	●
1¾"	Bright	Blunt Diamond	N/A	Straight Glued Strip	1000	RW19BPE	●
2"	Bright	Blunt Diamond	N/A	Straight Glued Strip	1000	RW21BPE	●

SHF200



1½" - 2"




⅜" CROWN FLOORING STAPLES

¼", ⅝", ¾", ⅜" ENGINEERED & HARDWOOD FLOORS

Length	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
⅝"	Galv	Chisel	Sencote	Straight Glued Strip	5000	R10BAB	●
¾"	Galv	Chisel	Sencote	Straight Glued Strip	5000	R11BAB	●
1"	Galv	Chisel	Sencote	Straight Glued Strip	5000	R13BAB	●

SLS20XP-HF



⅝" - 1"

AIR COMPRESSORS & KITS

THE INNOVATION YOU EXPECT, THE QUALITY YOU ALREADY KNOW

SENCO has you covered with industry leading compressors that provide plenty of tank storage and air flow for the job site or professional shop.

Many feature an oil-free pump design to reduce maintenance and have integrated panels that provide easy access to control knobs. There's even a compressor equipped with dual couplers so you can run two hoses simultaneously.

Count on quickly getting back to work – we offer compressors that have pump up times of less than 40 seconds. You can easily monitor output pressure with individual tank and outlet gauges. A full line of hoses and accessories is also available.



PC1010

PC1131

2 HP, 4.3 GAL. TWIN TANK AIR COMPRESSOR

**OVERVIEW**

- Cast iron cylinder for longer pump life
- Compact twin-stack tank design
- Direct drive pump & heavy duty induction motor for efficient operation

APPLICATIONS

Framing & sheathing, roofing & decking, finish & trim

PC0968

1 HP, 2½ GAL. TWIN TANK FINISH & TRIM AIR COMPRESSOR

**OVERVIEW**

- 200 Max psi
- Induction motor for extended life operation
- Oil-free pump for maintenance free operation

APPLICATIONS

Framing & sheathing, roofing & decking, finish & trim

PC1280

1½ HP, 6 GAL. PANCAKE AIR COMPRESSOR

**OVERVIEW**

- Compact & balanced pancake tank design
- Lightweight at only 38 lbs
- Dual couplers allow you to run 2 hoses simultaneously
- Draws only 12 amps

APPLICATIONS

Finish & trim

PC1010

½ HP, 1 GAL. FINISH & TRIM AIR COMPRESSOR

**OVERVIEW**

- Ultra-quiet motor runs at 68 dBA
- 20 lbs for optimal portability
- Oil-free pump for maintenance free operation

APPLICATIONS

Finish & trim

PC1010N

½ HP, 1 GAL. FINISH & TRIM AIR COMPRESSOR

**OVERVIEW**

- Ultra-quiet motor runs at 68 dBA
- 21 lbs for optimal portability
- Oil-free pump for maintenance free operation

APPLICATIONS

Finish & trim

PC0947

2" 18 GA. BN31MIP BRAD NAILER & PC1010 COMPRESSOR KIT

**OVERVIEW**

- BN31MIP Nailer drives 18- GA. finish nails 5/8" to 2½" in length
- PC1010 motor runs at 68 dBA
- Includes hose, fasteners & safety glasses

APPLICATIONS

Finish & trim

AIR COMPRESSOR SPECIFICATIONS

MODEL NAME ITEM #	PC1131	PC0968	PC1280	PC1010	PC1010N
Motor	Induction	Induction	Universal	Induction	Induction
Amps	14	8	12	4	4
Power Source	115 Volts	115 Volts	115 Volts	115 Volts	115 Volts
SCFM @ 90 PSI	4.4	2.2	2.8	0.7	0.7
Max PSI	125	135	150	135	135
Weight	60 lbs (27 kg)	38 lbs (17.24 kg)	38 lbs (17.24 kg)	20 lbs (9.07 kg)	21 lbs (9.53 kg)
Height	14.5" (368 mm)	13.5" (343 mm)	18" (457 mm)	13" (330 mm)	12.25" (311 mm)
Length	20.5" (521 mm)	16" (406 mm)	17" (432 mm)	14" (356 mm)	11.5" (292 mm)
Width	16.5" (419 mm)	15" (381 mm)	16.3" (414 mm)	10" (254 mm)	14" (356 mm)
Warranty	1 yr	1 yr	1 yr	1 yr	1 yr
FEATURES					
Thermal Overload Protector	Yes	Yes	Yes	Yes	Yes
Pump	Oil-Lube	Oil-Free	Oil-Free	Oil-Free	Oil-Free
Pump Up/Recovery Time	67 sec./16 sec.	82 sec./17 sec.	152 sec./33 sec.	125 sec./30 sec.	125 sec./30 sec.
¾" Quick Connect Coupler	1	1	2 (Dual)	1	1

KIT SPECIFICATIONS

MODEL NAME ITEM #	PC0947
Compressor	PC1010
Tool	BN31MIP
Trigger	Selectable
Tool Oper. Pressure	70-120 psi
Tool Air Inlet	¼" NPT
Tool Weight	3 lbs (1.4 kg)
Tool Height	9.75" (248 mm)
Tool Length	10.5" (267 mm)
Kit Warranty	1 yr/5 yr
Coil Hose	¼" x 25'
Air Fittings	Yes
Tool Oil & Safety Glasses	Yes
Variety Pack of Fasteners	Yes

SMARTLOAD AUTOMATION

MOUNTED FRAMING MADE SIMPLE

Fastening solutions that are purpose-built for automated assembly, with extended fastener capacity, reload indicators and a range of remote fire trigger and fastener options. Introducing SENCO's SmartLoad lineup – from the leader in power fastening technology.

WHY WE'RE THE EXPERTS

Our tools, accessories and fasteners have been improving the speed and consistency of manufacturing lines for decades. Moving to automated production? We're ready to help.

APPLICATIONS

Mounted framing, subfloor, wall sheathing, pallets, crating, wall panels, drywall.

KEY FEATURES

- Off-the-shelf framing nailers, coil nailers, collated screwdrivers, triggers and fasteners specifically designed for automation systems
- Dependable fastening performance for machine-driven, high-volume assembly of walls, floors, roofs and other wood construction
- Mount easily to most popular bridge systems



SCN65XP-SL

FRAMEPRO®751XP-SL SERIES

3½" 30° MOUNTED FRAMING NAILER



30°

TOOL OVERVIEW

- Drives 30° paper taped framing nails 2" to 3½" in length
- 2X capacity magazine
- Mechanical reload indicator/lock out
- Drives up to 8 nails per second
- Custom configurations - see table for details*

APPLICATIONS

Mounted framing

FRAMEPRO®752XP-SL SERIES

3½" 21° MOUNTED FRAMING NAILER



21°

TOOL OVERVIEW

- Drives 21° plastic collated framing nails 2" to 3½" in length
- 2X capacity magazine
- Mechanical reload indicator/lock out
- Drives up to 8 nails per second
- Custom configurations - see table for details**

APPLICATIONS

Mounted framing

SCN65XP-SL

15° 3½" MOUNTED COIL NAILER



15°
COIL

TOOL OVERVIEW

- Drives 15° flat wire welded coil nails 2" to 3½" in length
- High capacity stainless steel tray holds up to 1000-nail coils
- E-Z load design for quick nail loading & less downtime
- Drives up to 9 nails per second
- Includes positive remote fire trigger

APPLICATIONS

Mounted fastening of subfloor, wall sheathing, pallets, crating & framing

*FRAMEPRO®751XP-SL OPTIONS

TRIGGER TYPES:	MAGAZINE CAPACITY:	RELOAD INDICATORS:
Standard D/A	Standard (Capacity 70)	Pneumatic
Standard Rest	2-Strip (Capacity 92)	Electronic (PNP)
Internal Remote	Extended (Capacity 162)	Electronic (NPN)
External Remote		



STANDARD SAFETY MECHANISM

**FRAMEPRO®752XP-SL OPTIONS

TRIGGER TYPES:	MAGAZINE CAPACITY:	RELOAD INDICATORS:
Standard D/A	Standard (Capacity 60)	Pneumatic
Standard Rest	Extended (Capacity 120)	Electronic (PNP)
Internal Remote		Electronic (NPN)
External Remote		



PNEUMATIC RELOAD INDICATOR



ELECTRONIC RELOAD INDICATOR

TOOL SPECIFICATIONS

MODEL NAME ITEM #	FRAMEPRO®751XP-SL ITEM # VARIES	FRAMEPRO®752XP-SL ITEM # VARIES	SCN65XP-SL 540160N
Trigger	Sequential	Sequential	Contact
Operating Pressure	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)
Air Consumption (60 CPM)	11 scfm	11 scfm	9.54 scfm
Air Inlet	⅜" NPT	⅜" NPT	⅜" NPT
Weight	10.3 lbs (4.7 kg)	10.5 lbs (4.7 kg)	10.3 lbs (4.7 kg)
Height	18.9" (480 mm)	14.785" (375.5 mm)	18.9" (480 mm)
Length	4.4" (112 mm)	36.855" (936.1 mm)	26.8" (681 mm)
Width	11" (280 mm)	4.488" (113.9 mm)	4.4" (112 mm)
Main Body Material	Aluminum	Aluminum	Aluminum
FASTENERS	FASTENERS ARE LOCATED ON PAGES 38-41		FASTENERS ON PAGE 42-43, 71
Range	2"-3½"	2"-3½"	2"-3½"
Diameter	.113"-.148"	.120"-.162"	.099"-.131"
Capacity	70	60	225-275
Angle/Collation	30-34° Angled Paper Tape Strip	20-21° Angled Plastic Strip	15° Flat Wire Welded Coil

POSITIVE REMOTE FIRE TRIGGERS

SENCO's new lineup of Positive Remote Fire Triggers are designed with simplicity & durability in mind. Suitable for all automated applications where a positive remote trigger is required.

- Routine, direct oiling is not necessary
- Include industrial grade air fittings & any required mounting hardware
- Passed grueling lab testing program of over 1 million cycles without failure
- Designed to require minimal air input ensuring reliable high speed operation

EXTERNAL TRIGGER ACTUATORS

Tool	Description	Cat. Pg. #	Item #
FramePro®701XP	3½" Paper Tape Framing Nailer	33	CA0191
FramePro®702XP	3½" Full Round Head Framing Nailer	34	
FramePro®751XP	3½" Paper Taped Framing Nailer	33	
FramePro®752XP	3½" Full Round Head Framing Nailer	34	



CA0191

EXTERNAL VALVE ACTUATORS

Tool	Description	Cat. Pg. #	Item #
SLS20XP-HF	⅜" Crown, 1" Hardwood & Laminate Floor Stapler	66	HA0362
SLS20XP-K	¼" Crown, 1½" Finish Stapler	22	
SLS20XP-L	¼" Crown, 1½" Finish Stapler	22	
SLS20XP-L SENCOMATIC	¼" Crown, 1½" Finish Stapler	22	
SLS20XP-M	⅜" Crown, 1½" Finish Stapler	22	
SLS20XP-R	⅜" Crown, 1½" Finish Stapler	22	
SLS25XP-L	¼" Crown, 1½" Finish Stapler	22	HA0363
SLS25XP-M	⅜" Crown, 1½" Finish Stapler	22	
SNS50XP	7⁄16" Crown, 2" Construction Stapler	39	
SQS55XP	7⁄16" Crown, 2½" Construction Stapler	39	HA0368
LS1XP	1" Headless Brad Nailer	19	
SLP20XP	1½" Brad Nailer	20	XA211
SFT10XP A/D-Wire Stapler	⅜" Crown, ⅝" Fine Wire Stapler	61	
SFT10XP B-Wire DL Stapler	½" Crown, ½" Fine Wire Stapler	61	
SFT10XP B-Wire Stapler	½" Crown, ½" Fine Wire Stapler	61	
SFT10XP C-Wire DL Stapler	⅜" Crown, ⅝" Fine Wire Stapler	61	
SFT10XP C-Wire LN Stapler	⅜" Crown, ⅝" Fine Wire Stapler	61	
SFT10XP C-Wire Stapler	⅜" Crown, ⅝" Fine Wire Stapler	61	
SFT10XP E-Wire Stapler	⅜" Crown, ⅝" Fine Wire Stapler	61	
SFT10XP F-Wire Stapler	½" Crown, ⅝" Fine Wire Stapler	61	
SFT10XP G-Wire DL Stapler	⅜" Crown, ⅝" Fine Wire Stapler	61	
SFT10XP G-Wire Stapler	⅜" Crown, ⅝" Fine Wire Stapler	61	



HA0362



HA0363



HA0368



XA211

INTERNAL TRIGGER ACTUATORS

Tool	Description	Cat. Pg. #	Item #
FramePro®701XP	3½" Paper Tape Framing Nailer	33	CA0193
FramePro®702XP	3½" Full Round Head Framing Nailer	34	
FramePro®751XP	3½" Paper Taped Framing Nailer	33	
FramePro®752XP	3½" Full Round Head Framing Nailer	34	
SCN60XP	2¾" Coil Nailer	35	CA0192
SCN65XP	3½" Coil Nailer	35	



CA0193



CA0192

15°
COIL

SMOOTH SHANK HIGH LOAD COIL NAILS

MOUNTED FASTENING OF SUBFLOOR, WALL SHEATHING, PALLETS, CRATING & FRAMING

Length	Diameter	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
2½"	0.131"	Bright	Diamond	Sencoat	15° Angled Wire Coil	2400	KD25APBP	●
3"	0.131"	Bright	Diamond	Sencoat	15° Angled Wire Coil	2400	KD27APBP	●


SCN65XP-SL



KD25APBP



KD27APBP



.131
2½" - 3"

15°
COIL

RING SHANK HIGH LOAD COIL NAILS

MOUNTED FASTENING OF SUBFLOOR, WALL SHEATHING, PALLETS, CRATING & FRAMING

Length	Diameter	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
2"	0.099"	Bright	Diamond	Sencoat	15° Angled Wire Coil	1000	BT21APBP	●
2⅜"	0.113"	Bright	Diamond	Sencoat	15° Angled Wire Coil	1000	GT24APBP	●


SCN65XP-SL



BT21APBP



GT24APBP



.099", .113
2" - 2⅜"

DS342-SL
120V 2500 RPM MOUNTED COLLATED SCREWDRIVER



TOOL OVERVIEW

- Includes DS342-AC screwdriver, screw spindle, bridge mount and strip guide system
- Drives high load collated screw strips
- Single connection point to fit various mounted applications
- Easy load screw strip guide
- Quick bit change
- Slim profile

APPLICATIONS

High load mounted applications including wall and floor panels

TOOL SPECIFICATIONS

MODEL NAME ITEM #	DS342-SL 10F1151N
Speed (RPM)	0-2500
Voltage	120V/60Hz
Current (Amps)	6.0
Weight	16.52 lbs (7.5 kg)
Height	26.6" (676 mm)
Length	22.4" (569 mm)
Width	6.8" (172 mm)
FASTENERS	FASTENERS ARE LOCATED ON PAGE 73
Range	1"-2" (Over 2" Special Order)
Shank Diameter	#6-#12
Collation	50 per Strip 500 per Spool





DRYWALL TO WOOD




#2 PHILLIPS



BUGLE



SHARP



Gauge	Length	Finish	Thread	Quantity	Item Code
6	1 1/4"	Gray Phosphate	Coarse	6 Boxes of 500/3000 Total	06A125PS
6	1 5/8"	Gray Phosphate	Coarse	6 Boxes of 500/3000 Total	06A162PS
7	2"	Gray Phosphate	Coarse	6 Boxes of 500/3000 Total	07A200PS



07A200PS



GYPSUM TO STEEL



#2 PHILLIPS



BUGLE



DRILL



Gauge	Length	Finish	Thread	Quantity	Item Code
6	1 1/4"	Clear Zinc	Fine	6 Boxes of 500/3000 Total	06C125CS
6	1 5/8"	Clear Zinc	Fine	6 Boxes of 500/3000 Total	06C162CS



06C125CS



WOOD TO WOOD




REX



FLAT



TYPE 17



Gauge	Length	Finish	Thread	Quantity	Item Code
8	1 1/4"	Yellow Zinc	Double	6 Boxes of 500/3000 Total	08F175YTS
8	2"	Yellow Zinc	Double	6 Boxes of 500/3000 Total	08F200YTS



DS342-SL

DS342-SL MACHINE MOUNTED COLLATED SCREW SYSTEMS:

- **VERSATILE 120V 2500 RPM SCREWDRIVER**
Drives a wide variety of screws, quick slide button for quick bit changes and tool free screw length adjustment
- **SINGLE CONNECTION POINT**
Easily mounts to multiple bridge/mounting systems
- **EXCLUSIVE FASTENER PACKAGING**
Screw strip mounts to spool arm directly through packaging, shipping box doubles as collection bin for expelled collated strip
- **STRIP GUIDE SYSTEM**
Simplifies screw reloading, prevents strip tangling, feeds empty strip to collection bin
- **SLIM PROFILE**
Tools nest closely together so multiple screwdrivers can be mounted on a single bridge
- **AC POWERED**
Tools use bridge electrical system to power screwdrivers on and off

ACCESSORIES

FILTERS, REGULATORS, LUBRICANTS, PLUGS, COUPLERS, HOSES, PARTS KITS & MORE

SENCO offers an assortment of accessories that are precision engineered to meet the demanding requirements of professionals. Be sure that your tools and compressors are running at peak performance by using SENCOR certified replacement parts, accessories, hoses, oils and lubricants.



VB0210,
VB0189

AIR HOSES

QUICK COUPLE RUBBER HOSE

SENCO'S PREMIUM AIR HOSES:

- Can handle up to 250 psi working pressure
- Oil-resistant nitrile tube
- Braided textile reinforcing for maximum strength & kink resistance
- Remains flexible at temperatures from -40° to 200°F
- 4-to-1 working pressure to burst safety factor
- Tough, flexible neoprene cover

Description	Hose Size	Length	Qty.	ITEM #
Gray with Industrial Interchange Plug & Coupler Fittings	1/4"	50 ft	1	PC0064
Gray with Industrial Interchange Plug & Coupler Fittings	1/4"	100 ft	1	PC1152
Gray with Industrial Interchange Plug & Coupler Fittings	3/8"	50 ft	1	PC0065



GRAY WITH PLUG & COUPLER
PC0064, PC1152,
PC0065

PROFLEX™ REINFORCED POLYURETHANE RED AIR HOSE

LIGHTEST AVAILABLE NON-MARRING FLEXIBLE HOSE

- Flexible in all weather (-48° to 150°F)
- Working pressure: 250 psi
- Durable – oil & fuel resistant
- MPT threaded ends

Description	Hose Size	Length	Qty.	ITEM #
ProFlex™ with MPT Ends (Use with FPT-Type Fittings)	1/4"	50 ft	1	PC0977
ProFlex™ with MPT Ends (Use with FPT-Type Fittings)	1/4"	100 ft	1	PC0978
ProFlex™ with MPT Ends (Use with FPT-Type Fittings)	3/8"	50 ft	1	PC0979



PROFLEX WITH MPT ENDS
PC0977, PC0978,
PC0979

PREMIUM HYBRID POLYMER AIR HOSE

- Provides the ultimate in flexibility & memory resistance, even in extreme cold
- Offers the best combination of strength & flexibility on the market

Description	Hose Size	Length	Qty.	ITEM #
Hybrid with MPT Ends (Use with FPT-Type Fittings)	1/4"	50 ft	1	PC1319
Hybrid with MPT Ends (Use with FPT-Type Fittings)	1/4"	100 ft	1	PC1320
Hybrid Field-Repairable with MPT Ends (Use with FPT-Type Fittings)	1/4"	50 ft	1	PC1321
Hybrid Field-Repairable with MPT Ends (Use with FPT-Type Fittings)	1/4"	100 ft	1	PC1322
Hybrid Field-Repairable with MPT Ends (Use with FPT-Type Fittings)	3/8"	50 ft	1	PC1339



HYBRID WITH MPT ENDS
PC1319, PC1320

FIELD REPAIRABLE END FITTING

- Field repairable hose ends are made with aircraft aluminum for easy on-site repair without hose clamps

Description	Hose Size	Qty.	ITEM #
Hybrid Hose Repair End Fitting	1/4"	1	PC1341
Hybrid Hose Repair End Fitting	3/8"	1	PC1337
Hybrid Hose Splicer	1/4"	1	PC1338
Hybrid Hose Splicer	3/8"	1	PC1340



HYBRID HOSE REPAIR END FITTING & HOSE SPLICER

PLUGS & COUPLERS

Quick connect plugs & couplers are available in the most popular Industrial Interchange styles. Couplers are also available in universal style.

UNIVERSAL COUPLERS — PUSH PLUG INTO COUPLER (NO NEED TO PULL BACK ON SLEEVE)

Type	Body Size	NPT Size	Pack Qty.	ITEM #
Female	1/4"	1/4" FPT	1	PC0900



**FEMALE COUPLER
PC0900**

PLUGS — INDUSTRIAL INTERCHANGE

Type	Body Size	Size	Pack Qty.	ITEM #
Male	1/4"	1/4" MPT	2	PC0479
Male	1/4"	3/8" MPT	2	PC0480
Female	1/4"	1/4" FPT	2	PC0477
Female	1/4"	3/8" FPT	2	PC0478
Push-on Barb	1/4"	1/4" LHB	1	PC0576
Push-on Barb	1/4"	3/8" LHB	1	PC0577



**MALE PLUG
PC0479,
PC0480**



**FEMALE PLUG
PC0477,
PC0478**

COUPLERS — INDUSTRIAL INTERCHANGE

Type	Body Size	Size	Pack Qty.	ITEM #
Male	1/4"	1/4" MPT	1	PC0503
Male	1/4"	3/8" MPT	1	PC0504
Female	1/4"	1/4" FPT	1	PC0501
Female	1/4"	3/8" FPT	1	PC0502
Push-on Barb	1/4"	1/4" LHB	1	PC0505
Push-on Barb	1/4"	3/8" LHB	1	PC0506



**PLUG
(PUSH-ON
LOCKING BARB)
PC0576, PC0577**



**MALE COUPLER
PC0503, PC0504**



**FEMALE COUPLER
PC0501, PC0502**



**COUPLER
(PUSH-ON
LOCKING BARB)
PC0505, PC0506**

SWIVEL PLUGS & SWIVEL COUPLERS

- Allow easier access when working in corners & tight spaces
- Help prevent kinks & reduce stress on hose
- Reduce fatigue
- Provide strong & simple connection for pneumatic tools

SWIVEL PLUGS — INDUSTRIAL INTERCHANGE

Type	Body Size	NPT Size	Pack Qty.	ITEM #
Male	1/4"	1/4" MPT	2	PC1323
Male	1/4"	3/8" MPT	2	PC1325



**MALE SWIVEL
PLUG
PC1323, PC1325**

SWIVEL PLUGS — INDUSTRIAL INTERCHANGE

Type	Body Size	NPT Size	Pack Qty.	ITEM #
Female	1/4"	1/4" FPT	1	PC1328



**FEMALE SWIVEL
COUPLER
PC1328**

SWIVEL COUPLERS — UNIVERSAL

Type	Body Size	NPT Size	Pack Qty.	ITEM #
Female	1/4"	1/4" FPT	1	PC1330



**FEMALE SWIVEL
COUPLER
PC1330**

(FPT) - Female Pipe Thread
(MPT) - Male Pipe Thread
(LHB) - Locking Hose Barb, no clamp required
when used with SENCO Quick Couple Hose

AIR HOSE ACCESSORIES

SPLICER

Description	Size	Pack Qty.	ITEM #
Push-On Barbed Hose Splicer	¼" LHB	2	PC0643



**PUSH-ON BARBED
HOSE SPLICER
PC0643**

PROFLEX™ HOSE FITTINGS

Description	Size	Pack Qty.	ITEM #
Brass Hose End	¼" MPT	1	PC0983
Brass Hose End & Splicer	¼" MPT	1	PC0987



**BRASS HOSE END
PC0983**



**BRASS HOSE END
& SPLICER
PC0987**

AIR HOSE & COMPRESSOR ACCESSORIES

TRIPOD MANIFOLD

Description	Inlet Thread	Outlet Thread	Pack Qty.	ITEM #
3-Way Flat Manifold Industrial Interchange	¼" Plug	¼" Coupler	1	PC1138



**3-WAY FLAT MANIFOLD
PC1138**

BLOW GUN

Description	Inlet Thread	Pack Qty.	ITEM #
Air Blow Gun	¼" FPT	1	PC0489



**AIR BLOW GUN
PC0489**

TEFLON® THREAD SEALING TAPE

Description	Pack Qty.	ITEM #
½" x 260' Sealing Tape	1	PC0349



**SEALING TAPE
PC0349**

REGULATORS & GAUGES

SENCO's assortment of filters & gauges are precision engineered to meet the demanding requirements of professional contractors. Be sure that your compressor is running at peak performance by using SENCO-certified replacement parts & accessories.

AIR REGULATION ACCESSORIES: REGULATOR WITH GAUGE

Description	Max PSI	Max Airflow	FPT Size	NPT Gauge	ITEM #
Mini Regulator with Gauge	250	14 SCFM	¼"	⅛"	PC0656
Regulator with Gauge	300	80 SCFM	⅜"	⅛"	PC0657
Back-Mount Pressure Gauge	160	—	—	⅛"	PC0057
Back-Mount Pressure Gauge	160	—	—	¼"	PC0051



**MINI REGULATOR
WITH GAUGE
PC0656**



**REGULATOR
WITH GAUGE
PC0657**



**BACK-MOUNT
PRESSURE
GAUGE
PC0057**



**BACK-MOUNT
PRESSURE
GAUGE
PC0051**

(FPT) - Female Pipe Thread
(MPT) - Male Pipe Thread
(LHB) - Locking Hose Barb, no clamp required
when used with SENCO Quick Couple Hose

OILS & LUBRICANTS

OILS & LUBRICANTS

Description	Overview	Size	Case Qty.	ITEM #
Pneumatic Tool Oil (½ pt)	- Premium-grade oil with high-quality paraffin distillate stock - Contains a carefully balanced rust & oxidation inhibitor with an effective anti-foaming additive	8 oz	12	PC0101
Pneumatic Tool Oil (1 qt)	- Premium-grade oil with high-quality paraffin distillate stock - Contains a carefully balanced rust & oxidation inhibitor with an effective anti-foaming additive	32 oz	12	PC0102
Pneumatic Tool Oil (1 gal)	- Premium-grade oil with high-quality paraffin distillate stock - Contains a carefully balanced rust & oxidation inhibitor with an effective anti-foaming additive	128 oz	4	PC0103
Compressor Pump Oil (1 qt)	- Premium-grade oil with high-quality naphthenic distillate stock - Recommended for all oil-splash compressors - Protects against corrosion - Lubricates to extend part life	32 oz	12	PC0344
Moisture Shield Tool Lubricant (1 qt)	- For use in cold weather &/or high-moisture areas - Protects against corrosion - Lubricates to extend part life - Special additive to minimize exhaust fog	32 oz	12	PC1295
Tool Lubricant	- Protects against corrosion - Lubricates to extend part life - Special additive to minimize exhaust fog	4 oz	12	YB0123



½ PT.
PC0101

1 QT.
PC0102



1 GAL.
PC0103



COMPRESSOR
PUMP OIL
PC0344



MOISTURE SHIELD
TOOL LUBRICANT
PC1295



TOOL
LUBRICANT
YB0123

SAFETY GLASSES

SAFETY GLASSES

Description	Overview	Qty.	ITEM #
Wrap-Around Safety Glasses	- Filters 99% of UVA & UVB rays - Meets or exceeds ANSI Z87.1 & CE EN 166 safety standards - For indoor & outdoor use	10-Case	PC1166



WRAP AROUND
SAFETY GLASSES
PC1166

TOOL BELT HOOKS

TOOL BELT HOOKS

Description	Size	Qty.	ITEM #
Attaches to ¼" Air Fitting on Tool	Standard	1	PC0350
Attaches to ¼" Air Fitting on Tool	X-Wide	1	PC0629
Attaches to ⅜" Air Fitting on Tool	Standard	1	PC0351
Attaches to ⅜" Air Fitting on Tool	X-Wide	1	PC0630



BELT HOOK
PC0350



BELT HOOK
PC0629



BELT HOOK
PC0351



BELT HOOK
PC0630

EXTENDED LENGTH MAGAZINES

EXTENDED LENGTH MAGAZINES FOR CORDLESS PNEUMATIC FRAMERS

Tool	ITEM #
F-35XP	GA0767
F-35FRHXP	GA0778



EXTENDED LENGTH MAGAZINE
GA0767



EXTENDED LENGTH MAGAZINE
GA0778

LI-ION BATTERIES

FOR USE WITH 18V LI-ION CORDLESS SCREWDRIVERS & CORDLESS PNEUMATIC TOOLS

Description	Overview	ITEM #	Compatible With
18V Li-Ion Battery 2.0 amp hour	- High-quality reliable cells - Charges to 50% in less than 20 minutes & 100% in less than 60 minutes	VB0212	● ● ● ● ● ● ● ●
18V Li-Ion Battery 4.0 amp hour	- State of the art 21700 cells - Charges to 50% in less than 20 minutes & 100% in less than 60 minutes	VB0210*	● ● ● ● ● ● ● ● DS222-18V DS225-18V DS322-18V F-15XP F-16XP F-18XP F-LXP F-35XP* F-35FRHXP*

*For optimal performance only use the VB210 battery with the F-35XP & F-35FRHXP



**2 AMP HOUR
VB0212**



**4 AMP HOUR
VB0210**

BATTERY CHARGER

FOR USE WITH SENCO BATTERIES

Description	Overview	ITEM #	Compatible With
Battery Charger	5 amp quick charger - Upright design for wall mounting	VB0189	● ● VB0212 VB0210



**5 AMP
VB0189**

REPLACEMENT NO-MAR PADS

One pad per pack

For	ITEM #
AF25, CF25	HF0064
AF41, CF41	HF0079
FIP11	HC0463
FIP15, FIP18	HC0506
FIP15Mg, BN31M1P	HC0571
FIP23SXP, 23LXP, 21LXP	HC0729
FIP25XP	HF0064
FIP32**	HC0401
FIP41XP, FIP42XP	HF0079
FN55AX	HF0113
FN65DA	HF0110
FP600-650 SERIES	HF0046, HC0253

**Refer to parts chart to identify desired safety element design

REPLACEMENT NO-MAR PADS

One pad per pack

For	ITEM #
FP601, FP602, FP651, FP652	HA0170
FP700 SERIES	HF0046, HC0253
GT65DA	HF0064
GT65RHA	HF0079
GT90CH	HC0463
GT90FRH	HC0506
SCN49	HC0571
SFN30, SFN40, SFNI	HC0729
SLS15, SLS18	HF0064
SLS20, SLS20XP (K, L & R CROWNS)	HC0401
SLS20, SLS20XP (M CROWN)	HF0079
SLS25-L, SLS25XP-L	HF0113



TOOL MAINTENANCE

SENCO repair kits are designed to provide the parts normally needed to properly maintain & service your tools. Be sure to visit www.senco.com/parts-service/ to see a complete list of tool manuals, parts charts & much more.



PARTS KITS

TOOL MODEL	DESCRIPTION	ITEM CODE
BN31M1P	Repair Kit	YK0908
BN31M1P	Repair Kit	YK0780
CS6IH1	Repair Kit	YK0911
FinishPro™18Mg	Repair Kit	YK0393
FinishPro™18BMg	Repair Kit	YK0868
FinishPro™21LXP	Repair Kit	YK0855
FinishPro™23LXP	Repair Kit	YK0855
FinishPro™23SXP	Repair Kit	YK0854
FinishPro™25XP	Firing System Kit	YK0281
FinishPro™25XP	Piston Stop Kit	YK0282
FinishPro™42XP	Firing System Kit	YK0361
FinishPro™42XP	Piston Stop Kit	YK0362
FN8IT1	Repair Kit	YK0894
FN8IT1	Repair Kit	YK0893
FN9IT1	Repair Kit	YK0894
FN9IT1	Repair Kit	YK0893
FramePro™325FRHXP	Firing System Kit	YK0444
FramePro™325FRHXP	Piston Stop Kit	YK0445
FramePro™325XP	Firing System Kit	YK0444
FramePro™325XP	Piston Stop Kit	YK0445
FramePro™701XP	Firing System Kit	YK0243
FramePro™701XP	Piston Stop Kit	YK0244
FramePro™702XP	Firing System Kit	YK0243
FramePro™702XP	Piston Stop Kit	YK0244
FramePro™751XP, FramePro™751XP-SL	Firing System Kit	YK0243
FramePro™751XP, FramePro™751XP-SL	Piston Stop Kit	YK0244
FramePro™752XP, FramePro™752XP-SL	Firing System Kit	YK0243
FramePro™752XP, FramePro™752XP-SL	Piston Stop Kit	YK0244
JN91H1	Repair Kit	YK0895
JN91H1	Repair Kit	YK0896
JN91H2	Repair Kit	YK0895
JN91H2	Repair Kit	YK0896
JN91P1	Repair Kit	YK0898
JN91P1	Repair Kit	YK0899
JN91P2	Repair Kit	YK0898
JN91P2	Repair Kit	YK0899
JoistPro™150XP	Firing System Kit	YK0823
JoistPro™150XP	Piston Stop Kit	YK0824
JoistPro™250XP	Firing System Kit	YK0825
JoistPro™250XP	Piston Stop Kit	YK0826
JoistPro™150XP	Safety Upgrade Kit	YK0869
LS1XP	Repair Kit	YK0858
LS6IHIP	Repair Kit	YK0908
LS6IHIP	Repair Kit	YK0780
NS20BXP	Firing System Kit	YK0838
NS20BXP	Piston Stop Kit	YK0839
NS20XP	Firing System Kit	YK0840
NS20XP	Piston Stop Kit	YK0841
NS20XP	Siding Safety Kit	HC0788
PAL57FXP	Repair Kit	YK0446
PS15RXP	Retrofit Kit - Solid Safety	YJ0049
PS15RXP	Repair Kit	YK0784

PARTS KITS

TOOL MODEL	DESCRIPTION	ITEM CODE
PS15RXP	Repair Kit	YK0818
PS15RXP	Block Out Kit	YK886
PS15RXP	Repair Kit	YK0783
PS15XP	Repair Kit	YK0784
PS15XP	Repair Kit	YK0818
PS15XP	Block Out Kit	YK886
PS15XP	Repair Kit	YK0783
PS20XP	Repair Kit	YK0783
RoofPro™ 445XP*	Wear Guard Kit	YK0870
RoofPro™ 445XP*	Gate Repair Kit	YK0871
RoofPro™445XP*	Repair Kit	YK0903
SC 1	Repair Kit	YK0370
SC 2	Repair Kit	YK0371
SCN49XP	Repair Kit	YK0771
SCN60XP	Seal Kit	YK0366
SCN65XP, SCN65XP-SL	Seal Kit	YK0366
SCP40XP	Firing System Kit	YK0444
SCP40XP	Piston Stop Kit	YK0445
SFT10XP	Piston Stop Kit	YK0802
SFT10XP	Firing System Kit	YK0803
SFT10XP (AUTO D/L)	Firing System Kit	YK0804
SFT10XP (AUTO D/L)	Piston Stop Kit	YK0802
SFT10XP (AUTO)	Firing System Kit	YK0804
SFT10XP D/L	Piston Stop Kit	YK0802
SFT10XP D/L LN	Firing System Kit	YK0803
SFT10XP LN	Piston Stop Kit	YK0802
SFT10XP LN	Firing System Kit	YK0803
SFW09	Repair Kit	YK0775
SKS	Repair Kit	YK0376
SKS	Retrofit Kit	YJ0035
SKSXP	Firing System Kit	YK0804
SLP20XP	Repair Kit	YK0373
SLS150Mg	Repair Kit	YK0852
SLS15Mg	Repair Kit	YK0780
SLS20XP	Repair Kit	YK0372
SLS25XP	Piston Stop Kit	YK0291
SLS25XP	Firing System Kit	YK0359
SN71P1	Repair Kit	YK0897
SNS41	Repair Kit	YK0423
SNS41	Driver/Back Plate Upgrade	YK0794
SNS41 (Retrofit Kit)	Cap/Firing Valve	YJ0034
SNS45XP	Piston Stop Kit	YK0231
SNS50XP	Seal Kit	YK0375
SQS55XP	Seal Kit	YK0375
TN 21L1	Repair Kit	YK0889
TN11G1	Repair Kit	YK0888
TN11G1P	Repair Kit	YK0910
TN11L1	Repair Kit	YK0889
TN41PIP	Repair Kit A	YK0906
TN41PIP	Repair Kit B	YK0907
TN51PIP	Repair Kit	YK0905

*For tools with serial number 239, 23A, 23B, 23C, or 24

DURASPIN COLLATED SCREWDRIVERS

MODEL	ITEM #	PAGE
DS222-18V - 2" 2500 RPM Cordless Collated Screwdriver	10B0002N	3
DS225-18V - 2" 5000 RPM Cordless Collated Screwdriver	10A0002N	3
DS242-AC - 2" 120V 2500 RPM Collated Screwdriver	10E0001N	4
DS245-AC - 2" 120V 5000 RPM Collated Screwdriver	10D0001N	4
DS322-18V - 3" 2500 RPM Cordless Collated Screwdriver	10C0002N	3
DS342-AC - 3" 120V 2500 RPM Collated Screwdriver	10F0001N	4

DURASPIN ATTACHMENTS & KITS

MODEL	ITEM #	PAGE
DS230-D1 - 2" Collated Screwdriver Attachment	9Z0011N	6
DS230-D2 - 2" Collated Screwdriver Attachment	9Z0012N	6
DS230-M1 - 2" Collated Screwdriver Attachment	9Z0021N	6
DS230-S1 - 2" Collated Screwdriver Attachment	9Z0001N	6
DS530-D1 - 3" Collated Screwdriver Attachment	10X0012N	7
DS530-M1 - 3" Collated Screwdriver Attachment	10X0022N	7
DS530-S1 - 3" Collated Screwdriver Attachment	10X0002N	7
DS532-AC - 3" 2500 RPM Screwdriver & Attachment Kit	10X0003N	5
DS534-AC - 3" 4000 RPM Screwdriver & Attachment Kit	10X0013N	5
SG2510 - High Performance 2500 RPM Screwdriver	6X0002N	5
SG4100 - High Performance 4000 RPM Screwdriver	6X0004N	5

PNEUMATIC TOOLS

MODEL	ITEM #	PAGE
A11 - 20 GA. 7/16" Crown, 3/8" Hammer Stapler	PC0700	48
A20 - 7" Bulk Nailer	PC0781	33
BN31MIP - 2 1/4" 18 GA. Brad Nailer	BN31MIP	17
CS61H1 - 3/8" Crown, 1 1/2" Staple & 1" Cap Stapler	CS61H1	48
DFPXP - 20 GA. 1/2" Crown, 1/2" Staple Clinch Tool	8H0001N	54
F-15XP - 2 1/2" 15 GA. Cordless Finish Nailer	10L0001N	15
F-16XP - 2 1/2" 16 GA. Cordless Finish Nailer	10N0001N	15
F-18XP - 2 1/2" 18 GA. Cordless Brad Nailer	10M0001N	15
F-35FRHXP - 3 1/2" 21" Cordless Plastic Collated Framing Nailer	10H0002N	29
F-35XP - 3 1/2" 30" Cordless Paper Tape Framing Nailer	10G0002N	29
F75LXP - 18 GA. 7/16" Crown, 3/8" Staple Clinch Tool	8J0002N	54
F75XP - 18 GA. 7/16" Crown, 3/8" Staple Sisal Anvil	8J0001N	54
FinishPro®25XP - 2 1/8" 18 GA. Brad Nailer	760102N	18
FinishPro®30XP - 2" 15 GA. Angled Finish Nailer	9P0002N	19
FinishPro®42XP - 2 1/2" 15 GA. Angled Finish Nailer	4G0001N	19
F-LXP - 18 GA. 1/4" Crown, 1 1/2" Cordless Finish Stapler	10Y0001N	15
FN81T1 - 3 1/2" 21" Full Round Head Framing Nailer	FN81T1	30
FN91T1 - 3 1/2" 30" Paper Tape Framing Nailer	FN91T1	30
FramePro®325FRHXP - 3 1/4" 21" Full Round Head Framing Nailer	4H0101N	32
FramePro®325XP - 3 1/4" 30" Paper Tape Framing Nailer	4Z0101N	31
FramePro®701XP - 3 1/2" 30" Paper Tape Framing Nailer	2H0133N	31
FramePro®702XP - 3 1/2" 21" Full Round Head Framing Nailer	2K0103N	32
FramePro®751XP - 3 1/2" 30" Paper Tape Framing Nailer	2J0103N	31
FramePro®752XP - 3 1/2" 21" Full Round Head Framing Nailer	2F0103N	32
JN91H1 - 1 1/2" Metal Connector Nailer	JN91H1	34
JN91H2 - 1 1/2" Metal Connector Nailer with Extended Magazine	JN91H2	34
JN91P1 - 2 1/2" Metal Connector Nailer	JN91P1	34
JN91P2 - 2 1/2" Metal Connector Nailer with Extended Magazine	JN91P2	34
LS1XP - 1" 18 GA. Headless Brad Nailer	8N0001N	17
LS61H1P - 18 GA. 1/4" Crown, 1 1/2" Finish Stapler	LS61H1P	21
NS20BXP - 16 GA. 7/16" Crown, 2" Construction Stapler	9Y0001N	36, 60
NS20XP - 16 GA. 7/16" Crown, 2" Construction Stapler	NS20XP	36
PalletPro™57FXP - 2 1/4" 15° Coil Nailer	4L0001N	53
PalletPro™100XP - 4" 15° Coil Nailer (Special Order Tool)	5L0001N	53
PalletPro™130XP - 5 1/8" 15° Coil Nailer (Special Order Tool)	5M0001N	53
PC1195 - 3 1/2" Bulk Nailer	PC1195	33
PS15RXP - 16 GA. 1" Wide Crown, 1 1/2" Roofing Stapler	9U0001N	48
PS15XP - 16 GA. 1" Wide Crown, 1 1/2" Construction Stapler	9T0001N	35
PS20XP - 16 GA. 1" Wide Crown, 2" Construction Stapler	9W0001N	35
RoofPro™445XP - 1 1/4" Coil Nailer	8V0001N	47
SC1XP Senclamp® - 7/16" Crown, 3/8" 25 GA. Senclamp® Fastener	220101N	21
SC2 Sencor® - 1" Crown, 1/2" 25 GA. Corrugated Fastener	470001N	21
SCN60XP - 2 3/4" 15° Coil Nailer	520101N	33
SCN65XP - 3 1/2" 15° Coil Nailer, Flat Safety	540101N	33
SCN65XP - 3 1/2" 15° Coil Nailer, Toenail Safety	540104N	33
SCP40XP - 1 1/2" Pneumatic Concrete & Steel Pinner	7J0009N	35
SFT10XP - 22 GA. 3/16" Crown, 3/8" Fine Wire Stapler-Standard	6S0001N	59
SFT10XP - 22 GA. 1/2" Crown, 3/8" Fine Wire Stapler-Standard	6S0011N	59
SFT10XP - 22 GA. 3/8" Crown, 3/8" Fine Wire Stapler-Standard	6S0021N	59
SFT10XP - 20 GA. 3/16" Crown, 3/8" Fine Wire Stapler-Standard	6S0031N	59
SFT10XP - 20 GA. 1/2" Crown, 3/8" Fine Wire Stapler-Standard	6S0041N	59

PNEUMATIC TOOLS (CONTINUED)

MODEL	ITEM #	PAGE
SFT10XP - 20 GA. 3/16" Crown, 3/8" Fine Wire Stapler-Standard	6S0051N	59
SFT10XP - 22 GA. 3/16" Crown, 3/8" Fine Wire Stapler-Auto	6S0101N	59
SFT10XP - 22 GA. 3/8" Crown, 3/8" Fine Wire Stapler-Auto	6S0121N	59
SFT10XP - 22 GA. 3/8" Crown, 3/8" Fine Wire Dbl. Length Mag. Stapler-Standard	6S0221N	59
SFT10XP - 20 GA. 7/16" Crown, 3/8" Fine Wire Dbl. Length Mag. Stapler-Standard	6S0251N	59
SFT10XP - 22 GA. 1/2" Crown, 3/8" Fine Wire Dbl. Length Mag. Stapler-Auto	6S0311N	59
SFT10XP - 22 GA. 3/8" Crown, 3/8" Fine Wire Dbl. Length Mag. Stapler-Auto	6S0321N	59
SFT10XP - 20 GA. 1/2" Crown, 3/8" Fine Wire Dbl. Length Mag. Stapler-Auto	6S0341N	59
SFT10XP - 20 GA. 7/16" Crown, 3/8" Fine Wire Dbl. Length Mag. Stapler-Auto	6S0361N	59
SFT10XP - 22 GA. 3/8" Crown, 3/8" Fine Wire Long Nose Stapler-Standard	6S0421N	59
SFW09 - 22 GA. 3/16" Crown, 3/8" Upholstery Stapler	4C0001N	60
SHF200 - 2" Pneu. Mallet Actuated Hardwood Flooring Cleat Nailer	8D0001N	64
SKSXP-L - 18 GA. 1/4" Crown, 1 1/2" Finish Stapler	300120N	20
SKSXP-M - 18 GA. 3/8" Crown, 1 1/2" Finish Stapler	300152N	20
SKSXP-N - 16 GA. 7/16" Crown, 1 1/2" Finish Stapler	300184N	20
SLP20XP - 1 5/8" 18 GA. Brad Nailer	430101N	18
SLS20XP-HF - 19 GA. 3/8" Crown, 1" Hardwood & Laminate Floor Stapler	490021N	64
SLS20XP-K - 19 GA. 1/4" Crown, 1 1/2" Finish Stapler	490101N	20
SLS20XP-L - 18 GA. 1/4" Crown, 1 1/2" Finish Stapler	490103N	20
SLS20XP-L SENCOMATIC - 18 GA. 1/4" Crown, 1 1/2" Finish Stapler	490015N	20
SFT10XP - 20 GA. 7/16" Crown, 3/8" Fine Wire Dbl. Length Mag. Stapler	490105N	20
SLS20XP-M - 18 GA. 3/8" Crown, 1 1/2" Finish Stapler	490107N	20
SLS20XP-R - 19 GA. 3/16" Crown, 1 1/2" Finish Stapler	490111N	20
SLS25XP-L - 18 GA. 1/4" Crown, 1 1/2" Finish Stapler	820103N	20
SLS25XP-M - 18 GA. 3/8" Crown, 1 1/2" Finish Stapler	820107N	20
SN71P1 - 2 1/2" 15° Coil Siding Nailer	SN71P1	47
SNS41 - 16 GA. 7/16" Crown, 2" Construction Stapler	3L0003N	36
SNS45XP - 16 GA. 7/16" Crown, 2" Construction Stapler	580101N	37, 60
SNS50XP - 16 GA. 7/16" Crown, 2" Construction Stapler	750101N	37, 60
SQS55XP - 15 GA. 7/16" Crown, 2 1/2" Construction Stapler	660101N	37
TN11G1 - 1 3/8" 23 GA. Pinner	TN11G1	16
TN11G1P - 1 3/8" 23 GA. Pinner	TN11G1P	16
TN11L1 - 2" 23 GA. Pinner	TN11L1	16
TN21L1 - 2" 21 GA. Pinner	TN21L1	17
TN41PIP - 2 1/2" 16 GA. Finish Nailer	TN41PIP	18
TN51PIP - 2 1/2" 15 GA. Finish Nailer	TN51PIP	19
SQS55XP - 15 GA. 7/16" Crown, 2 1/2" Construction Stapler	660101N	37
TN11G1 - 1 3/8" 23 GA. Pinner	TN11G1	16
TN11G1P - 1 3/8" 23 GA. Pinner	TN11G1P	16
TN11L1 - 2" 23 GA. Pinner	TN11L1	16
TN21L1 - 2" 21 GA. Pinner	TN21L1	17
TN41PIP - 2 1/2" 16 GA. Finish Nailer	TN41PIP	18
TN51PIP - 2 1/2" 15 GA. Finish Nailer	TN51PIP	19

AIR COMPRESSORS & KIT

MODEL	ITEM #	PAGE
PC0947 - 2" FinishPro®18 Brad Nailer & PC1010 Compressor Kit	PC0947	67
PC0968 - 1 HP, 2 1/2 Gal. Twin Tank Finish & Trim Air Compressor	PC0968	67
PC1010 - 1/2 HP, 1 Gal. Finish & Trim Air Compressor	PC1010	67
PC1010N - 1/2 HP, 1 Gal. Finish & Trim Air Compressor	PC1010N	67
PC1131 - 2 HP, 4.3 Gal. Twin Tank Air Compressor	PC1131	67
PC1280 - 1 1/2 HP, 6 Gal. Pancake Air Compressor	PC1280	67

AUTOMATION

MODEL	ITEM #	PAGE
DS342-SL - 120V 2500 RPM Mounted Collated Screwdriver	10FI15A	72
FramePro®751XP-SL Series - 3 1/2" 30" Mounted Framing Nailer	Item # Varies	69
FramePro®752XP-SL Series - 3 1/2" 21" Mounted Framing Nailer	Item # Varies	69
SCN65XP-SL - 15° 3 1/2" Mounted Coil Nailer	540160N	69



TN51PIP, LS61H1P,
TN41PIP, TN11G1P & BN31M1P

NAILS

ITEM CODE	BOXES/ CARTON	BOXES/ SKID	PAGE
A109809R	24	1080	22
A209809R	32	1152	23
A209909R	24	768	23
AX08EAA	32	1152	23
AX10EAA	16	480	23
AX11EAA	16	480	23
AX11EAA	32	1152	23
AX13EAA	10	300	23
AX13EAA	32	1152	23
AX15EAA	10	300	23
AX15EAA	32	1152	23
AX17EAA	8	240	23
AX17EAA	24	768	23
AX18EAA	8	240	23
AX19EAA	6	180	23
AX21EAA	6	180	23
AX21EAA	24	768	23
AX22EAA	6	180	23
AX22EAA	24	768	23
AY10EAA	16	480	23
AY11EAA	16	480	23
AY13EAA	10	300	23
AZ07EAA	32	960	23
AZ08EAA	32	960	23
AZ11EAA	24	720	23
AZ13EAA	16	480	23
BD17APBC	N/A*	30	49
BE23AABF	N/A*	45	42, 56
BG17AAAQ	N/A*	40	43
BG18AAAQ	N/A*	40	43
BK21BPBFN	N/A*	35	43, 57
BK23BPBFN	N/A*	35	43, 57
BK25BPBFN	N/A*	35	43, 57
BL21APBF	N/A*	45	42, 56
BT21APBF	N/A*	45	42, 56
BT21APBP	N/A*	24	71
CZ08EAA	24	1440	22
CZ08EAA	N/A*	140	22
CZ08EAA	24	1080	22
CZ10EAA	24	1440	22
CZ10EAA	N/A*	140	22
CZ10EAA	24	1080	22
CZ11EAA	24	1152	22
CZ11EAA	N/A*	140	22
CZ11EAA	24	1080	22
CZ13EAA	12	720	22
CZ13EAA	24	1080	22
CZ15EAA	12	720	22
CZ15EAA	24	1080	22
CZ16EAA	12	720	22
CZ16EAA	24	1080	22
CZ17EAA	12	720	22
CZ17EAA	24	960	22
CZ21EAA	12	576	22
CZ21EAA	24	960	22
DA13EABR	18	504	24
DA13EPBN	5	200	24
DA13EPBR	18	504	24
DA15AIA	5	200	24
DA15EABN	5	200	24
DA15EABR	18	504	24
DA15EPBN	5	200	24
DA15EPBR	18	504	24
DA17AIA	5	200	24
DA17EABN	5	200	24
DA17EABR	18	504	24
DA17EPBN	5	200	24
DA17EPBR	18	504	24
DA19AIA	4	160	24
DA19EABN	4	160	24
DA19EABR	15	420	24
DA19EPBN	4	160	24
DA19EPBR	15	420	24
DA21EABN	4	160	24
DA21EABR	15	420	24
DA21EGBR	15	420	24
DA21EPBN	4	160	24
DA21EPBR	15	420	24
DA23EPBN	3	120	24

NAILS (CONTINUED)

ITEM CODE	BOXES/ CARTON	BOXES/ SKID	PAGE
DA25EAB	3	120	24
DA25EABR	12	336	24
DA25EGBR	12	336	24
DA25EPB	3	120	24
DA25EPBR	12	336	24
ED23AABH	N/A*	60	49, 55
EJ23ASBC	N/A*	24	49
EL19AGBH	N/A*	60	50, 55
EL19ASBH	N/A*	60	50, 55
EL20AABH	N/A*	60	50, 55
EL20ASBH	N/A*	60	50, 55
EL21AGBH	N/A*	60	50, 55
EL21ASBH	N/A*	60	50, 55
EL23AABH	N/A*	60	50, 55
EL23AGBH	N/A*	60	50, 55
EL23ASBC	N/A*	24	50
EL23ASBH	N/A*	60	50, 55
G624ASBXNR	4	192	39
GC21APBX	N/A*	80	38
GC23AHAK	N/A*	80	40
GC24APBX	N/A*	72	38
GC24ASBX	N/A*	72	38
GC25APBX	N/A*	72	38
GD21AABF	N/A*	40	42, 55
GD21APBF	N/A*	40	42, 55
GD24APBSN	N/A*	48	41
GD24ASBS	N/A*	45	41
GD25AABF	N/A*	40	42, 55
GD25AABSN	N/A*	48	41
GD25APBF	N/A*	40	42, 55
GD25APBSN	N/A*	48	41
GE21APAX	N/A*	80	39
GE21ASBX	N/A*	80	39
GE24AGBK	N/A*	80	40
GE24APBX	N/A*	72	39
GE24ASBX	N/A*	72	39
GL21APBF	N/A*	40	42, 56
GL21APBSN	N/A*	48	41
GL21ASBS	N/A*	45	41
GL24AABSN	N/A*	48	41
GL24AGBF	N/A*	40	42, 56
GL24AGBS	N/A*	72	41
GL24APBF	N/A*	40	42, 56
GL24APBSN	N/A*	48	41
GL24ASBF	N/A*	40	42, 56
GL24ASBS	N/A*	45	41
GL24ASBSNR	4	192	41
GT24APBF	N/A*	40	42, 56
GT24APBP	N/A*	48	71
H527APBXNR	3	120	38
H627ASBXNR	3	120	39
HC27APBX	N/A*	48	38
HC27ASBX	N/A*	48	38
HC28APBX	N/A*	48	38
HD27APBF	N/A*	40	42, 55
HD27APBSN	N/A*	48	41
HE27APBXN	N/A*	48	39
HE27ASBX	N/A*	48	39
HF27EDB	N/A*	80	40
HF27EPAK	N/A*	40	40
HK27APBFN	N/A*	35	43, 57
HL27AGBS	N/A*	54	41
HL27ASBF	N/A*	40	42, 56
HL27ASBS	N/A*	40	41
HR22APAF	N/A*	40	43
HR74APAF	N/A*	40	43
J08BAAN	9	288	57
J10BAAN	8	160	57
K11BAB	6	240	25
K12BAB	10	400	25
K13BAB	12	384	25
K527APBXNR	3	120	38
K527ASBXNR	3	120	38
K528APBXNR	3	120	38
K528ASBXNR	3	120	38
KC25APBXN	N/A*	72	38
KC27AGBK	N/A*	80	40
KC27APBX	N/A*	48	38
KC27ASBX	N/A*	48	38

NAILS (CONTINUED)

ITEM CODE	BOXES/ CARTON	BOXES/ SKID	PAGE
KC28AGBK	N/A*	80	40
KC28APBX	N/A*	48	38
KC28ASBX	N/A*	48	38
KC29APBX	N/A*	48	38
KC29ASBX	N/A*	48	38
KC31APBX	N/A*	40	38
KD25AABS	N/A*	45	41
KD25APBF	N/A*	40	42, 55
KD25APBP	N/A*	45	71
KD25APBSN	N/A*	48	41
KD27APBF	N/A*	40	42, 55
KD27APBP	N/A*	45	71
KD27APBSN	N/A*	48	41
KD27APBSNR	3	96	41
KD27ASBF	N/A*	24	42, 55
KD27ASBS	N/A*	40	41
KD27ASBSNR	3	96	41
KD28APBF	N/A*	40	42, 55
KD28APBSN	N/A*	48	41
KD28APBSNR	3	96	41
KD28ASBF	N/A*	24	42, 55
KD28ASBS	N/A*	40	41
KD28ASBSNR	3	96	41
KD29APBF	N/A*	40	42, 55
KD29APBSN	N/A*	48	41
KD29ASBS	N/A*	40	41
KE27ASBXN	N/A*	48	39
KE28APBXN	N/A*	48	39
KE28ASBXN	N/A*	48	39
KT25APBF	N/A*	40	42, 56
LC29APBX	N/A*	48	38
M001000	20	960	24
M001000R	20	840	24
M001001	16	768	24
M001001R	20	840	24
M001002	6	480	24
M001002R	20	840	24
M001003	6	480	24
M001003R	20	840	24
M001004	6	384	24
M001004R	16	640	24
M001005	6	384	24
M001005R	16	640	24
M001006R	12	480	24
M001007	6	288	24
M001007R	12	480	24
M002261	N/A*	48	44
M002262	N/A*	48	44
M002263	N/A*	48	44
M002264	N/A*	48	44
M002265	N/A*	48	44
M002266	N/A*	48	44
M003011	N/A*	24	43
M003101	N/A*	56	49
M003103	N/A*	56	49
M003104	N/A*	48	49
M003105	N/A*	40	49
M003106	N/A*	40	49
MD17AJBDN	N/A*	96	44
MD17AQBD	N/A*	96	44
MD25AJBDN	N/A*	96	44
MD25AQBDN	N/A*	96	44
MD27APBSN	N/A*	36	41
MD28APBSN	N/A*	36	41
MD34APBF	N/A*	36	42, 55
ND25AJBDN	N/A*	96	44
ND25AQBDN	N/A*	96	44
R10BAB	12	480	25, 65
R11BAB	12	480	25
R13BAB	12	480	25
RW17BPE	10	510	65
RW19BPE	10	510	65
RW21BPE	10	510	65
SE15APB	N/A*	40	50
SE15APBH	N/A*	40	50, 55
SE17APBH	N/A*	40	50, 55
SE19APB	N/A*	40	50
W3050YXS	5	250	43
W3075YXC	5	250	43

*Ships in the item box, not in a master shipping carton

NAILS (CONTINUED)

ITEM CODE	BOXES/ CARTON	BOXES/ SKID	PAGE
W3100YXC	5	250	43
W3125YXC	5	250	43
W3150YXC	5	250	43
ZX10EAA	6	576	22
ZX13EAA	6	576	22
ZX13EAAR	48	1728	22
ZX16EAA	6	576	22
ZX16EAAR	48	1728	22
ZX18EAA	4	432	22
ZX18EAAR	24	768	22
ZX21EAA	4	432	22
ZX21EAAR	24	768	22



SNS45XP,
N21BRB

*Ships in the item box, not in a master shipping carton

STAPLES

ITEM CODE	BOXES/ CARTON	BOXES/ SKID	PAGE
A04BAAN	48	1152	61
A06BABN	6	216	61
A06BABP	8	192	61
A08BAB	12	288	61
A08BABP	8	192	61
A809090R	20	560	25
B04BAAPN	8	192	61
B06BAAP	4	96	61
B08BAAP	4	96	61
C02BAAPN	8	192	61
C03BAAPN	8	192	61
C03BGAN	8	272	61
C04BAAP	8	192	61
C04BAAR	24	480	61
C04BGAN	8	272	61
C05BAAPN	8	192	61
C06BAAP	4	96	61
C06BAAR	24	480	61
C06BGA	20	480	61
C06BHA	20	640	61
C07BAAPN	4	96	61
C08BAAP	4	96	61
C08BAAR	24	480	61
C10BAAP	4	96	61
C10BAAR	12	384	61
D10BABN	6	216	61
D10BABPN	8	192	61
E06BAA	20	640	62
E08BAA	16	512	62
E10BAA	25	800	62
F04BAAN	12	384	62
F04BAAP	8	192	62
F05BAAP	4	96	57, 62
F06BAA	10	300	57, 62
F06BAAP	4	96	57, 62
F06BGA	10	300	57, 62
F08BAAN	8	240	57, 62
F08BAAP	4	96	57, 62
G08BAB	20	640	62
H06BAA	20	480	51, 62
H06BAAPR	15	600	62
L06BAB	10	360	25
L07BABP	N/A*	112	25
L08BAB	8	288	25
L10BABN	12	432	25
L10BABR	24	672	25
L10HABN	12	360	25
L11BAB	10	360	25
L11BABR	24	672	25
L11BGA	10	360	25
L11GBR	24	672	25
L11BRB	10	360	25
L11HAB	10	288	25
L11HBB	10	180	25
L12BAB	10	360	25
L13BABN	8	288	25
L13BABR	24	672	25
L13BRBN	8	288	25
L14BAB	6	216	25
L14BGA	6	216	25
L14GBR	20	560	25
L14BRB	6	216	25
L15BAB	6	216	25
L15BABR	20	560	25
L15BRB	6	216	25
L17BAB	6	216	25
L17BABR	20	560	25
M06BABN	7	224	26
M08BAB	6	192	26
M10BABN	9	288	26, 51
M10BRBN	9	288	26
M11BABN	8	256	26, 51
M11BRBN	8	256	26
M12BAB	6	192	26, 51
M13BAB	6	192	26, 51
M13BRB	6	192	26
M15BAB	N/A*	60	26, 51
M17BAB	N/A*	48	26, 51
N08BABN	6	192	26, 45, 63

STAPLES (CONTINUED)

ITEM CODE	BOXES/ CARTON	BOXES/ SKID	PAGE
N08BBBN	6	192	26, 45, 63
N08FBB	6	192	26, 45, 63
N10BAB	6	192	26, 45, 63
N11BAB	6	192	26, 45, 63
N11FBB	6	192	26, 45, 63
N12BABN	6	192	26, 45, 63
N12FABN	5	160	26, 45, 63
N13BAB	4	128	26, 45, 63
N13FAB	4	128	26, 45, 63
N14BAB	N/A*	56	26, 45, 63
N14BRB	N/A*	56	26, 45, 63
N15BAB	N/A*	56	26, 45, 63
N15BRB	N/A*	56	26, 45, 63
N16BAB	N/A*	56	26, 45, 63
N16BRB	N/A*	56	26, 45, 63
N17BAB	N/A*	48	26, 45, 63
N17BGB	N/A*	165	26, 45, 63
N17BRB	N/A*	48	26, 45, 63
N18BAB	N/A*	48	26, 45, 63
N18BRB	N/A*	48	26, 45, 63
N19BAB	N/A*	40	26, 45, 63
N19BGBN	N/A*	130	26, 45, 63
N19BRB	N/A*	40	26, 45, 63
N21BAB	N/A*	40	26, 45, 63
N21BGBN	N/A*	120	26, 45, 63
N21BRB	N/A*	40	26, 45, 63
P06BAA	N/A*	60	44, 50
P08BABT	N/A*	60	44, 50
P10BAB	N/A*	60	44, 50
P10BPE	N/A*	60	44, 50
P10FAB	N/A*	60	44, 50
P11BAB	N/A*	50	44, 50
P11BPE	N/A*	50	44, 50
P12BAB	N/A*	40	44, 50
P13BAB	N/A*	40	44, 50
P13BABR	8	192	44
P13BGBN	N/A*	60	44, 50
P13BPE	N/A*	40	44, 50
P15BAB	N/A*	30	44, 50
P15BABR	8	192	44
P15BPE	N/A*	30	44, 50
P17BAB	N/A*	30	44, 50
P19BAB	N/A*	40	44
P21BAB	N/A*	40	44
Q15BAB	N/A*	64	45
Q17BAB	N/A*	64	45
Q17BRB	N/A*	64	45
Q19BAB	N/A*	64	45
Q19BRB	N/A*	64	45
Q21BAB	N/A*	56	45
Q21BRB	N/A*	56	45
Q23BRB	N/A*	48	45
Q25BAB	N/A*	48	45
Q25BGBN	N/A*	100	45
Q25BRB	N/A*	48	45
R11BAB	12	480	65
R13BAB	12	480	65
U10BCA	10	320	57
U11BCA	10	240	57
W10BAB	10	400	61
X04NRA	N/A*	224	27
X06NRA	N/A*	224	27
X08NRA	N/A*	224	27
Y05BFA	10	320	27
Y07BFA	8	256	27
Y09BFAN	6	180	27

CAPS, CAPS & STAPLES

ITEM CODE	BOXES/ CARTON	BOXES/ SKID	PAGE
CAP2400	N/A*	40	51
CS10BAA	N/A*	40	51
CS12BAA	N/A*	40	51
CS15BAA	N/A*	40	51
CS17BAA	N/A*	40	51

SCREWS

ITEM CODE	BOXES/ CARTON	BOXES/ SKID	PAGE
06A12SP	6	144	8
06A125PB	N/A*	72	8
06A125PS	N/A*	40	73
06A162P	6	144	8
06A162PB	N/A*	72	8
06A162PS	N/A*	40	73
06A162W	6	144	8
06B125P	6	144	8
06B125PB	N/A*	72	8
06B162P	6	144	8
06B162PB	N/A*	72	8
06B200PB	N/A*	48	8
06C125CB	N/A*	72	8
06C125CS	N/A*	40	73
06C125PB	N/A*	72	8
06C125WK	6	240	8
06C162CB	N/A*	72	8
06C162CS	N/A*	40	73
06C162PB	N/A*	72	8
06C162WK	6	240	8
06C200CB	N/A*	48	8
06C200PB	N/A*	48	8
07A200P	6	144	8
07A200PS	N/A*	40	73
07Q100PB	N/A*	72	8
07Q125PBQ	N/A*	72	8
08A250PK	6	192	8
08C300WK	6	144	8
08D175W	6	144	9
08D200W	6	144	9
08D250S	6	144	9
08D250W	6	144	9
08D250WK	6	192	9
08D300W	6	144	9
08D300WK	6	144	9
08F150Y	6	144	8
08F150YTK	6	240	8
08F150YTT	6	144	8
08F175Y	6	144	8
08F175YTB	N/A*	72	8
08F175YTS	N/A*	40	73
08F175YTT	6	144	8
08F200Y	6	144	8
08F200YBTHSS	N/A*	48	9
08F200YTS	N/A*	40	73
08F200YTT	6	144	8
08F250Y	6	144	8
08F250YK	6	192	8
08F250YTT	6	144	8
08F300Y	6	144	8
08F300YTK	6	144	8
08F300YTT	6	144	8
08G100CBWFDS	N/A*	72	9
08G150CSK	6	240	9
08G150CTLDSS	6	144	9
08G162CTWFWS	6	144	9
08G162CWK	6	240	9
08G200CKLFPS	6	192	9
08G200WWK	6	192	9
08G250WWK	6	192	9
08L125CBLCTS	N/A*	72	8
08L175YB	N/A*	72	8
08M050CDK	6	240	10
08M050CSK	6	240	10
08M100CBPDSS	N/A*	72	11
08R250W	6	144	9
08R300W	6	144	9
08S250W003	6	144	9
08S250W497	6	144	9
08S250W592	6	144	9
08T125W	6	144	11
08T150WBWFDS	N/A*	72	11
08T200W	6	144	11
08X125CBACTS	N/A*	72	11
08X125CKADDS	6	240	11
08X200CKADDS	6	192	11
09D300S	6	144	9
10G125CBWFDS	N/A*	72	9
10G162CWK	6	240	9

*Ships in the item box, not in a master shipping carton

SCREWS (CONTINUED)

ITEM CODE	BOXES/ CARTON	BOXES/ SKID	PAGE
10M075CDK	6	240	10
10M075CDK2	6	240	10
10M075CSK	6	240	10
10M075E0004B	N/A*	72	10
10M075E0014B	N/A*	72	10
10M075E0024B	N/A*	72	10
10M075E1114B	N/A*	72	10
10M075EBFT4X	N/A*	72	10
10M075YDK	6	240	10
10M075YKFT4X	6	240	10

SCREWS (CONTINUED)

ITEM CODE	BOXES/ CARTON	BOXES/ SKID	PAGE
10M075YLFT4X	N/A*	48	10
10M100CKMFDS	6	240	10
12G175YKLFAX	6	240	9
12G200YKLFCS	6	192	9
12G250YKLFCS	6	192	9
12M087E000LFF4X	24	768	11
12M087E111LFF4X	24	768	11
12M087ELFF4X	24	768	11
12M087YKFF4X	6	240	10
12M100YKFF3X	6	240	10



DS532-AC,
08D250W

DURASPIN® ACCESSORIES

ITEM CODE	PAGE
EA0297	12
EA0297N	12
EA0298	12
EA0298N	12
EA0299	12
EA0299N	12
EA0300	12
EA0301	12
EA0301N	12
EA0302	12
EA0308	12
EA0314	12
EA0315	12
EA0315N	12
EA0316	12
EA0316N	12
EA0396P	12
EA0397P	12
EA0400	12
EA0401	12
EA0402	12
FA0334	13
FB0155	13
FB0157	13
FB0159	13
FB0178	13
FB0181	13
FB0185	13
FB0187	13
FC0983	13
FCI022	13
FCI023	13
HA0332	13
MB0183	12
MB0184	12
MB0185	12
MB0186	12
MB0187	12

PNEUMATIC ACCESSORIES


ITEM CODE	PAGE
CA0191	70
CA0192	70
CA0193	70
GA0767	78
GA0778	78
HA0170	79
HA0362	70
HA0363	70
HA0368	70
HC0253	79
HC0401	79
HC0463	79
HC0506	79
HC0571	79
HC0729	79
HF0046	79
HF0064	79
HF0079	79
HF0110	79
HF0113	79
NPC035	35
PC0051	77
PC0057	77
PC0064	75
PC0065	75
PC0101	78
PC0102	78
PC0103	78
PC0344	78
PC0349	77
PC0350	78
PC0351	78
PC0477	76
PC0478	76

PNEUM. ACC. (CONT.)

ITEM CODE	PAGE
PC0479	76
PC0480	76
PC0489	77
PC0501	76
PC0502	76
PC0503	76
PC0504	76
PC0505	76
PC0506	76
PC0576	76
PC0577	76
PC0629	78
PC0630	78
PC0643	77
PC0656	77
PC0657	77
PC0900	76
PC0977	75
PC0978	75
PC0979	75
PC0983	77
PC0987	77
PC1138	77
PC1152	75
PC1166	78
PC1295	78
PC1319	75
PC1320	75
PC1321	75
PC1322	75
PC1323	76
PC1325	76
PC1328	76
PC1330	76
PC1337	75
PC1338	75
PC1339	75
PC1340	75
PC1341	75
SWM125B	35
XA211	70
YB0123	78


BATTERIES/CHARGERS

ITEM CODE	PAGE
VB0189	79
VB0210	79
VB0212	79

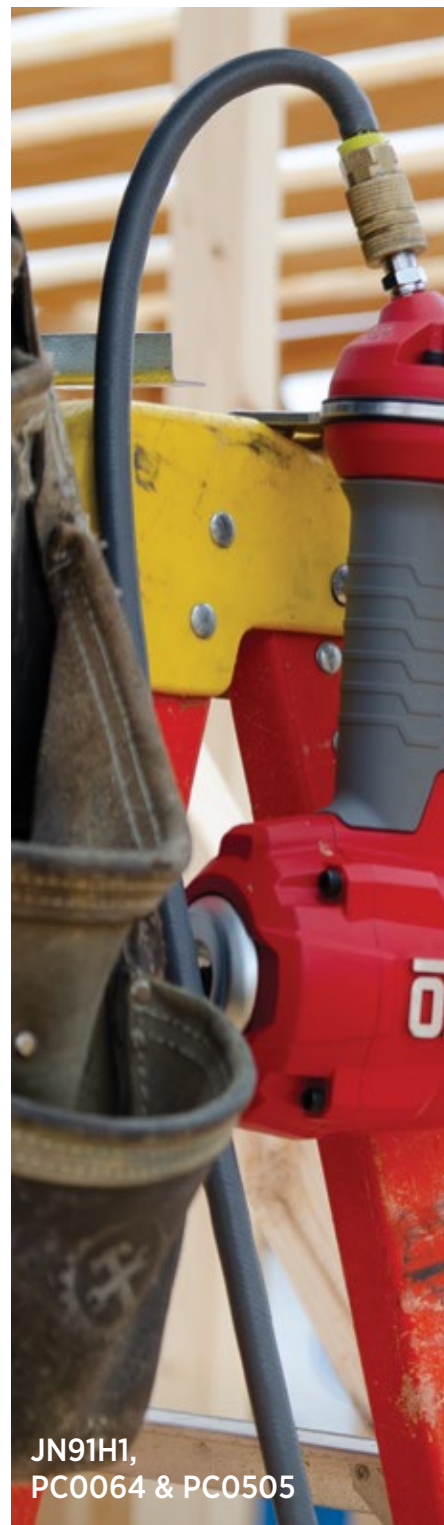

JN91H1,
PC0064 & PC0505

DURASPIN® AUTO-FEED SCREW SYSTEMS

COLLATED SCREWS	DRYWALL	WOOD/WOOD	DECKING	WOOD/STEEL	METAL/METAL	CEMENT BOARD	SPECIALTY
							
PGS. 8-11	PG. 8	PG. 8	PG. 9	PG. 9	PG. 10	PG.11	PG. 11

CORDLESS INTEGRATED	DS225-18V	DS222-18V	DS322-18V
			
PG. 3	PG. 3	PG. 3	PG. 3


CORDED INTEGRATED	DS245-AC	DS242-AC	DS342-AC
			
PG. 4	PG. 4	PG. 4	PG. 4

SCREWDRIVERS & SCREWDRIVER ATTACHMENT KITS	DS532-AC KIT	DS534-AC KIT	SG2510	SG4100
				
PG. 5	PG. 5	PG. 5	PG. 5	PG. 5

2" AUTO-FEED SCREWDRIVER ATTACHMENTS	DS230-S1	DS230-M1	DS230-D1	DS230-D2
				
PG. 6	PG. 6	PG. 6	PG. 6	PG. 6

3" AUTO-FEED SCREWDRIVER ATTACHMENTS	DS530-S1	DS530-M1	DS530-D1
			
PG. 7	PG. 7	PG. 7	PG. 7

FINISH & WOODWORKING

FINISH NAILS	F-15XP	FINISHPRO30®XP	TN51P1P	FINISHPRO®42XP
15^{GA} DA 				
PG. 24	PG. 15	PG. 19	PG. 19	PG. 19

FINISH NAILS	F-16XP	TN41P1P
16^{GA} STRAIGHT 		
PG. 24	PG. 15	PG. 18

BRAD NAILS	F-18XP	BN31M1P	LS1XP	SLP20XP	FINISHPRO®25XP
18^{GA} BRAD 					
PG. 23	PG. 15	PG. 17	PG. 17	PG. 18	PG.18

FINISH STAPLES	F-LXP	SLS20XP-L	SLS25XP-L	SKSXP-L	LS61H1P
18^{GA} L 					
PG. 25	PG. 15	PG. 20	PG. 20	PG. 20	PG. 21

FINISH STAPLES	SLS20XP-M	SLS25XP-M	SKSXP-M	FINISH STAPLES	SLS20XP-K
18^{GA} M 				19^{GA} K 	
PG. 26	PG. 20	PG. 20	PG. 20	PG. 25	PG. 20

FINISH & WOODWORKING

FINISH STAPLES	SLS20XP-R	MEDIUM PINS	TN21L1
 19^{GA} R		 21^{GA} PIN	
PG. 25	PG. 20	PG. 22	PG. 17

HEADLESS PINS	TN11G1	TN11L1	TN11G1P
 23^{GA} PIN			
PG. 22	PG. 16	PG. 16	PG. 16

SENCLAMP®	SC1XP SENCLAMP®	SENCOR®	SC2 SENCOR®
 25^{GA} SENCLAMP		 25^{GA} SENCOR	
PG. 27	PG. 21	PG. 27	PG. 21

FRAMING, SHEATHING & SUBFLOORS

COIL NAILS	SCN60XP	SCN65XP	HEAVY WIRE STAPLES	SQS55XP
 15° COIL			 15^{GA} Q	
PGS. 42-43	PG. 33	PG. 33	PG. 45	PG. 37

HEAVY WIRE STAPLES	NS20XP	NS20BXP	SNS41	SNS45XP	SNS50XP
 16^{GA} N					
PG. 45	PG. 36	PG. 36	PG. 36	PG. 37	PG. 37

FRAMING, SHEATHING & SUBFLOORS

HEAVY WIRE STAPLES	PS15XP	PS20XP
		
PG. 44	PG. 35	PG. 35

PLASTIC COLLATED NAILS	F-35FRHXP	FN81T1	FRAMEPRO®325FRHXP	FRAMEPRO®702XP	FRAMEPRO®752XP
					
PG. 41	PG. 29	PG. 30	PG. 32	PG. 32	PG. 32

PAPER TAPE NAILS	F-35XP	FN91T1	FRAMEPRO®325XP	FRAMEPRO®701XP	FRAMEPRO®751XP
					
PGS. 38-40	PG. 29	PG. 30	PG. 31	PG. 31	PG. 31


MINI HAND NAILER	A20 HAND NAILER	CONCRETE PINS	SCP40XP
			
PG. 33	PG. 33	PG. 43	PG. 35

METAL CONNECTOR NAILS	JN91H1	JN91H2	JN91P1	JN91P2
				
PG. 44	PG. 34	PG. 34	PG. 34	PG. 34

ROOFING, SIDING & FENCING

ROOFING NAILS	ROOFPRO®445XP	COIL NAILS	SN71P1
			
PG. 49	PG. 47	PGS. 49-50	PG. 47

HEAVY WIRE STAPLES	PS15RXP	CAP & STAPLES	CS61H1
			
PG. 50	PG. 48	PG. 51	PG. 48

FINE WIRE STAPLES	A11 HAMMER STAPLER
	
PG. 51	PG. 48

PALLETS & CRATING

COIL NAILS	PALLETPRO®57FXP	PALLETPRO®100XP	PALLETPRO®130XP
			
PGS. 55-57	PG. 53	PG. 53	PG. 53

FINE WIRE STAPLES	F75LXP	F75SXP	FINE WIRE STAPLES	DFPXP
				
PG. 57	PG. 54	PG. 54	PG. 57	PG. 54

UPHOLSTERY & FURNITURE

HEAVY WIRE STAPLES	NS20BXP	FINE WIRE STAPLES		SFT10XP FAMILY
		  	  	
PG. 63	PG. 60	PGS. 61-62		PG. 59
FINE WIRE STAPLES	SFW09			
				
PG. 61	PG. 60			

FLOORING

FLOORING CLEATS	SHF200	FLOORING STAPLES	SLS20XP-HF
			
PG. 65	PG. 64	PG. 65	PG. 64

AIR COMPRESSORS & KIT

PC1131	PC0968	PC1280	PC1010	PC1010N	PC0947 KIT
					
PG. 67	PG. 67	PG. 67	PG. 67	PG. 67	PG. 67

SMARTLOAD AUTOMATION

PAPER TAPE NAILS	FRAMEPRO®751XP-SL SERIES	PLASTIC COLLATED NAILS	FRAMEPRO®751XP-SL SERIES
			
PGS. 38-40	PG. 69	PG. 41	PG. 69
COIL NAILS	SCN65XP-SL	COLLATED SCREWS	DS342-SL
			
PG. 42-43, 71	PG. 69	PG. 73	PG. 72

TURN YOUR SHOWROOM INTO A Senco SHOWROOM



CONTACT YOUR LOCAL Senco REP TO LEARN MORE
ABOUT OUR MERCHANDISING SUPPORT PROGRAM.



**SENCO OFFERS A WIDE VARIETY OF
RETAIL ASSORTMENTS DESIGNED TO FIT
ANY STORE AND END USER.**



VISIT US:
SENCO.com

FOLLOW US:

youtube.com/sencobrands

instagram.com/sencobrands

facebook.com/sencobrands

x.com/senco

CONTACT US:

KYOCERA SENCO Industrial Tools, Inc.

8450 Broadwell Road

Cincinnati, Ohio 45244

Phone: 800.543.4596

