

CAMO[®]

The Better Way to Build a Deck

2023 PRODUCT CATALOG

CLIPDRIVE™

STAND UP DECK CLIP FASTENING SYSTEM

DRIVE™

STAND UP 3-IN-1 FASTENING SYSTEM

LEVER®

BOARD BENDING + LOCKING TOOL

MARKSMAN

HIDDEN EDGE SCREW FASTENING SYSTEM



FEATURING
NEW

CODE-COMPLIANT
STRUCTURAL SCREWS

SEE PAGES 32-40

THE BETTER WAY TO BUILD A DECK.

FASTENING SYSTEMS



CLIPDRIVE™

STAND-UP DECK CLIP FASTENING SYSTEM

The Better Way to Fasten CAMO Universal Deck Clips.

PAGES 4-5

FOR USE WITH CAMO UNIVERSAL DECK CLIPS



NEVER-MISS GUIDE™

DECK CLIP FASTENING SYSTEM

Included in every pail of CAMO Universal Deck Clips.

PAGES 6-7

FOR USE WITH CAMO UNIVERSAL DECK CLIPS



DRIVE™

STAND-UP 3-IN-1 FASTENING SYSTEM

Save time with the award-winning CAMO DRIVE™ tool.

PAGES 8-9

FOR USE WITH CAMO COLLATED EDGE + FACE SCREWS OR CAMO UNIVERSAL DECK CLIPS



MARKSMAN™

HIDDEN EDGE SCREW FASTENING SYSTEM

Achieve a fastener-free surface on square decking.

PAGES 14-15

FOR USE WITH CAMO EDGE SCREWS



ACCESSORIES



PAGES 20-21 BOARD BENDING & LOCKING TOOL

ACCESSORIES

-  POWER BITS
-  DRIVE™ + CLIPDRIVE™ T-15
-  DRIVE™ T-20
-  DRIVER BITS
-  PRE-DRILL BIT

FASTENERS FOR EVERY PROJECT

SYSTEM FASTENERS

For exclusive use with CAMO® systems



CAMO EDGE SCREWS



CAMO COLLATED EDGE + FACE SCREWS

CAMO UNIVERSAL DECK CLIPS



EXTERIOR FASTENERS

For Deck, Composite, Trim, or Structural connections.

DECK



COMPOSITE



TRIM



CODE-COMPLIANT STRUCTURAL SCREWS



TRUSS



MULTI-PLY + LEDGER FLAT HEAD SCREWS



FRAMING SCREWS



MULTI-PURPOSE FLAT HEAD SCREWS



MULTI-PURPOSE HEX HEAD SCREWS



MULTI-PURPOSE HEX HEAD SCREWS

316SS STAINLESS STEEL



305 & 316 COMPOSITE SCREWS



316 JOIST HANGER NAILS (COLLATED AVAILABLE)



305 & 316 DECK SCREWS



316 RING SHANK DECK NAILS (COLLATED AVAILABLE)



316 PAINTED TRIM SCREWS



305 & 316 TRIM SCREWS

CONTENTS

| | |
|-------------------------------------|----|
| DRIVE™ SYSTEMS | 4 |
| CLIPDRIVE | 4 |
| UNIVERSAL DECK CLIPS | 6 |
| DRIVE | 8 |
| COLLATED SCREWS | 10 |
| DRIVE SYSTEM ACCESSORIES | 12 |
| MARKSMAN SYSTEM | 14 |
| MARKSMAN TOOLS | 15 |
| EDGE SCREWS | 16 |
| MARKSMAN ACCESSORIES | 18 |
| LEVER® | 20 |
| EXTERIOR FASTENERS | 22 |
| DECK | 23 |
| COMPOSITE | 25 |
| TRIM | 28 |
| STRUCTURAL | 32 |
| EXTERIOR ACCESSORIES | 40 |
| STAINLESS STEEL FASTENERS | 42 |
| DECK SCREWS | 44 |
| COMPOSITE SCREWS | 46 |
| EDGE SCREWS | 48 |
| TRIM SCREWS | 49 |
| BITS | 52 |
| HAND DRIVE NAILS | 53 |
| COLLATED NAILS | 54 |
| COATINGS INFORMATION | 56 |
| FASTENER & TOOL SELECTOR | 58 |



CLIPDRIVE

STAND UP FASTENING TOOL FOR CAMO® UNIVERSAL DECK CLIPS

The Better Way to Fasten CAMO Universal Deck Clips.


Stand tall, target screws easily, and drive clips up to 5X faster with CAMO ClipDRIVE™, the contractor-grade tool designed to give you the best experience fastening grooved decking.

STAND-UP DECK CLIP FASTENING SYSTEM



TOOL

(p. 5)



FASTENERS

(p. 6-7)



ClipDRIVE™

- Install grooved decking up to 5X faster
- For use with CAMO® Universal Deck Clips on leading grooved deck boards
- Attaches to your drill, features an adjustable handle, and has a weighted nose for easy screw targeting
- Ergonomically designed to be easy on the body and reduce fatigue on the job
- CAMO Universal Deck Clips and the ClipDRIVE are backed by a CAMO Warranty




| SKU# | DESCRIPTION | QTY | CT./MASTER |
|---------|-------------|-----|------------|
| 0345065 | ClipDRIVE | 1 | 1 |

FASTEN WITH THE ClipDRIVE


BUILD YOUR DECK UP TO 5X FASTER USING CAMO LEVER, CLIPS AND ClipDRIVE TOGETHER.

(p.20)

CLIP



Use CAMO Universal Deck Clips (p. 6-7)

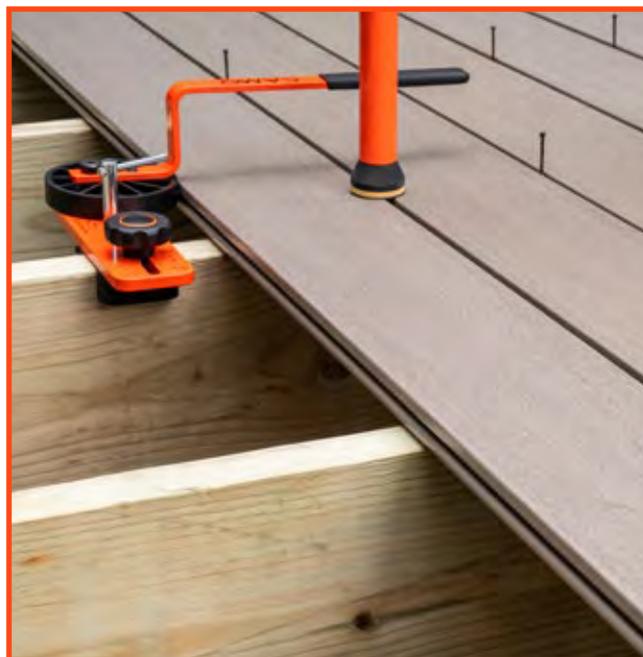



UNIVERSAL DECK CLIPS

CAMO® deck clips make installing grooved decking on wood or metal joists easy for everyone.

These hidden deck clips are designed and warranted for use with leading grooved deck boards and result in a beautiful fastener-free surface that you can install in half the time of other hidden fasteners. Fasten EDGE®, EDGEX®, and EDGEXMETAL® Clips by hand with the included NEVER-MISS™ Guide or standing up with ClipDRIVE™ and DRIVE™.



STARTER

- Secure the first and last board to achieve a completely fastener-free deck surface on wood joists
- Designed for use with leading grooved deck boards
- Screw tip bites into joist quickly
- Versatile clip can also be used as an L-bracket



| SKU# | DESCRIPTION | COVERAGE | QTY | DRIVER BIT | CT./MASTER |
|---------|--------------------------------|--------------------|-----|------------|------------|
| 0344087 | STARTER Clip - For Wood Joists | 30 lineal ft. (9m) | 25 | -- | 6 |



EDGE®

- 90° deck patterns on wood joists
- One-pass fasteners—clip sits in place on the joist until you're ready to fasten
- Clip creates 3/16 in. (4.7mm) spacing
- Gusset holds boards down
- Fasten with included NEVER-MISS™ Guide or while standing up with the CAMO ClipDRIVE™ or DRIVE™
- 304 stainless gusset, 410 stainless screw, nylon plastic spacer body



| SKU# | DESCRIPTION | QTY | COVERAGE | DRIVER BIT | CT./MASTER |
|---------|---|-----|------------------------------------|------------|------------|
| 0344354 | EDGE Clip - 90° Deck Pattern on Wood Joists | 90 | 50 sq. ft. (4.64m ²) | 1 - T-15 | 4 |
| 0344359 | | 450 | 250 sq. ft. (23.22m ²) | 2 - T-15 | 1 |
| 0344356 | | 900 | 500 sq. ft. (46.45m ²) | 2 - T-15 | 1 |



EDGEX®

- Any deck pattern on wood joists
- One-pass fasteners—clip sits in the groove of the board until you're ready to fasten
- Clip body creates 3/16 in. (4.7mm) spacing
- Gusset holds boards down
- Fasten with included NEVER-MISS™ Guide or while standing up with the CAMO ClipDRIVE™ or DRIVE™
- 304 stainless gusset, 410 stainless screw, nylon plastic spacer body



| SKU# | DESCRIPTION | QTY | COVERAGE | DRIVER BIT | CT./MASTER |
|---------|--|-----|------------------------------------|------------|------------|
| 0344554 | EDGEX Clip - Any Deck Pattern on Wood Joists | 90 | 50 sq. ft. (4.64m ²) | 1 - T-15 | 4 |
| 0344559 | | 450 | 250 sq. ft. (23.22m ²) | 2 - T-15 | 1 |
| 0344556 | | 900 | 500 sq. ft. (46.45m ²) | 2 - T-15 | 1 |



EDGEXMETAL®

- Any deck pattern on 14-18GA metal joists
- One-pass fasteners—clip sits in the groove of the board until you're ready to fasten
- Clip body creates 3/16 in. (4.7mm) spacing
- Gusset holds boards down
- Fasten with included NEVER-MISS™ Guide or while standing up with the CAMO ClipDRIVE™ or DRIVE™
- 304 stainless gusset, 410 stainless screw, nylon plastic spacer body



| SKU# | DESCRIPTION | QTY | COVERAGE | DRIVER BIT | CT./MASTER |
|---------|---------------------------------------|-----|------------------------------------|------------|------------|
| 0344574 | EDGEXMETAL Clip 14-18GA Metal Framing | 90 | 50 sq. ft. (4.64m ²) | 1 - T-15 | 4 |
| 0344579 | | 450 | 250 sq. ft. (23.22m ²) | 2 - T-15 | 1 |



DRIVE[™]

STAND UP FASTENING TOOL FOR CAMO COLLATED EDGE SCREWS, FACE SCREWS AND DECK CLIPS

Stand up, save your back and knees, and save your time with the award-winning CAMO[®] DRIVE[™] tool.

Fasten square and grooved deck boards with the CAMO DRIVE tool, featuring three interchangeable nose pieces to install Collated Edge and Face Screws and CAMO Universal Deck Clips.

STAND-UP DECK FASTENING SYSTEM



TOOL
(p. 9)



FASTENERS
(p. 6-7 & 10-11)



ACCESSORIES
(p. 12)




DRIVE™

- Attaches to your drill
- Use with CAMO Collated Edge Screws, Collated Face Screws, and CAMO Universal Deck Clips
- Fasten square® pressure treated, KDAT, cedar, redwood, composite, PVC, and grooved deck boards
- Easy to use, featuring a reversible handle and quick-change nose pieces
- Stand-up fastening allows for fast installations that are easy on the body



| SKU# | DESCRIPTION | QTY | CT./MASTER |
|---------|-------------|-----|------------|
| 0345060 | DRIVE | 1 | 1 |

THREE WAYS TO FASTEN WITH DRIVE

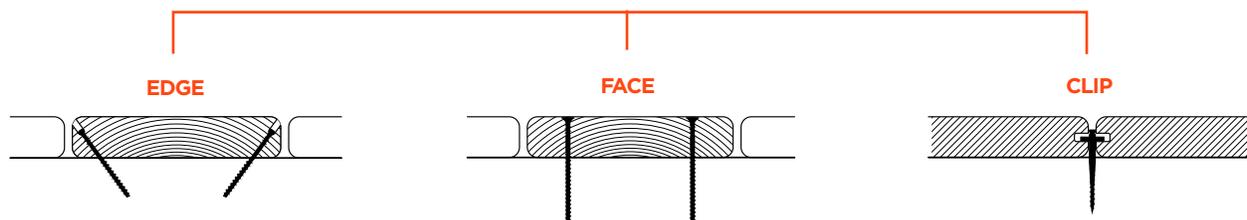

Use the Edge nose piece with CAMO Collated Edge Screws (p. 11)



Use the Face nose piece with CAMO Collated Face Screws (p. 11)



Use the Clip nose piece with CAMO Universal Deck Clips (p. 6-7)

*For most square decking installs, we recommend using secondary spacers to allow for expansion, contraction, and drainage.




COLLATED SCREWS

CAMO Collated screws are exclusively designed for use with the DRIVE tool.

Each fastener was intentionally created and collated for peak performance in its given application. Collated screws are available in 1000 ct. quantities, which cover 285 sq. ft. (26.48 m²) and come with their corresponding driver bits: T-15 for Edge Screws and T-20 for Face Screws.




FOR EXCLUSIVE USE WITH DRIVE TOOL

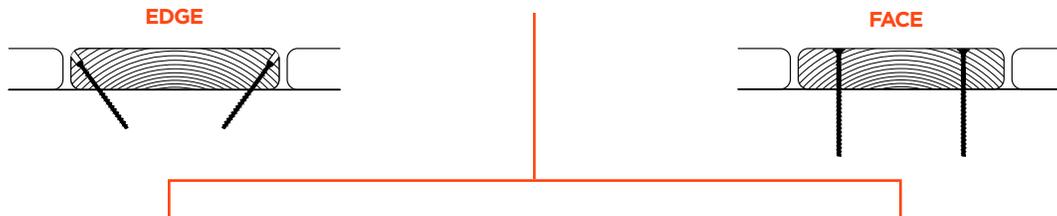

FOR USE WITH T-15 BIT + EDGE NOSE PIECE

FOR USE WITH T-20 BIT + FACE NOSE PIECE

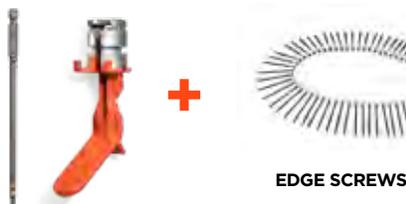



COLLATED EDGE SCREWS (WOOD & NON-CAPPED COMPOSITE)

- For use with DRIVE and Edge nose piece (orange)
- 2-3/8 in. (60.3 mm) screw secures 1-1-1/2 in. (25.4-38.1mm) thick pressure treated, cedar, redwood, uncapped composite, and PVC deck boards
- Rake tip augers material out reducing splitting and cracking, trimhead reduces visibility
- T-15 Star Drive limits cam-outs



| SKU# | DESCRIPTION | COATING/ALLOY | SIZE | QTY | DRIVER BIT | CT/MASTER |
|----------|--------------------------------|---------------------|--------------------|------|------------|-----------|
| 0395010 | Collated Edge Screws for DRIVE | PROTECH | 2-3/8 in. (60.3mm) | 1000 | 2 - T-15 | 1 |
| 0395020S | | 316 Stainless Steel | 2-3/8 in. (60.3mm) | 1000 | 2 - T-15 | 1 |



COLLATED FACE SCREWS (PRESSURE TREATED)

- For use with DRIVE and Face nose piece (black)
- 3 in. (76.2mm) screw secures pressure treated boards up to 1-1/2 in. (38.1 mm) thick
- Rake tip augers material out, reducing splitting, and buglehead draws the board tight
- T-20 Star Drive limits cam-outs



| SKU# | DESCRIPTION | COLOR | SIZE | QTY | DRIVER BIT | CT/MASTER |
|---------|---|-------|----------------------|------|------------|-----------|
| 0395040 | Collated Wood Face Screws for DRIVE - PROTECH | Green | 3 in. x #10 (76.2mm) | 1000 | 2 - T-20 | 1 |
| 0395042 | | Tan | 3 in. x #10 (76.2mm) | 1000 | 2 - T-20 | 1 |
| 0395047 | | Red | 3 in. x #10 (76.2mm) | 1000 | 2 - T-20 | 1 |



COLLATED FACE SCREWS (COMPOSITE)

- For use with DRIVE and Face nose piece (black)
- 2-1/2 in. (63.5mm) screw secures 1 in. (25.4mm) thick composite and PVC deck boards
- Slash point drives quickly, cutting lead edge creates a flush finish
- T-20 Star Drive limits cam-outs



COLOR MATCHER
Use the color matcher on camofasteners.com to find the right color for your board.



| SKU# | DESCRIPTION | COLOR | SIZE | QTY | DRIVER BIT | CT/MASTER |
|---------|---|--------|--------------------------|------|------------|-----------|
| 0395050 | Collated Composite Face Screws for DRIVE - PROTECH | Brown | 2-1/2 in. x #10 (63.5mm) | 1000 | 2 - T-20 | 1 |
| 0395060 | | Grey | 2-1/2 in. x #10 (63.5mm) | 1000 | 2 - T-20 | 1 |
| 0395070 | | Tan | 2-1/2 in. x #10 (63.5mm) | 1000 | 2 - T-20 | 1 |
| 0395080 | Collated Composite Face Screws for DRIVE- 305 Stainless Steel | Bright | 2-1/2 in. x #10 (63.5mm) | 1000 | 2 - T-20 | 1 |

DRIVE SYSTEM ACCESSORIES

Driver bits are engineered specifically for use with the CAMO DRIVE and ClipDRIVE tools. The bits engage quickly and easily with the screw heads with reduced cam-outs, and are color-coded with a band for quick identification—orange and yellow for Edge and Clip fastening, black for Face fastening.

T-15 BIT



- For use with CAMO DRIVE for Edge or Clip fastening and the CAMO ClipDRIVE
- 6.25 in. (160mm) long
- T-15 Star Drive



| SKU# | DESCRIPTION | QTY | CT./MASTER |
|---------|----------------------|------|------------|
| 0395715 | T-15 Bit Replacement | 2/pk | 4 |

T-20 BIT



- For use with CAMO DRIVE for Face fastening
- 6.25 in. (160mm) long
- T-20 Star Drive



| SKU# | DESCRIPTION | QTY | CT./MASTER |
|---------|----------------------|------|------------|
| 0395720 | T-20 Bit Replacement | 2/pk | 4 |

NOSE PIECES



- Replacement nose pieces for use with CAMO DRIVE
- Edge (orange) for fastening Collated Edge Screws
- Clip (yellow-banded silver) for fastening Universal Deck Clips
- Face (black) for fastening Collated Composite and Wood Face Screws



| SKU# | DESCRIPTION | QTY |
|---------|-----------------------------|-----|
| 0395801 | Replacement Edge Nose Piece | 1 |
| 0395805 | Replacement Clip Nose Piece | 1 |
| 0395803 | Replacement Face Nose Piece | 1 |






MARKSMAN SYSTEM

Achieve a fastener-free surface on square decking with this easy and affordable hidden fastening system.

MARKSMAN Tools automatically establish spacing between boards and direct CAMO Edge Screws into the edge of the board, leaving a smooth deck surface. Plus, the MARKSMAN System is backed by a CAMO warranty for use in leading deck boards.

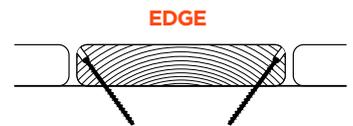

HIDDEN FASTENER SYSTEM



TOOLS

p. 15



FASTENERS

p. 16-17



ACCESSORIES

p. 18



MARKSMAN PRO®

- For use with CAMO Edge Screws on square composite, PVC, capped composite, cedar, redwood, hardwood, and KDAT deck boards
- Fits most 5-¼ in. (133mm) to 5-¾ in. (146mm) boards
- Creates 3/16 in. (4.7mm) spacing



| SKU# | DESCRIPTION | QTY | CT./MASTER |
|---------|--------------|-----|------------|
| 0345001 | MARKSMAN Pro | 1 | 6 |



MARKSMAN PRO®-X1

- For use with CAMO Edge Screws on pressure treated deck boards
- Fits most 5-¼ in. (133mm) to 5-¾ in. (146mm) boards
- Creates 1/16 in. (1.59mm) spacing



| SKU# | DESCRIPTION | QTY | CT./MASTER |
|---------|-------------------|-----|------------|
| 0345002 | MARKSMAN Pro - X1 | 1 | 6 |



MARKSMAN PRO®-NB

- For use with CAMO Edge Screws on square composite, PVC, capped composite, cedar, redwood, hardwood, and KDAT narrow deck boards
- Fits most 3-¼ in. (83mm) to 5 in. (127mm) boards
- Creates 3/16 in. (4.7mm) spacing



| SKU# | DESCRIPTION | QTY | CT./MASTER |
|---------|-------------------|-----|------------|
| 0345015 | MARKSMAN Pro - NB | 1 | 6 |



MARKSMAN® EDGE

- For use with CAMO Edge Screws on pressure treated deck boards
- Single-shot tool attaches to your drill
- Tool leaves no spacing between boards




| SKU# | DESCRIPTION | QTY | CT./MASTER |
|---------|---------------|-----|------------|
| 0345020 | MARKSMAN Edge | 1 | 6 |



EDGE SCREWS

The Best Deck Screws You'll Never See.

CAMO Edge Screws are an innovative, easy-to-install hidden fastener that delivers a high-end look at an affordable price. They are for exclusive use with MARKSMAN Pro tools. Edge Screws feature a patented rake tip that augers material out as you drive to reduce board splitting and a trimhead to reduce visibility. They are available in CAMO's proprietary PROTECH coating and 316 Stainless Steel.

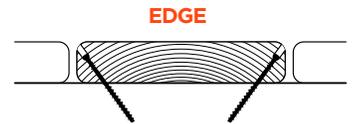

PROTECH COATED

PROTECH is our coating that is suitable for use with pressure treated lumber, PVC, composite, and capped composite deck boards in inland environments that face regular exposure to the elements.



316 STAINLESS STEEL MARINE GRADE

316 Stainless Steel is the best fastener for any project and is required for installations in highly corrosive areas like structures that are near saltwater, or that will be exposed to harsh chemicals like chlorine, wood strippers, or ice melt.

| DECK BOARD MATERIAL | RECOMMENDED CAMO EDGE SCREW |
|-------------------------------|--|
| Pressure Treated Lumber | Stainless Steel or PROTECH Coated |
| Composite | Stainless Steel or PROTECH Coated |
| Capped Composite | Stainless Steel or PROTECH Coated (with pre-drilling) |
| PVC | Stainless Steel or PROTECH Coated |
| Cedar | Stainless Steel Required |
| Redwood | Stainless Steel Required |
| Hardwood or Imported Hardwood | Stainless Steel Required (with pre-drilling) |

EDGE SCREWS

- For use with all square deck boards, including pressure treated, composite, PVC, capped composite, cedar, redwood, and hardwood
- Features a patented rake tip that augers material out as they're driven, reducing the potential for splitting and cracking*
- T-15 Star Drive offers best connection, reducing cam-outs and stripped screws
- Trimhead reduces visibility on the edge of the board
- Available in PROTECH coating and 316 Stainless Steel



*Pre-drilling is required for hardwoods and capped composites

PROTECH COATED



| SKU# | SIZE | QTY | COVERAGE | DRIVER BIT | CT./MASTER |
|---------|-------------------------|------|------------------------------------|------------|------------|
| 0345120 | 1-7/8 in. (47.6mm) x #7 | 100 | 30 sq. ft. (2.79m ²) | -- | 12 |
| 0345128 | | 350 | 100 sq. ft. (9.29m ²) | 1 - T-15 | 12 |
| 0345124 | | 700 | 200 sq. ft. (18.58m ²) | 2 - T-15 | 4 |
| 0345119 | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-15 | 4 |
| 0345140 | 2-3/8 in. (60.3mm) x #7 | 100 | 30 sq. ft. (2.79m ²) | -- | 12 |
| 0345148 | | 350 | 100 sq. ft. (9.29m ²) | 1 - T-15 | 12 |
| 0345144 | | 700 | 200 sq. ft. (18.58m ²) | 2 - T-15 | 4 |
| 0345139 | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-15 | 4 |

316 STAINLESS STEEL MARINE GRADE



| SKU# | SIZE | QTY | COVERAGE | DRIVER BIT | CT./MASTER |
|----------|-------------------------|------|------------------------------------|------------|------------|
| 0345220S | 1-7/8 in. (47.6mm) x #7 | 100 | 30 sq. ft. (2.79m ²) | -- | 12 |
| 0345228S | | 350 | 100 sq. ft. (9.29m ²) | 1 - T-15 | 12 |
| 0345224S | | 700 | 200 sq. ft. (18.58m ²) | 2 - T-15 | 4 |
| 0345219S | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-15 | 1 |
| 0345240S | 2-3/8 in. (60.3mm) x #7 | 100 | 30 sq. ft. (2.79m ²) | -- | 12 |
| 0345248S | | 350 | 100 sq. ft. (9.29m ²) | 1 - T-15 | 12 |
| 0345244S | | 700 | 200 sq. ft. (18.58m ²) | 2 - T-15 | 4 |
| 0345239S | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-15 | 1 |

MARKSMAN ACCESSORIES

Driver Bits are engineered specifically for use with CAMO Edge Screws and MARKSMAN Pro[®] tools. The built-in shoulder sets automatic depth of drive for maximum holding power, and prevents over-driving the screw.

DRIVER BITS SQUARE BOARDS



- For use with MARKSMAN Pro[®] tools and Edge Screws
- 3 in. (76.2 mm) long
- T-15 Star Drive



| SKU# | DESCRIPTION | QTY | CT./MASTER |
|---------|-------------|------|------------|
| 0345099 | Driver Bit | 2/pk | 10 |

DRIVER BITS GROOVED BOARDS



- For use with MARKSMAN Pro[®] tools and Edge Screws
- 3 in. (76.2 mm) long
- T-15 Star Drive



| SKU# | DESCRIPTION | QTY | CT./MASTER |
|---------|------------------------------|------|------------|
| 0345089 | Driver Bit for Grooved Board | 2/pk | 10 |

PRE-DRILL BITS



- For use with MARKSMAN Pro[®] tools
- Pre-drilling is required for capped composite and hardwood
- 3-5/8 in. (92mm) long



| SKU# | DESCRIPTION | QTY | CT./MASTER |
|---------|---------------|------|------------|
| 0345035 | Pre-Drill Bit | 2/pk | 10 |





LEVER®

BOARD BENDING AND LOCKING TOOL

Build a better deck by yourself with LEVER®, the one-turn tool that locks-in rows of boards and clips and straightens warped boards.



- Speeds up grooved deck installs—locks-in rows of boards and clips before fastening
- Strong enough to straighten any warped board
- Easily adjusts to wood and metal joists 1-½–3 in. wide for jobsite versatility
- Multi-directional lever locks in one turn



| SKU# | DESCRIPTION | QTY | CT./MASTER |
|---------|-------------|-----|------------|
| 0345070 | LEVER | 1 | 4 |



LOCKS BOARDS & CLIPS

Use 2-4 LEVER tools across the length of the deck for the best clip installation experience with consistent spacing.

BENDS WARPED BOARDS

One LEVER is strong enough to straighten out warped pressure treated and hardwood boards in one turn.



ANY JOIST MATERIAL

Works on wood and metal joists



ANY JOIST WIDTH

Adjusts to joists 1-½ to 3 in. wide



ANY BOARD TYPE

Straightens and locks any board at any angle

ONE TOOL FOR EVERY JOB



EXTERIOR FASTENERS

CAMO offers a high-quality line of exterior fasteners that deliver on reliability no matter the project.

CAMO fasteners start fast, hold strong, and create long-lasting connections. Our fasteners are coated with high-performance exterior-grade coatings, and can be used on interior projects as well. Our comprehensive line includes Deck, Composite, Trim, and new code-compliant Structural screws along with a line of marine-grade Stainless Steel fasteners. Make CAMO your one-stop shop for all your performance screw needs.

RECOMMENDED APPLICATIONS FOR EACH SCREW TYPE

|  DECK |  COMPOSITE |  TRIM |  NAILS |  NEW CODE-COMPLIANT STRUCTURAL |
|---|--|--|--|--|
| <ul style="list-style-type: none"> • Wood decking projects • Fences • Any exterior wood-to-wood connection <p>(p. 23-24)</p> | <ul style="list-style-type: none"> • Composite decking projects • PVC decking projects <p>(p. 24-27)</p> | <ul style="list-style-type: none"> • Wood and PVC Decking • Exterior trim • Deck rails • Balusters • Fences <p>(p. 28-31)</p> | <ul style="list-style-type: none"> • Wood patios • Wood decks • Other exterior wood to wood connections in corrosive environments <p>(p. 55-56)</p> |  <ul style="list-style-type: none"> • Truss • Multi-Ply • Multi-Ply + Ledger • Framing • Multi-Purpose <p>(p. 32-43)</p> |

CAMO Exterior Fasteners also for Interior use

STAINLESS STEEL

CAMO offers a comprehensive line of Stainless Steel screws and nails to help you build a better deck in corrosive environments.

305 STAINLESS STEEL

Great corrosion resistance for most inland exterior projects.

316SS MARINE GRADE

Best corrosion resistance for projects in highly corrosive environments.

DECK SCREWS

- For any wood-to-wood connection
- Type 17 slash point starts fast and reduces splitting
- Buglehead and 2/3 thread design draw the board tight
- Star Drive provides more points of contact, reducing cam-outs
- Available in green and tan PROTECH coating to blend into wood surfaces, and 305 Stainless Steel and 316 Stainless Steel for maximum corrosion resistance

PROTECH COATED Deck Screws



| GREEN SKU# | TAN SKU# | SIZE | QTY | COVERAGE | DRIVER BIT | CT./MASTER |
|------------|----------|------------------------|------|------------------------------------|------------|------------|
| 0341070 | 0356070 | 1-¼ in. (31.8mm) x #7 | 100 | 30 sq. ft. (2.79m ²) | 1 - T-20 | 12 |
| 0341074 | 0356074 | | 350 | 100 sq. ft. (9.29m ²) | 1 - T-20 | 4 |
| 0341100 | 0356100 | 1-⅝ in. (41.3mm) x #8 | 100 | 30 sq. ft. (2.79m ²) | 1 - T-20 | 12 |
| 0341104 | 0356104 | | 350 | 100 sq. ft. (9.29m ²) | 1 - T-20 | 4 |
| 0341109 | 0356109 | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-20 | 1 |
| 0341130 | 0356130 | 2 in. (50.8mm) x #8 | 100 | 30 sq. ft. (2.79m ²) | 1 - T-20 | 12 |
| 0341134 | 0356134 | | 350 | 100 sq. ft. (9.29m ²) | 1 - T-20 | 4 |
| 0341139 | 0356139 | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-20 | 1 |
| 0341150 | 0356150 | 2-½ in. (63.5mm) x #9 | 100 | 30 sq. ft. (2.79m ²) | 1 - T-25 | 12 |
| 0341154 | 0356154 | | 350 | 100 sq. ft. (9.29m ²) | 1 - T-25 | 4 |
| 0341159 | 0356159 | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-25 | 1 |
| 0341170 | 0356170 | 3 in. (76.2mm) x #9 | 100 | 30 sq. ft. (2.79m ²) | 1 - T-25 | 12 |
| 0341174 | 0356174 | | 350 | 100 sq. ft. (9.29m ²) | 1 - T-25 | 4 |
| 0341179 | 0356179 | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-25 | 1 |
| 0341190 | 0356190 | 3-½ in. (88.9mm) x #10 | 50 | 15 sq. ft. (1.39m ²) | 1 - T-25 | 12 |
| 0341194 | 0356194 | | 250 | 70 sq. ft. (6.5m ²) | 1 - T-25 | 4 |
| 0341199 | 0356199 | | 1350 | 385 sq. ft. (35.77m ²) | 2 - T-25 | 1 |
| 0341200 | 0356200 | 4 in. (101.6mm) x #10 | 50 | 15 sq. ft. (1.39m ²) | 1 - T-25 | 12 |
| 0341204 | 0356204 | | 250 | 70 sq. ft. (6.5m ²) | 1 - T-25 | 4 |
| 0341209 | 0356209 | | 1350 | 385 sq. ft. (35.77m ²) | 2 - T-25 | 1 |
| 0341220 | 0356220 | 5 in. (127mm) x #12 | 30 | 9 sq. ft. (0.84m ²) | 1 - T-25 | 10 |
| 0341224 | 0356224 | | 100 | 30 sq. ft. (2.79m ²) | 1 - T-25 | 4 |
| 0341229 | 0356229 | | 250 | 70 sq. ft. (6.5m ²) | 1 - T-25 | 1 |
| 0341240 | 0356240 | 6 in. (152.4mm) x #12 | 30 | 9 sq. ft. (0.84m ²) | 1 - T-25 | 10 |
| 0341244 | 0356224 | | 100 | 30 sq. ft. (2.79m ²) | 1 - T-25 | 4 |
| 0341249 | 0356249 | | 250 | 70 sq. ft. (6.5m ²) | 1 - T-25 | 1 |

For more information on coatings, go to pg. 56

305 STAINLESS STEEL

Deck Screws



| SKU# | SIZE | QTY | COVERAGE | DRIVER BIT | CT./MASTER |
|----------|--------------------------|------|------------------------------------|------------|------------|
| 0348100* | 1-5/8 in. (41.3mm) x #8 | 100 | 30 sq. ft. (2.79m ²) | 1 - T-25 | 12 |
| 0348104* | | 350 | 100 sq. ft. (9.29m ²) | 1 - T-25 | 4 |
| 0348109* | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-25 | 1 |
| 0348130* | 2 in. (50.8mm) x #8 | 100 | 30 sq. ft. (2.79m ²) | 1 - T-25 | 12 |
| 0348134* | | 350 | 100 sq. ft. (9.29m ²) | 1 - T-25 | 4 |
| 0348139* | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-25 | 1 |
| 0348150 | 2-1/2 in. (63.5mm) x #10 | 100 | 30 sq. ft. (2.79m ²) | 1 - T-25 | 12 |
| 0348154 | | 350 | 100 sq. ft. (9.29m ²) | 1 - T-25 | 4 |
| 0348159 | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-25 | 1 |
| 0348170 | 3 in. (76.2mm) x #10 | 100 | 30 sq. ft. (2.79m ²) | 1 - T-25 | 12 |
| 0348174 | | 350 | 100 sq. ft. (9.29m ²) | 1 - T-25 | 4 |
| 0348179 | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-25 | 1 |
| 0348190* | 3-1/2 in. (88.9mm) x #10 | 50 | 30 sq. ft. (2.79m ²) | 1 - T-25 | 12 |
| 0348194* | | 250 | 100 sq. ft. (9.29m ²) | 1 - T-25 | 4 |
| 0348199* | | 1350 | 500 sq. ft. (46.45m ²) | 2 - T-25 | 1 |
| 0348200* | 4 in. (101.6mm) x #10 | 50 | 30 sq. ft. (2.79m ²) | 1 - T-25 | 12 |
| 0348204* | | 250 | 100 sq. ft. (9.29m ²) | 1 - T-25 | 4 |
| 0348209* | | 1350 | 500 sq. ft. (46.45m ²) | 2 - T-25 | 1 |

316 STAINLESS STEEL MARINE GRADE

Deck Screws



| SKU# | SIZE | QTY | COVERAGE | DRIVER BIT | CT./MASTER |
|----------|--------------------------|------|------------------------------------|------------|------------|
| 0348100S | 1-5/8 in. (41.3mm) x #9 | 100 | 30 sq. ft. (2.79m ²) | 1 - T-25 | 12 |
| 0348104S | | 350 | 100 sq. ft. (9.29m ²) | 1 - T-25 | 4 |
| 0348130S | 2 in. (50.8mm) x #9 | 100 | 30 sq. ft. (2.79m ²) | 1 - T-25 | 12 |
| 0348134S | | 350 | 100 sq. ft. (9.29m ²) | 1 - T-25 | 4 |
| 0348139S | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-25 | 1 |
| 0348150S | 2-1/2 in. (63.5mm) x #10 | 100 | 30 sq. ft. (2.79m ²) | 1 - T-25 | 12 |
| 0348154S | | 350 | 100 sq. ft. (9.29m ²) | 1 - T-25 | 4 |
| 0348159S | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-25 | 1 |
| 0348170S | 3 in. (76.2mm) x #10 | 100 | 30 sq. ft. (2.79m ²) | 1 - T-25 | 12 |
| 0348174S | | 350 | 100 sq. ft. (9.29m ²) | 1 - T-25 | 4 |
| 0348179S | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-25 | 1 |
| 0348190S | 3-1/2 in. (88.9mm) x #10 | 50 | 15 sq. ft. (1.39m ²) | 1 - T-25 | 12 |
| 0348194S | | 250 | 70 sq. ft. (6.5m ²) | 1 - T-25 | 4 |
| 0348199S | | 1350 | 385 sq. ft. (35.77m ²) | 2 - T-25 | 1 |

For more information on coatings, go to pg. 56

COMPOSITE SCREWS

- Color-matched screws for composite and PVC decking projects
- Type 99 double slash point augers board material out for fast driving
- Trilobular shank reduces torque and prevents mushrooming
- Reverse thread at top increases pull-down power while cutting lead edge creates a flush finish
- T-20 Star Drive provides more points of contact, reducing cam-outs and limiting bit wear
- Available in PROTECH coating and 316 Stainless Steel for maximum corrosion resistance



COLOR MATCHER

Our Composite screws are available in painted finishes to match popular deck boards. Use the color matcher on camofasteners.com to find the right color for your board.

PROTECH COATED Composite Screws



| SKU# | SIZE | QTY | COVERAGE | DRIVER BIT | CT./MASTER | COLOR |
|---------|------------------------|------|------------------------------------|------------|------------|------------|
| 0349250 | 2-½ in. (63.5mm) x #10 | 100 | 30 sq. ft. (2.79m ²) | 1 - T-20 | 12 | Brown |
| 0349254 | | 350 | 100 sq. ft. (9.29m ²) | 1 - T-20 | 4 | |
| 0349259 | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-20 | 1 | |
| 0349350 | 2-½ in. (63.5mm) x #10 | 100 | 30 sq. ft. (2.79m ²) | 1 - T-20 | 12 | Cedar |
| 0349354 | | 350 | 100 sq. ft. (9.29m ²) | 1 - T-20 | 4 | |
| 0349359 | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-20 | 1 | |
| 0349050 | 2-½ in. (63.5mm) x #10 | 100 | 30 sq. ft. (2.79m ²) | 1 - T-20 | 12 | Dark Brown |
| 0349054 | | 350 | 100 sq. ft. (9.29m ²) | 1 - T-20 | 4 | |
| 0349059 | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-20 | 1 | |

For more information on coatings, go to pg. 56

PROTECH COATED Composite Screws



| SKU# | SIZE | QTY | COVERAGE | DRIVER BIT | CT./MASTER | COLOR |
|----------|------------------------|------|------------------------------------|------------|------------|------------|
| 0349450 | 2-½ in. (63.5mm) x #10 | 100 | 30 sq. ft. (2.79m ²) | 1 - T-20 | 12 | Grey |
| 0349454 | | 350 | 100 sq. ft. (9.29m ²) | 1 - T-20 | 4 | |
| 0349459 | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-20 | 1 | |
| 0349550 | 2-½ in. (63.5mm) x #10 | 100 | 30 sq. ft. (2.79m ²) | 1 - T-20 | 12 | Redwood |
| 0349554 | | 350 | 100 sq. ft. (9.29m ²) | 1 - T-20 | 4 | |
| 0349559 | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-20 | 1 | |
| 0349750 | 2-½ in. (63.5mm) x #10 | 100 | 30 sq. ft. (2.79m ²) | 1 - T-20 | 12 | Sand |
| 0349754 | | 350 | 100 sq. ft. (9.29m ²) | 1 - T-20 | 4 | |
| 0349759 | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-20 | 1 | |
| 0349950 | 2-½ in. (63.5mm) x #10 | 100 | 30 sq. ft. (2.79m ²) | 1 - T-20 | 12 | Stone Grey |
| 0349954 | | 350 | 100 sq. ft. (9.29m ²) | 1 - T-20 | 4 | |
| 0349959 | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-20 | 1 | |
| 0349150 | 2-½ in. (63.5mm) x #10 | 100 | 30 sq. ft. (2.79m ²) | 1 - T-20 | 12 | Tan |
| 0349154 | | 350 | 100 sq. ft. (9.29m ²) | 1 - T-20 | 4 | |
| 0349159 | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-20 | 1 | |
| 0349850 | 2-½ in. (63.5mm) x #10 | 100 | 30 sq. ft. (2.79m ²) | 1 - T-20 | 12 | Winchester |
| 0349854 | | 350 | 100 sq. ft. (9.29m ²) | 1 - T-20 | 4 | |
| 0349859 | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-20 | 1 | |
| 0349000G | 2-½ in. (63.5mm) x #10 | 100 | 30 sq. ft. (2.79m ²) | 1 - T-20 | 12 | Dark Grey |
| 0349004G | | 350 | 100 sq. ft. (9.29m ²) | 1 - T-20 | 4 | |
| 0349009G | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-20 | 1 | |

For more information on coatings, go to pg. 56

316 STAINLESS STEEL MARINE GRADE

Composite Screws



| SKU# | SIZE | QTY | COVERAGE | DRIVER BIT | CT./MASTER | COLOR | |
|-----------|------------------------|------|------------------------------------|------------|------------|------------|--|
| 0367158BS | 2-½ in. (63.5mm) x #10 | 350 | 100 sq. ft. (9.29m ²) | 1 - T-20 | 4 | Brown | |
| 0367159BS | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-20 | 1 | | |
| 0367158CS | 2-½ in. (63.5mm) x #10 | 350 | 100 sq. ft. (9.29m ²) | 1 - T-20 | 4 | Cedar | |
| 0367159CS | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-20 | 1 | | |
| 0367158ES | 2-½ in. (63.5mm) x #10 | 350 | 100 sq. ft. (9.29m ²) | 1 - T-20 | 4 | Grey | |
| 0367159ES | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-20 | 1 | | |
| 0367158DS | 2-½ in. (63.5mm) x #10 | 350 | 100 sq. ft. (9.29m ²) | 1 - T-20 | 4 | Dark Brown | |
| 0367159DS | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-20 | 1 | | |
| 0367158NS | 2-½ in. (63.5mm) x #10 | 350 | 100 sq. ft. (9.29m ²) | 1 - T-20 | 4 | Stone Grey | |
| 0367159NS | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-20 | 1 | | |
| 0367158RS | 2-½ in. (63.5mm) x #10 | 350 | 100 sq. ft. (9.29m ²) | 1 - T-20 | 4 | Redwood | |
| 0367159RS | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-20 | 1 | | |
| 0367158SS | 2-½ in. (63.5mm) x #10 | 350 | 100 sq. ft. (9.29m ²) | 1 - T-20 | 4 | Sand | |
| 0367159SS | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-20 | 1 | | |
| 0367158TS | 2-½ in. (63.5mm) x #10 | 350 | 100 sq. ft. (9.29m ²) | 1 - T-20 | 4 | Tan | |
| 0367159TS | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-20 | 1 | | |
| 0367158WS | 2-½ in. (63.5mm) x #10 | 350 | 100 sq. ft. (9.29m ²) | 1 - T-20 | 4 | Winchester | |
| 0367159WS | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-20 | 1 | | |
| 0367158GS | 2-½ in. (63.5mm) x #10 | 350 | 100 sq. ft. (9.29m ²) | 1 - T-20 | 4 | Dark Grey | |
| 0367159GS | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-20 | 1 | | |
| 0367158S | 2-½ in. (63.5mm) x #10 | 350 | 100 sq. ft. (9.29m ²) | 1 - T-20 | 4 | Bright | |
| 0367159S | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-20 | 1 | | |

TRIM SCREWS

- For exterior deck, trim, and finish applications with wood and PVC
- Type 17 slash point starts fast with no pre-drilling
- Trimhead screw reduces visibility in finish projects
- T-15 Star Drive provides more points of contact, reducing cam-outs and limiting bit wear
- Available in green PROTECH coating to blend into wood surfaces, bright 305 and 316 Stainless Steel, and painted 316 Stainless Steel

PROTECH COATED Trim Screws



| SKU# | SIZE | QTY | DRIVER BIT | CT./MASTER | HEAD |
|---------|-------------------------|------|------------|------------|------|
| 0346100 | 1-5/8 in. (41.3mm) x #7 | 100 | 1 - T-15 | 12 | |
| 0346104 | | 350 | 1 - T-15 | 4 | |
| 0346130 | 2 in. (50.8mm) x #7 | 100 | 1 - T-15 | 12 | |
| 0346134 | | 350 | 1 - T-15 | 4 | |
| 0346150 | 2-1/2 in. (63.5mm) x #7 | 100 | 1 - T-15 | 12 | |
| 0346154 | | 350 | 1 - T-15 | 4 | |
| 0346159 | | 1750 | 1 - T-15 | 1 | |
| 0346170 | 3 in. (76.2mm) x #7 | 100 | 1 - T-15 | 12 | |
| 0346174 | | 350 | 1 - T-15 | 4 | |
| 0346190 | 3-1/2 in. (88.9mm) x #8 | 100 | 1 - T-15 | 12 | |
| 0346194 | | 350 | 1 - T-15 | 4 | |

For more information on coatings, go to pg. 56

305 STAINLESS STEEL

Trim Screws



| SKU# | SIZE | QTY | DRIVER BIT | CT./MASTER |
|----------|-------------------------|-----|------------|------------|
| O350100* | 1-5/8 in. (41.3mm) x #8 | 100 | 1 - T-15 | 12 |
| O350104* | | 350 | 1 - T-15 | 4 |
| O350130* | 2 in. (50.8mm) x #8 | 100 | 1 - T-15 | 12 |
| O350134* | | 350 | 1 - T-15 | 4 |
| O350150* | 2-1/2 in. (63.5mm) x #8 | 100 | 1 - T-15 | 12 |
| O350154* | | 350 | 1 - T-15 | 4 |
| O350170* | 3 in. (76.2mm) x #8 | 100 | 1 - T-15 | 12 |
| O350174* | | 350 | 1 - T-15 | 4 |

316 STAINLESS STEEL MARINE GRADE

Trim Screws



| SKU# | SIZE | QTY | DRIVER BIT | CT./MASTER | HEAD |
|----------|-------------------------|-----|------------|------------|------|
| O350100S | 1-5/8 in (41.3mm) x #8 | 100 | 1 - T-15 | 12 | |
| O350104S | | 350 | 1 - T-15 | 4 | |
| O350130S | 2 in. (50.8mm) x #8 | 100 | 1 - T-15 | 12 | |
| O350134S | | 350 | 1 - T-15 | 4 | |
| O350150S | 2-1/2 in. (63.5mm) x #8 | 100 | 1 - T-15 | 12 | |
| O350154S | | 350 | 1 - T-15 | 4 | |
| O350170S | 3 in. (76.2mm) x #8 | 100 | 1 - T-15 | 12 | |
| O350174S | | 350 | 1 - T-15 | 4 | |
| O350190S | 3-1/2 in. (88.9mm) x #8 | 100 | 1 - T-15 | 12 | |
| O350194S | | 350 | 1 - T-15 | 4 | |

For more information on coatings, go to pg. 56

316 STAINLESS STEEL MARINE GRADE - PAINTED

Trim Screws



COLOR MATCHER

Our Stainless Steel Trim screws are available in painted finishes to match popular deck boards.

Use the color matcher on camofasteners.com to find the right color for your board.

| SKU# | SIZE | QTY | DRIVER BIT | CT./MASTER | COLOR | |
|-----------|-------------------------|------|------------|------------|------------|--|
| 0353000ES | 1-5/8 in. (41.3mm) x #8 | 100 | 1 - T-15 | 12 | Grey | |
| 0353004ES | | 350 | 1 - T-15 | 4 | | |
| 0353009ES | | 1750 | 2 - T-15 | 1 | | |
| 0353050ES | 2-1/2 in. (63.5mm) x #8 | 100 | 1 - T-15 | 12 | | |
| 0353054ES | | 350 | 1 - T-15 | 4 | | |
| 0353059ES | | 1750 | 2 - T-15 | 1 | | |
| 0353000RS | 1-5/8 in. (41.3mm) x #8 | 100 | 1 - T-15 | 12 | Redwood | |
| 0353004RS | | 350 | 1 - T-15 | 4 | | |
| 0353009RS | | 1750 | 2 - T-15 | 1 | | |
| 0353050RS | 2-1/2 in. (63.5mm) x #8 | 100 | 1 - T-15 | 12 | | |
| 0353054RS | | 350 | 1 - T-15 | 4 | | |
| 0353059RS | | 1750 | 2 - T-15 | 1 | | |
| 0353000WS | 1-5/8 in. (41.3mm) x #8 | 100 | 1 - T-15 | 12 | Winchester | |
| 0353004WS | | 350 | 1 - T-15 | 4 | | |
| 0353009WS | | 1750 | 2 - T-15 | 1 | | |
| 0353050WS | 2-1/2 in. (63.5mm) x #8 | 100 | 1 - T-15 | 12 | | |
| 0353054WS | | 350 | 1 - T-15 | 4 | | |
| 0353059WS | | 1750 | 2 - T-15 | 1 | | |
| 0353000NS | 1-5/8 in. (41.3mm) x #8 | 100 | 1 - T-15 | 12 | Stone Grey | |
| 0353004NS | | 350 | 1 - T-15 | 4 | | |
| 0353009NS | | 1750 | 2 - T-15 | 1 | | |
| 0353050NS | 2-1/2 in. (63.5mm) x #8 | 100 | 1 - T-15 | 12 | | |
| 0353054NS | | 350 | 1 - T-15 | 4 | | |
| 0353059NS | | 1750 | 2 - T-15 | 1 | | |
| 0353000GS | 1-5/8 in. (41.3mm) x #8 | 100 | 1 - T-15 | 12 | Dark Grey | |
| 0353004GS | | 350 | 1 - T-15 | 4 | | |
| 0353009GS | | 1750 | 2 - T-15 | 1 | | |
| 0353050GS | 2-1/2 in. (63.5mm) x #8 | 100 | 1 - T-15 | 12 | | |
| 0353054GS | | 350 | 1 - T-15 | 4 | | |
| 0353059GS | | 1750 | 2 - T-15 | 1 | | |


For more information on coatings, go to pg. 56



316 STAINLESS STEEL MARINE GRADE - PAINTED
Trim Screws


| SKU# | SIZE | QTY | DRIVER BIT | CT./MASTER | COLOR | |
|-----------|-------------------------|------|------------|------------|------------|---|
| 0353000SS | 1-5/8 in. (41.3mm) x #8 | 100 | 1 - T-15 | 12 | Sand |  |
| 0353004SS | | 350 | 1 - T-15 | 4 | | |
| 0353009SS | | 1750 | 2 - T-15 | 1 | | |
| 0353050SS | 2-1/2 in. (63.5mm) x #8 | 100 | 1 - T-15 | 12 | | |
| 0353054SS | | 350 | 1 - T-15 | 4 | | |
| 0353059SS | | 1750 | 2 - T-15 | 1 | | |
| 0353000DS | 1-5/8 in. (41.3mm) x #8 | 100 | 1 - T-15 | 12 | Dark Brown |  |
| 0353004DS | | 350 | 1 - T-15 | 4 | | |
| 0353009DS | | 1750 | 2 - T-15 | 1 | | |
| 0353050DS | 2-1/2 in. (63.5mm) x #8 | 100 | 1 - T-15 | 12 | | |
| 0353054DS | | 350 | 1 - T-15 | 4 | | |
| 0353059DS | | 1750 | 2 - T-15 | 1 | | |
| 0353000CS | 1-5/8 in. (41.3mm) x #8 | 100 | 1 - T-15 | 12 | Cedar |  |
| 0353004CS | | 350 | 1 - T-15 | 4 | | |
| 0353009CS | | 1750 | 2 - T-15 | 1 | | |
| 0353050CS | 2-1/2 in. (63.5mm) x #8 | 100 | 1 - T-15 | 12 | | |
| 0353054CS | | 350 | 1 - T-15 | 4 | | |
| 0353059CS | | 1750 | 2 - T-15 | 1 | | |
| 0353100S | 1-5/8 in. (41.3mm) x #8 | 100 | 1 - T-15 | 12 | White |  |
| 0353104S | | 350 | 1 - T-15 | 4 | | |
| 0353109S | | 1750 | 2 - T-15 | 1 | | |
| 0353150S | 2-1/2 in. (63.5mm) x #8 | 100 | 1 - T-15 | 12 | | |
| 0353154S | | 350 | 1 - T-15 | 4 | | |
| 0353159S | | 1750 | 2 - T-15 | 1 | | |
| 0353000BS | 1-5/8 in. (41.3mm) x #8 | 100 | 1 - T-15 | 12 | Brown |  |
| 0353004BS | | 350 | 1 - T-15 | 4 | | |
| 0353009BS | | 1750 | 2 - T-15 | 1 | | |
| 0353050BS | 2-1/2 in. (63.5mm) x #8 | 100 | 1 - T-15 | 12 | | |
| 0353054BS | | 350 | 1 - T-15 | 4 | | |
| 0353059BS | | 1750 | 2 - T-15 | 1 | | |
| 0353000TS | 1-5/8 in. (41.3mm) x #8 | 100 | 1 - T-15 | 12 | Tan |  |
| 0353004TS | | 350 | 1 - T-15 | 4 | | |
| 0353009TS | | 1750 | 2 - T-15 | 1 | | |
| 0353050TS | 2-1/2 in. (63.5mm) x #8 | 100 | 1 - T-15 | 12 | | |
| 0353054TS | | 350 | 1 - T-15 | 4 | | |
| 0353059TS | | 1750 | 2 - T-15 | 1 | | |

For more information on coatings, go to pg. 56

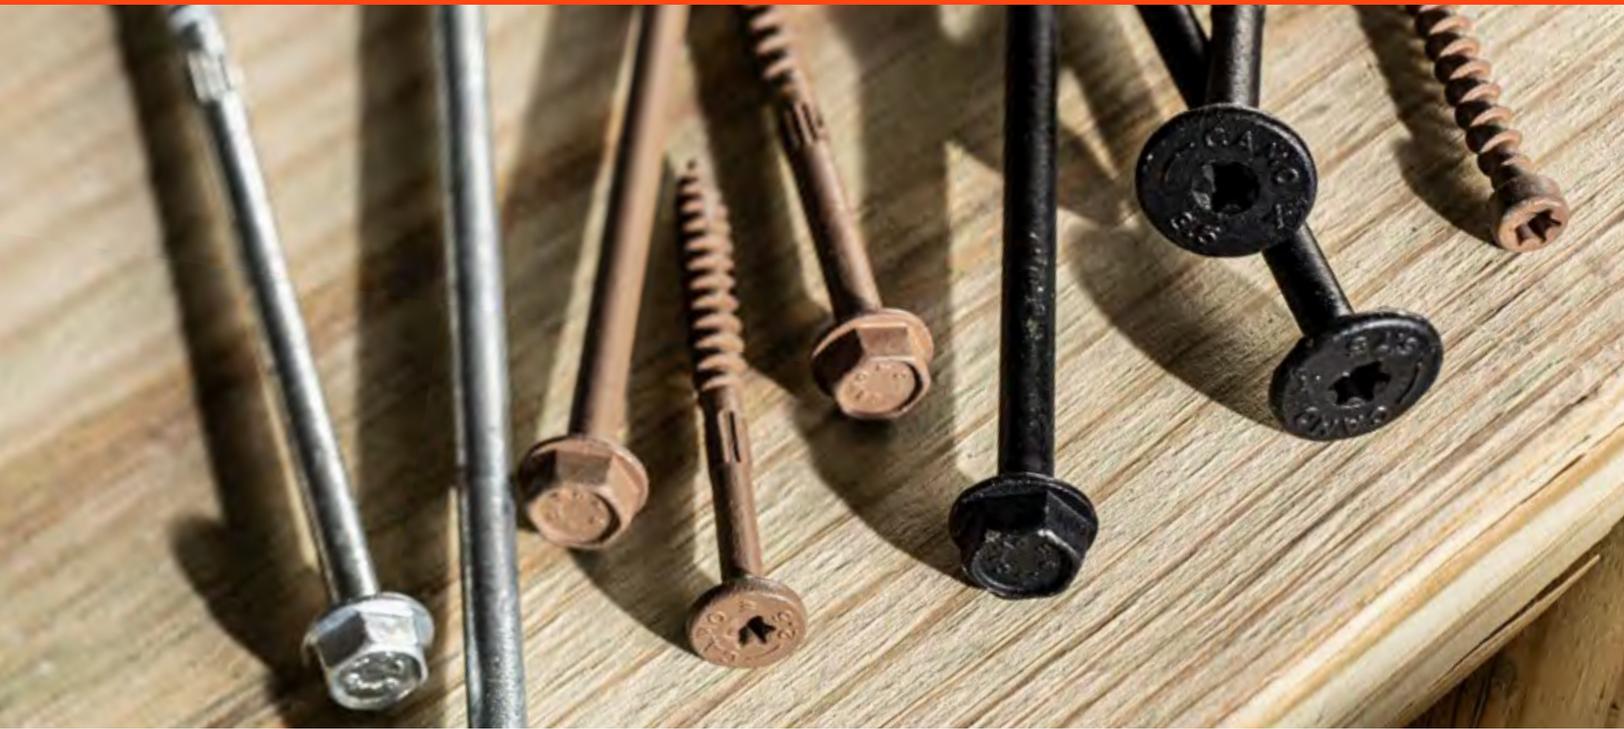


STRUCTURAL SCREWS

CAMO offers a full line of high-performing, code-compliant structural screws for all your deck and framing needs. They are engineered to start fast, drive smooth, and hold strong. No pre-drilling required. Features our industry-leading propriety coating for superior corrosion resistance.

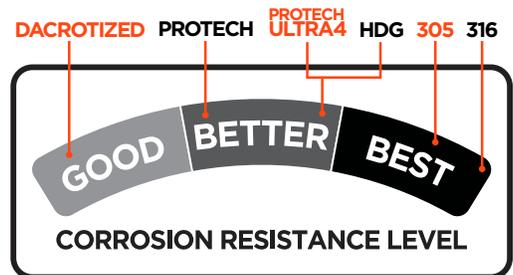

See pg. 56 for more information

DESIGN FEATURES

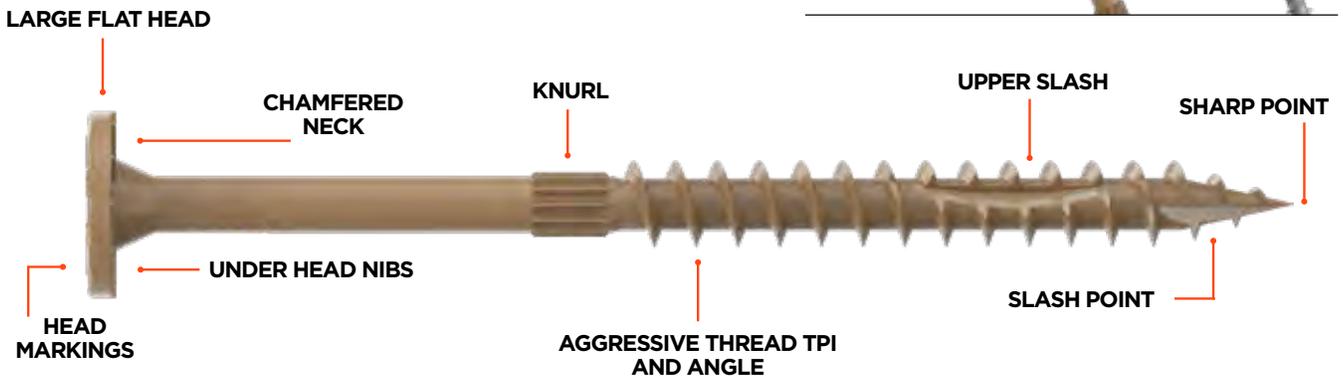

PROTECH[™] ULTRA 4

- TAN
- BLACK



CODE COMPLIANT

Our structural screws have been third-party tested, audited, and certified as IBC and IRC code-compliant by Dr J Engineering

- Our line covers all popular interior and exterior structural applications
- Engineered to start fast, drive smooth, and hold strong - no pre-drilling required
- Rigorously tested and approved for use with pressure-treated lumber
- IRC and IBC code compliant
- Available in corrosion-resistant Hot Dip Galvanized and PROTECH Ultra 4 Coating

LEARN MORE ABOUT OUR STRUCTURAL SCREWS



CODE COMPLIANT APPLICATIONS



TRUSS



LEDGER



MULTI-PLY



FRAMING

GENERAL CONSTRUCTION APPLICATIONS



DECK BLOCKING



POSTS



STRUCTURES



LANDSCAPING



GENERAL CONSTRUCTION

RECOMMENDED APPLICATIONS

|  TRUSS |  MULTI-PLY + LEDGER |  FRAMING |  MULTI-PURPOSE |
|---|--|---|--|
| <ul style="list-style-type: none"> • Double top plate to truss or stud • Top plate to end wall truss (gable end) • Bottom plate to rim board • Beams to joist | <ul style="list-style-type: none"> • Multi-ply wood headers and beams • Deck posts, beams, and handrails • Interior and exterior ledger boards • General construction projects | <ul style="list-style-type: none"> • Wood-to-wood framing connections • Deck blocking • Interior and exterior projects | <ul style="list-style-type: none"> • Garden and landscaping projects • Deck posts, beams, and handrails • General construction projects |

TRUSS SCREWS (GUIDE INCLUDED)



NEW



- IRC/IBC Code Compliant (DrJ TER 2102-01 and 2102-03)
- For truss and rafter to top plate, stud to top plate, and deck joist to beam connections
- Replaces hurricane ties
- Fully threaded for maximum holding power
- Cylinder head easily countersinks for flush studs
- Sharp point starts fast with no pre-drilling, reducing drive time
- Slashes for reduced splitting
- T-30 Star Drive provides more points of contact, reducing cam-outs and limiting bit wear
- Includes easy-to-use truss screw guide
- CAMO PROTECH ULTRA 4 coating
- For interior and exterior use



| SKU# | SIZE | QTY | DRIVER BIT | CT./MASTER |
|---------|-------------------------------------|-----|------------|------------|
| 0372244 | 6 in. (152.4mm) x 0.156 in. (3.9mm) | 50 | 1 - T-30 | 4 |
| 0372249 | | 500 | 1 - T-30 | 1 |

TRUSS GUIDE

Fasten at the right angle every time with our hands-free truss guide, included in every pail.




DOUBLE TOP PLATE TO TRUSS



DOUBLE TOP PLATE TO TRUSS



BEAM TO TRUSS



BEAM TO JOIST



DOUBLE TOP PLATE TO STUD



BOTTOM PLATE TO RIM BOARD

FRAMING SCREWS

NEW



- IRC/IBC Code Compliant (DrJ TER 2102-01)
- For wood-to-wood framing connections, deck blocking, interior and exterior projects
- Replaces 8d, 10d, and 16d nails in interior and exterior framing applications
- Straight knurl reduces driving torque
- 6 nibs underhead help countersink screw
- Sharp point starts fast with no pre-drilling, reducing drive time
- Slashes for reduced splitting
- T-25 Star Drive provides more points of contact, reducing cam-outs and limiting bit wear
- CAMO PROTECH ULTRA 4 coating



| SKU# | SIZE | QTY | DRIVER BIT | CT./MASTER |
|---------|---------------------------------------|------|------------|------------|
| 0355150 | 2-½ in. (63.5mm) x 0.160 in. (4.06mm) | 50 | 1 - T-25 | 12 |
| 0355154 | | 150 | 1 - T-25 | 4 |
| 0355159 | | 1000 | 2 - T-25 | 1 |
| 0355170 | 3 in. (76.2mm) x 0.160 in. (4.06mm) | 50 | 1 - T-25 | 12 |
| 0355174 | | 150 | 1 - T-25 | 4 |
| 0355179 | | 1000 | 2 - T-25 | 1 |

5/16 In. LEDGER + MULTI-PLY SCREWS



- IRC/IBC Code-Compliant (DrJ TER 2102-01, 2012-02, and 2102-04)
- Replaces nailing patterns that do not always draw the wood together and 1/2 in. lag screws in general construction projects
- Straight knurl reduces driving torque
- Nibs underhead help countersink screw
- Sharp point starts fast with no pre-drilling, reducing drive time
- Slashes for reduced splitting
- T-40 Star Drive provides more points of contact, reducing cam-outs and limiting bit wear
- CAMO PROTECH ULTRA 4 coating
- Interior and exterior use

NEW



| SKU# | SIZE | QTY | DRIVER BIT | CT./MASTER | APPLICATION |
|---------|--|-----|------------|------------|--------------------|
| 0366180 | 2-7/8 in. (73mm) x 5/16 in. (7.9mm) | 10 | 1 - T-40 | 8 | Multi-Ply |
| 0366184 | | 50 | 1 - T-40 | 4 | |
| 0366189 | | 250 | 2 - T-40 | 1 | |
| 0366190 | 3-1/2 in. (88.9mm) x 5/16 in. (7.9mm) | 10 | 1 - T-40 | 8 | Ledger + Multi-Ply |
| 0366194 | | 50 | 1 - T-40 | 4 | |
| 0366199 | | 250 | 2 - T-40 | 1 | |
| 0366200 | 4 in. (101.6mm) x 5/16 in. (7.9mm) | 10 | 1 - T-40 | 8 | Ledger + Multi-Ply |
| 0366204 | | 50 | 1 - T-40 | 4 | |
| 0366209 | | 250 | 2 - T-40 | 1 | |
| 0366210 | 4-1/2 in. (114.3mm) x 5/16 in. (7.9mm) | 10 | 1 - T-40 | 8 | Multi-Ply |
| 0366214 | | 50 | 1 - T-40 | 4 | |
| 0366219 | | 250 | 2 - T-40 | 1 | |
| 0366220 | 5 in. (127mm) x 5/16 in. (7.9mm) | 10 | 1 - T-40 | 8 | Ledger + Multi-Ply |
| 0366224 | | 50 | 1 - T-40 | 4 | |
| 0366229 | | 250 | 2 - T-40 | 1 | |
| 0366240 | 6 in. (152.4mm) x 5/16 in. (7.9mm) | 10 | 1 - T-40 | 8 | Multi-Ply |
| 0366244 | | 50 | 1 - T-40 | 2 | |
| 0366249 | | 250 | 2 - T-40 | 1 | |
| 0366250 | 6-3/4 in. (171.5mm) x 5/16 in. (7.9mm) | 10 | 1 - T-40 | 8 | Multi-Ply |
| 0366254 | | 50 | 1 - T-40 | 2 | |
| 0366259 | | 250 | 2 - T-40 | 1 | |

5/16 in. Flat Head Screws available in 8" and 10" lengths for Multi-Purpose applications - see p. 37

MULTI-PURPOSE FLAT HEAD SCREWS

NEW

- IRC/IBC Code Compliant (DrJ TER 2102-01)
- For deck posts, beams, and general construction projects
- Replaces traditional lag screws and through-bolts
- Straight knurl reduces driving torque
- Nibs underhead help countersink screw
- Sharp point starts fast with no pre-drilling, reducing drive time
- Slashes for reduced splitting
- Star Drive provides more points of contact, reducing cam-outs and limiting bit wear
- CAMO PROTECH ULTRA 4 coating
- For interior and exterior use



5/16 In. MULTI-PURPOSE FLAT HEAD SCREWS

| SKU# | SIZE | QTY | DRIVER BIT | CT./MASTER |
|---------|------------------------------------|-----|------------|------------|
| 0366260 | 8 in. (203.2mm) x 5/16 in. (7.9mm) | 10 | 1 - T-40 | 10 |
| 0366264 | | 50 | 1 - T-40 | 2 |
| 0366269 | | 250 | 2 - T-40 | 1 |
| 0366270 | 10 in. (254mm) x 5/16 in. (7.9mm) | 10 | 1 - T-40 | 8 |
| 0366274 | | 50 | 1 - T-40 | 2 |
| 0366279 | | 250 | 2 - T-40 | 1 |



1/4 In. MULTI-PURPOSE FLAT HEAD SCREWS

| SKU# | SIZE | QTY | DRIVER BIT | CT./MASTER |
|---------|------------------------------------|-----|------------|------------|
| 0360170 | 3 in. (76.2mm) x 1/4 in. (6.35mm) | 10 | 1 - T-30 | 8 |
| 0360174 | | 50 | 1 - T-30 | 4 |
| 0360179 | | 500 | 2 - T-30 | 1 |
| 0360200 | 4 in. (101.6mm) x 1/4 in. (6.35mm) | 10 | 1 - T-30 | 8 |
| 0360204 | | 50 | 1 - T-30 | 4 |
| 0360209 | | 250 | 2 - T-30 | 1 |
| 0360240 | 6 in. (152.4mm) x 1/4 in. (6.35mm) | 10 | 1 - T-30 | 8 |
| 0360244 | | 50 | 1 - T-30 | 2 |
| 0360249 | | 250 | 2 - T-30 | 1 |
| 0360260 | 8 in. (203.2mm) x 1/4 in. (6.35mm) | 10 | 1 - T-30 | 8 |
| 0360264 | | 50 | 1 - T-30 | 2 |
| 0360269 | | 250 | 2 - T-30 | 1 |
| 0360270 | 10 in. (254mm) x 1/4 in. (6.35mm) | 10 | 1 - T-30 | 8 |
| 0360274 | | 50 | 1 - T-30 | 2 |
| 0360279 | | 250 | 2 - T-30 | 1 |

MULTI-PURPOSE HEX HEAD SCREWS

NEW

- IRC/IBC Code Compliant (DrJ TER 2102-01)
- For deck posts, beams, and general construction projects
- Slashes for reduced splitting
- Sharp point starts fast with no pre-drilling, reducing drive time
- Hex head with washer locks into a hex driver
- Straight knurl reduces driving torque
- Replaces lag screws
- Available in Hot-Dip Galvanized and CAMO PROTECH ULTRA 4 coating

PROTECH ULTRA 4 5/16 in. HEAVY DUTY MULTI-PURPOSE HEX HEAD SCREWS



| SKU# | SIZE | QTY | DRIVER BIT | CT./MASTER |
|---------|-------------------------------------|-----|--------------|------------|
| 0365260 | 8 in. (203.2mm) x 5/16 in. (7.9mm) | 10 | 7/16 in. Hex | 8 |
| 0365264 | | 50 | 7/16 in. Hex | 2 |
| 0365269 | | 250 | 7/16 in. Hex | 1 |
| 0365270 | 10 in. (254mm) x 5/16 in. (7.9mm) | 10 | 7/16 in. Hex | 8 |
| 0365274 | | 50 | 7/16 in. Hex | 2 |
| 0365279 | | 250 | 7/16 in. Hex | 1 |
| 0365280 | 12 in. (304.8mm) x 5/16 in. (7.9mm) | 10 | 7/16 in. Hex | 6 |
| 0365284 | | 50 | 7/16 in. Hex | 2 |

PROTECH ULTRA 4 1/4 in. MULTI-PURPOSE HEX HEAD SCREWS



| SKU# | SIZE | QTY | DRIVER BIT | CT./MASTER |
|---------|---------------------------------------|-----|-------------|------------|
| 0364090 | 1-1/2 in. (38.1mm) x 1/4 in. (6.35mm) | 25 | 3/8 in. Hex | 8 |
| 0364094 | | 250 | 3/8 in. Hex | 4 |
| 0364170 | 3 in. (76.2mm) x 1/4 in. (6.35mm) | 10 | 3/8 in. Hex | 8 |
| 0364174 | | 50 | 3/8 in. Hex | 4 |
| 0364179 | | 500 | 3/8 in. Hex | 1 |
| 0364200 | 4 in. (101.6mm) x 1/4 in. (6.35mm) | 10 | 3/8 in. Hex | 8 |
| 0364204 | | 50 | 3/8 in. Hex | 4 |
| 0364209 | | 250 | 3/8 in. Hex | 1 |
| 0364240 | 6 in. (152.4mm) x 1/4 in. (6.35mm) | 10 | 3/8 in. Hex | 8 |
| 0364244 | | 50 | 3/8 in. Hex | 2 |
| 0364249 | | 250 | 3/8 in. Hex | 1 |

NEW

HOT-DIP GALVANIZED

5/16 in. HEAVY DUTY MULTI-PURPOSE HEX HEAD SCREWS



| SKU# | SIZE | QTY | DRIVER BIT | CT./MASTER |
|---------|------------------------------------|-----|--------------|------------|
| 0369260 | 8 in. (203.2mm) x 5/16 in. (7.9mm) | 10 | 7/16 in. Hex | 8 |
| 0369264 | | 50 | 7/16 in. Hex | 2 |
| 0369269 | | 250 | 7/16 in. Hex | 1 |
| 0369270 | 10 in. (254mm) x 5/16 in. (7.9mm) | 10 | 7/16 in. Hex | 8 |
| 0369274 | | 50 | 7/16 in. Hex | 2 |
| 0369279 | | 250 | 7/16 in. Hex | 1 |

HOT-DIP GALVANIZED

1/4 in. MULTI-PURPOSE HEX HEAD SCREWS



| SKU# | SIZE | QTY | DRIVER BIT | CT./MASTER |
|---------|------------------------------------|-----|-------------|------------|
| 0368200 | 4 in. (101.6mm) x 1/4 in. (6.35mm) | 10 | 3/8 in. Hex | 8 |
| 0368204 | | 50 | 3/8 in. Hex | 4 |
| 0368209 | | 250 | 3/8 in. Hex | 1 |
| 0368240 | 6 in. (152.4mm) x 1/4 in. (6.35mm) | 10 | 3/8 in. Hex | 8 |
| 0368244 | | 50 | 3/8 in. Hex | 4 |
| 0368249 | | 250 | 3/8 in. Hex | 1 |

EXTERIOR ACCESSORIES

POWER BITS



- Power bits come in each pail of exterior screws for convenience on the jobsite
- 2 in. (50.8mm) long
- Premium Star Drive power bit allows for better connections



| SKU# | DESCRIPTION | QTY | CT./MASTER |
|---------|---------------------------|-----|------------|
| 0333900 | T-15 Star Drive Power Bit | 3 | 10 |
| 0333910 | T-20 Star Drive Power Bit | 3 | 10 |
| 0333920 | T-25 Star Drive Power Bit | 3 | 10 |
| 0333990 | T-30 Star Drive Power Bit | 3 | 10 |
| 0333930 | T-40 Star Drive Power Bit | 3 | 10 |






STAINLESS STEEL FASTENERS

CAMO offers a comprehensive line of Stainless Steel screws and nails to help you build a better deck in corrosive environments. Our 305 Stainless Steel screws deliver an aesthetic finish and hold up in your connections, while 316 Marine Grade Stainless Steel fasteners offer ultimate protection against corrosion in coastal and agricultural environments.

CORROSION RESISTANCE METER

While our PROTECH coating offers good resistance against mild corrosion, 305 and 316 Stainless Steel are the best alloys to build with in corrosive areas.

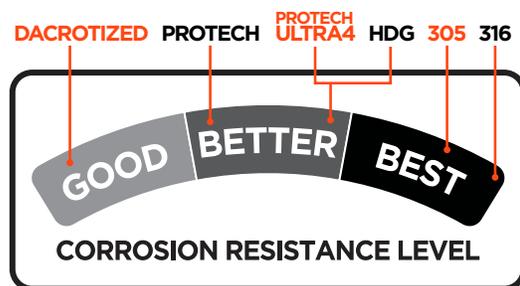

See p. 56 for more information

305 STAINLESS STEEL

- Exterior structures outside of 3,000 ft. from a saltwater shoreline
- Installations of pressure treated, PVC, composite, and capped composite boards
- Any outdoor project that you want to protect against potential corrosion

316 STAINLESS STEEL

- Coastal, marine, or waterway areas within 3,000 ft of saltwater
- Structures exposed to chlorine, wood strippers, or ice-melting chemicals
- Agricultural environments that deal with chemicals, pesticides, and treatments
- Installations of cedar, redwood, or hardwood decking where tannin release caused by carbon fasteners may cause staining

RECOMMENDED APPLICATIONS FOR EACH FASTENER:

DECK



- Wood decking projects
- Fences
- Any exterior wood-to-wood connection

COMPOSITE



- Composite decking projects
- PVC decking projects

EDGE



- Fasten any square deck board through the edge of the board using the MARKSMAN Pro tools

TRIM



- Decking
- Exterior trim
- Deck rails
- Balusters
- Fences

HAND DRIVE NAILS



- Decking
- Wood-to-wood connections
- Joist hangers

COLLATED NAILS



- Framing
- General construction
- Decks and fences
- Metal joist hangers

DECK SCREWS

- For fastening wood decking and other wood-to-wood connections in corrosive environments
- Type 17 slash point starts fast with no pre-drilling, reducing drive time
- Buglehead draws board tight, increasing pull-down strength
- 2/3 thread design offers premium holding power
- T-25 Star Drive provides more points of contact, reducing cam-outs and limiting bit wear
- Available in 305 Stainless Steel and 316 Stainless Steel

305 STAINLESS STEEL Deck Screws



| SKU# | SIZE | QTY | DRIVER BIT | CT./MASTER | |
|----------|--------------------------|------|------------------------------------|------------|----|
| 0348100* | 1-5/8 in. (41.3mm) x #8 | 100 | 30 sq. ft. (2.79m ²) | 1 - T-25 | 12 |
| 0348104* | | 350 | 100 sq. ft. (9.29m ²) | 1 - T-25 | 4 |
| 0348109* | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-25 | 1 |
| 0348130* | 2 in. (50.8mm) x #8 | 100 | 30 sq. ft. (2.79m ²) | 1 - T-25 | 12 |
| 0348134* | | 350 | 100 sq. ft. (9.29m ²) | 1 - T-25 | 4 |
| 0348139* | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-25 | 1 |
| 0348150 | 2-1/2 in. (63.5mm) x #10 | 100 | 30 sq. ft. (2.79m ²) | 1 - T-25 | 12 |
| 0348154 | | 350 | 100 sq. ft. (9.29m ²) | 1 - T-25 | 4 |
| 0348159 | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-25 | 1 |
| 0348170 | 3 in. (76.2mm) x #10 | 100 | 30 sq. ft. (2.79m ²) | 1 - T-25 | 12 |
| 0348174 | | 350 | 100 sq. ft. (9.29m ²) | 1 - T-25 | 4 |
| 0348179 | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-25 | 1 |
| 0348190* | 3-1/2 in. (88.9mm) x #10 | 50 | 30 sq. ft. (2.79m ²) | 1 - T-25 | 12 |
| 0348194* | | 250 | 100 sq. ft. (9.29m ²) | 1 - T-25 | 4 |
| 0348199* | | 1350 | 500 sq. ft. (46.45m ²) | 2 - T-25 | 1 |
| 0348200* | 4 in. (101.6mm) x #10 | 50 | 30 sq. ft. (2.79m ²) | 1 - T-25 | 12 |
| 0348204* | | 250 | 100 sq. ft. (9.29m ²) | 1 - T-25 | 4 |
| 0348209* | | 1350 | 500 sq. ft. (46.45m ²) | 2 - T-25 | 1 |

316 STAINLESS STEEL MARINE GRADE
Deck Screws



| SKU# | SIZE | QTY | COVERAGE | DRIVER BIT | CT./MASTER |
|----------|--------------------------|------|------------------------------------|------------|------------|
| 0348100S | 1-5/8 in. (41.3mm) x #9 | 100 | 30 sq. ft. (2.79m ²) | 1 - T-25 | 12 |
| 0348104S | | 350 | 100 sq. ft. (9.29m ²) | 1 - T-25 | 4 |
| 0348130S | 2 in. (50.8mm) x #9 | 100 | 30 sq. ft. (2.79m ²) | 1 - T-25 | 12 |
| 0348134S | | 350 | 100 sq. ft. (9.29m ²) | 1 - T-25 | 4 |
| 0348139S | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-25 | 1 |
| 0348150S | 2-1/2 in. (63.5mm) x #10 | 100 | 30 sq. ft. (2.79m ²) | 1 - T-25 | 12 |
| 0348154S | | 350 | 100 sq. ft. (9.29m ²) | 1 - T-25 | 4 |
| 0348159S | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-25 | 1 |
| 0348170S | 3 in. (76.2mm) x #10 | 100 | 30 sq. ft. (2.79m ²) | 1 - T-25 | 12 |
| 0348174S | | 350 | 100 sq. ft. (9.29m ²) | 1 - T-25 | 4 |
| 0348179S | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-25 | 1 |
| 0348190S | 3-1/2 in. (88.9mm) x #10 | 50 | 30 sq. ft. (2.79m ²) | 1 - T-25 | 12 |
| 0348194S | | 250 | 100 sq. ft. (9.29m ²) | 1 - T-25 | 4 |
| 0348199S | | 1350 | 500 sq. ft. (46.45m ²) | 2 - T-25 | 1 |

COMPOSITE SCREWS

- Color-matched screws for securing composite and PVC decking in highly corrosive environments
- Type 99 double slash point augers board material out for fast driving
- Trilobular shank reduces torque and prevents mushrooming
- Reverse thread at top increases pull-down power
- Cutting lead edge creates a flush finish
- T-20 Star Drive provides more points of contact, reducing cam-outs and limiting bit wear



COLOR MATCHER

Our Composite screws are available in painted finishes to match popular deck boards. Use the color matcher on camofasteners.com to find the right color for your board.

316 STAINLESS STEEL MARINE GRADE Composite Screws



| SKU# | SIZE | QTY | COVERAGE | DRIVER BIT | CT./MASTER | COLOR |
|-----------|------------------------|------|------------------------------------|------------|------------|------------|
| 0367158BS | 2-½ in. (63.5mm) x #10 | 350 | 100 sq. ft. (9.29m ²) | 1 - T-20 | 4 | Brown |
| 0367159BS | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-20 | 1 | |
| 0367158CS | 2-½ in. (63.5mm) x #10 | 350 | 100 sq. ft. (9.29m ²) | 1 - T-20 | 4 | Cedar |
| 0367159CS | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-20 | 1 | |
| 0367158ES | 2-½ in. (63.5mm) x #10 | 350 | 100 sq. ft. (9.29m ²) | 1 - T-20 | 4 | Grey |
| 0367159ES | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-20 | 1 | |
| 0367158DS | 2-½ in. (63.5mm) x #10 | 350 | 100 sq. ft. (9.29m ²) | 1 - T-20 | 4 | Dark Brown |
| 0367159DS | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-20 | 1 | |

| SKU# | SIZE | QTY | COVERAGE | DRIVER BIT | CT./MASTER | COLOR | |
|-----------|------------------------|------|------------------------------------|------------|------------|------------|---|
| 0367158NS | 2-½ in. (63.5mm) x #10 | 350 | 100 sq. ft. (9.29m ²) | 1 - T-20 | 4 | Stone Grey |  |
| 0367159NS | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-20 | 1 | | |
| 0367158RS | 2-½ in. (63.5mm) x #10 | 350 | 100 sq. ft. (9.29m ²) | 1 - T-20 | 4 | Redwood |  |
| 0367159RS | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-20 | 1 | | |
| 0367158SS | 2-½ in. (63.5mm) x #10 | 350 | 100 sq. ft. (9.29m ²) | 1 - T-20 | 4 | Sand |  |
| 0367159SS | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-20 | 1 | | |
| 0367158TS | 2-½ in. (63.5mm) x #10 | 350 | 100 sq. ft. (9.29m ²) | 1 - T-20 | 4 | Tan |  |
| 0367159TS | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-20 | 1 | | |
| 0367158WS | 2-½ in. (63.5mm) x #10 | 350 | 100 sq. ft. (9.29m ²) | 1 - T-20 | 4 | Winchester |  |
| 0367159WS | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-20 | 1 | | |
| 0367158GS | 2-½ in. (63.5mm) x #10 | 350 | 100 sq. ft. (9.29m ²) | 1 - T-20 | 4 | Dark Grey |  |
| 0367159GS | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-20 | 1 | | |
| 0367158S | 2-½ in. (63.5mm) x #10 | 350 | 100 sq. ft. (9.29m ²) | 1 - T-20 | 4 | Bright |  |
| 0367159S | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-20 | 1 | | |

305 STAINLESS STEEL

Bright Collated Face Screws for Composite

• For exclusive use with the CAMO **DRIVE**™ Tool



| SKU# | SIZE | QTY | DRIVER BIT | CT./MASTER |
|---------|------------------------|------|------------|------------|
| 0395080 | 2-½ in. (63.5mm) x #10 | 1000 | 2 - T-20 | 1 |

316 STAINLESS STEEL

Bright Collated Face Screws for Composite



| SKU# | SIZE | QTY | DRIVER BIT | CT./MASTER |
|----------|------------------------|------|------------|------------|
| 0367158S | 2-½ in. (63.5mm) x #10 | 350 | T-20 | 4 |
| 0367159S | | 1750 | 2-T-20 | 1 |

EDGE SCREWS

- Fastens all square deck boards: pressure treated, composite, PVC, capped composite, cedar, redwood, and hardwood
- Patented rake tip augers material out as they're driven, reducing the potential for splitting and cracking*
- Trimhead reduces visibility on the edge of the board
- T-15 Star Drive offers best connection, reducing cam-outs and stripped screws

*Pre-drilling is required for hardwoods and capped composites

316 STAINLESS STEEL MARINE GRADE Edge Screws

- For exclusive use with CAMO **MARKSMAN Pro** Tools



| SKU# | SIZE | QTY | COVERAGE | DRIVER BIT | CT./MASTER |
|----------|-------------------------|------|------------------------------------|------------|------------|
| 0345220S | 1-7/8 in. (47.6mm) x #7 | 100 | 30 sq. ft. (2.79m ²) | -- | 12 |
| 0345228S | | 350 | 100 sq. ft. (9.29m ²) | 1 - T-15 | 12 |
| 0345224S | | 700 | 200 sq. ft. (18.58m ²) | 2 - T-15 | 4 |
| 0345219S | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-15 | 1 |
| 0345240S | 2-3/8 in. (60.3mm) x #7 | 100 | 30 sq. ft. (2.79m ²) | -- | 12 |
| 0345248S | | 350 | 100 sq. ft. (9.29m ²) | 1 - T-15 | 12 |
| 0345244S | | 700 | 200 sq. ft. (18.58m ²) | 2 - T-15 | 4 |
| 0345239S | | 1750 | 500 sq. ft. (46.45m ²) | 2 - T-15 | 1 |

316 STAINLESS STEEL MARINE GRADE Collated Edge Screws

- For exclusive use with the CAMO **DRIVE** Tool



| SKU# | SIZE | QTY | COVERAGE | DRIVER BIT | CT./MASTER |
|----------|-------------------------|------|-----------------------------------|------------|------------|
| 0395020S | 2-3/8 in. (60.3mm) x #7 | 1000 | 285 sq. ft. (26.5m ²) | 2 - T-15 | 1 |

TRIM SCREWS

- For fastening wood and PVC deck trim and finish applications in corrosive environments
- Type 17 slash point starts fast with no pre-drilling
- Trimhead screw reduces visibility in finish projects
- T-15 Star Drive provides more points of contact, reducing cam-outs and limiting bit wear
- Available in Bright 305 Stainless Steel, Bright 316 Stainless Steel, and Painted 316 Stainless Steel

305 STAINLESS STEEL

Trim Screws



| SKU# | SIZE | QTY | DRIVER BIT | CT./MASTER |
|----------|-------------------------|-----|------------|------------|
| 0350100* | 1-5/8 in. (41.3mm) x #8 | 100 | 1 - T-15 | 12 |
| 0350104* | | 350 | 1 - T-15 | 4 |
| 0350130* | 2 in. (50.8mm) x #8 | 100 | 1 - T-15 | 12 |
| 0350134* | | 350 | 1 - T-15 | 4 |
| 0350150* | 2-1/2 in. (63.5mm) x #8 | 100 | 1 - T-15 | 12 |
| 0350154* | | 350 | 1 - T-15 | 4 |
| 0350170* | 3 in. (76.2mm) x #8 | 100 | 1 - T-15 | 12 |
| 0350174* | | 350 | 1 - T-15 | 4 |

316 STAINLESS STEEL MARINE GRADE

Trim Screws



| SKU# | SIZE | QTY | DRIVER BIT | CT./MASTER | HEAD |
|----------|-------------------------|-----|------------|------------|------|
| 0350100S | 1-5/8 in. (41.3mm) x #8 | 100 | 1 - T-15 | 12 | |
| 0350104S | | 350 | 1 - T-15 | 4 | |
| 0350130S | 2 in. (50.8mm) x #8 | 100 | 1 - T-15 | 12 | |
| 0350134S | | 350 | 1 - T-15 | 4 | |
| 0350150S | 2-1/2 in. (63.5mm) x #8 | 100 | 1 - T-15 | 12 | |
| 0350154S | | 350 | 1 - T-15 | 4 | |
| 0350170S | 3 in. (76.2mm) x #8 | 100 | 1 - T-15 | 12 | |
| 0350174S | | 350 | 1 - T-15 | 4 | |
| 0350190S | 3-1/2 in. (88.9mm) x #8 | 100 | 1 - T-15 | 12 | |
| 0350194S | | 350 | 1 - T-15 | 4 | |

STAINLESS STEEL - TRIM SCREWS

316 STAINLESS STEEL MARINE GRADE - PAINTED

Trim Screws



COLOR MATCHER

Our Stainless Steel Trim screws are available in painted finishes to match popular deck boards.

Use the color matcher on camofasteners.com to find the right color for your board.



| SKU# | SIZE | QTY | DRIVER BIT | CT./MASTER | COLOR |
|-----------|-------------------------|------|------------|------------|------------|
| 0353000ES | 1-5/8 in. (41.3mm) x #8 | 100 | 1 - T-15 | 12 | Grey |
| 0353004ES | | 350 | 1 - T-15 | 4 | |
| 0353009ES | | 1750 | 2 - T-15 | 1 | |
| 0353050ES | 2-1/2 in. (63.5mm) x #8 | 100 | 1 - T-15 | 12 | |
| 0353054ES | | 350 | 1 - T-15 | 4 | |
| 0353059ES | | 1750 | 2 - T-15 | 1 | |
| 0353000RS | 1-5/8 in. (41.3mm) x #8 | 100 | 1 - T-15 | 12 | Redwood |
| 0353004RS | | 350 | 1 - T-15 | 4 | |
| 0353009RS | | 1750 | 2 - T-15 | 1 | |
| 0353050RS | 2-1/2 in. (63.5mm) x #8 | 100 | 1 - T-15 | 12 | |
| 0353054RS | | 350 | 1 - T-15 | 4 | |
| 0353059RS | | 1750 | 2 - T-15 | 1 | |
| 0353000WS | 1-5/8 in. (41.3mm) x #8 | 100 | 1 - T-15 | 12 | Winchester |
| 0353004WS | | 350 | 1 - T-15 | 4 | |
| 0353009WS | | 1750 | 2 - T-15 | 1 | |
| 0353050WS | 2-1/2 in. (63.5mm) x #8 | 100 | 1 - T-15 | 12 | |
| 0353054WS | | 350 | 1 - T-15 | 4 | |
| 0353059WS | | 1750 | 2 - T-15 | 1 | |
| 0353000NS | 1-5/8 in. (41.3mm) x #8 | 100 | 1 - T-15 | 12 | Stone Grey |
| 0353004NS | | 350 | 1 - T-15 | 4 | |
| 0353009NS | | 1750 | 2 - T-15 | 1 | |
| 0353050NS | 2-1/2 in. (63.5mm) x #8 | 100 | 1 - T-15 | 12 | |
| 0353054NS | | 350 | 1 - T-15 | 4 | |
| 0353059NS | | 1750 | 2 - T-15 | 1 | |
| 0353000GS | 1-5/8 in. (41.3mm) x #8 | 100 | 1 - T-15 | 12 | Dark Grey |
| 0353004GS | | 350 | 1 - T-15 | 4 | |
| 0353009GS | | 1750 | 2 - T-15 | 1 | |
| 0353050GS | 2-1/2 in. (63.5mm) x #8 | 100 | 1 - T-15 | 12 | |
| 0353054GS | | 350 | 1 - T-15 | 4 | |
| 0353059GS | | 1750 | 2 - T-15 | 1 | |

| SKU# | SIZE | QTY | DRIVER BIT | CT./MASTER | COLOR | |
|-----------|-------------------------|------|------------|------------|------------|---|
| 0353000SS | 1-5/8 in. (41.3mm) x #8 | 100 | 1 - T-15 | 12 | Sand |  |
| 0353004SS | | 350 | 1 - T-15 | 4 | | |
| 0353009SS | | 1750 | 2 - T-15 | 1 | | |
| 0353050SS | 2-1/2 in. (63.5mm) x #8 | 100 | 1 - T-15 | 12 | | |
| 0353054SS | | 350 | 1 - T-15 | 4 | | |
| 0353059SS | | 1750 | 2 - T-15 | 1 | | |
| 0353000DS | 1-5/8 in. (41.3mm) x #8 | 100 | 1 - T-15 | 12 | Dark Brown |  |
| 0353004DS | | 350 | 1 - T-15 | 4 | | |
| 0353009DS | | 1750 | 2 - T-15 | 1 | | |
| 0353050DS | 2-1/2 in. (63.5mm) x #8 | 100 | 1 - T-15 | 12 | | |
| 0353054DS | | 350 | 1 - T-15 | 4 | | |
| 0353059DS | | 1750 | 2 - T-15 | 1 | | |
| 0353000CS | 1-5/8 in. (41.3mm) x #8 | 100 | 1 - T-15 | 12 | Cedar |  |
| 0353004CS | | 350 | 1 - T-15 | 4 | | |
| 0353009CS | | 1750 | 2 - T-15 | 1 | | |
| 0353050CS | 2-1/2 in. (63.5mm) x #8 | 100 | 1 - T-15 | 12 | | |
| 0353054CS | | 350 | 1 - T-15 | 4 | | |
| 0353059CS | | 1750 | 2 - T-15 | 1 | | |
| 0353100S | 1-5/8 in. (41.3mm) x #8 | 100 | 1 - T-15 | 12 | White |  |
| 0353104S | | 350 | 1 - T-15 | 4 | | |
| 0353109S | | 1750 | 2 - T-15 | 1 | | |
| 0353150S | 2-1/2 in. (63.5mm) x #8 | 100 | 1 - T-15 | 12 | | |
| 0353154S | | 350 | 1 - T-15 | 4 | | |
| 0353159S | | 1750 | 2 - T-15 | 1 | | |
| 0353000BS | 1-5/8 in. (41.3mm) x #8 | 100 | 1 - T-15 | 12 | Brown |  |
| 0353004BS | | 350 | 1 - T-15 | 4 | | |
| 0353009BS | | 1750 | 2 - T-15 | 1 | | |
| 0353050BS | 2-1/2 in. (63.5mm) x #8 | 100 | 1 - T-15 | 12 | | |
| 0353054BS | | 350 | 1 - T-15 | 4 | | |
| 0353059BS | | 1750 | 2 - T-15 | 1 | | |
| 0353000TS | 1-5/8 in. (41.3mm) x #8 | 100 | 1 - T-15 | 12 | Tan |  |
| 0353004TS | | 350 | 1 - T-15 | 4 | | |
| 0353009TS | | 1750 | 2 - T-15 | 1 | | |
| 0353050TS | 2-1/2 in. (63.5mm) x #8 | 100 | 1 - T-15 | 12 | | |
| 0353054TS | | 350 | 1 - T-15 | 4 | | |
| 0353059TS | | 1750 | 2 - T-15 | 1 | | |

POWER BITS



T-15



T-20



T-25

- Power bits come in each pail of exterior screws for convenience on the jobsite.
- 2 in. (50.8mm) long
- Premium Star Drive power bit allows for better connections



| SKU# | DESCRIPTION | QTY | CT./MASTER |
|---------|---------------------------|-----|------------|
| 0333900 | T-15 Star Drive Power Bit | 3 | 10 |
| 0333910 | T-20 Star Drive Power Bit | 3 | 10 |
| 0333920 | T-25 Star Drive Power Bit | 3 | 10 |

HAND DRIVE NAILS

316 STAINLESS STEEL MARINE GRADE

Ring Shank Deck Nails



- For fastening wood patios and decks and other exterior wood-to-wood connections in corrosive environments
- Diamond point starts easily
- Ring shank offers superior holding power and withdrawal force
- Checkered flat head provides a large striking surface, reducing hammer slippage for easy drive connection



| SKU# | SIZE | QTY | SHANK | CT./MASTER |
|-----------|------------------------|--------|-------|------------|
| 5246158S* | 2-½ in. (63.5mm) x #8 | 1 lb. | Ring | 4 |
| 5246155S* | | 5 lb. | Ring | 12 |
| 5246178S* | 3 in. (76.2mm) x #10 | 1 lb. | Ring | 12 |
| 5246175S* | | 5 lb. | Ring | 4 |
| 5246179S* | | 25 lb. | Ring | 4 |
| 5246188S* | 3-¼ in. (82.5mm) x #12 | 1 lb. | Ring | 12 |
| 5246185S* | | 5 lb. | Ring | 4 |
| 5246195S* | 3-½ in. (88.9mm) x #16 | 5 lb. | Ring | 12 |
| 5246199S* | | 25 lb. | Ring | 4 |

316 STAINLESS STEEL MARINE GRADE

Joist Hanger Nails



- For installing joist hangers to wood framing in corrosive environments
- Diamond point starts easily
- Smooth shank is fast and easy to drive
- Short, heavy gauge provides superior holding power
- Flat head provides a large striking surface for easy drive connection



| SKU# | SIZE | QTY | SHANK | CT./MASTER |
|-----------|-----------------------|-------|--------|------------|
| 5096095S* | 1-½ in. (38.1mm) x #9 | 5 lb. | Smooth | 4 |

COLLATED NAILS

316 STAINLESS STEEL MARINE GRADE

Collated Ring Shank Framing Nails
(21° Plastic Strip)



- For general construction, framing, deck, and fence building in corrosive environments
- Ring shank offers superior holding power and withdrawal force
- Round head provides greater resistance to pull out
- 21° plastic strip fits most 20°-22° framing nailers



| SKU# | SIZE | QTY | SHANK |
|-----------|--|------|-------|
| 5710258S* | 2- ⁵ / ₈ in. (60.3mm) x .113 | 1000 | Ring |
| 5710176S* | 3 in. (76.2mm) x .120 | 1000 | Ring |
| 5710286S* | 3- ¹ / ₄ in. (82.5mm) x .120 | 1000 | Ring |

316 STAINLESS STEEL MARINE GRADE

Collated Metal Hanger
Nails (31° Paper Strip)




- For metal connectors, joist hangers, joist ties, and hurricane straps in corrosive environments
- Smooth shank provides good holding power
- Round head provides greater resistance to pull out
- Metal hanger nail strip fits most 31° metal connector nailers



| SKU# | SIZE | QTY | SHANK |
|-----------|--|------|--------|
| 5606090S* | 1- ¹ / ₂ in. (38.1mm) x .148 | 1000 | Smooth |



WHAT CAMO FASTENERS ARE MADE OF

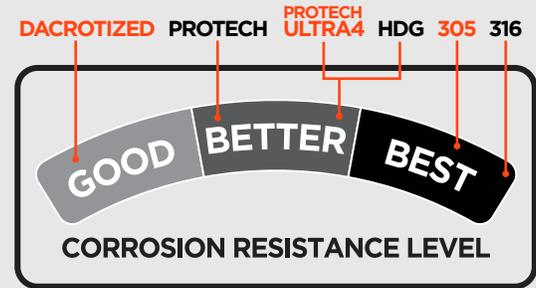

Building a deck, framing a house, or tackling any exterior project with CAMO fasteners means **building better**. CAMO fasteners start **fast**, create **strong connections**, and **hold up to the elements** over time, thanks to their coating and alloys.

Learn more about each option below so **you can be confident** you've got the right fastener for your project and gain **peace of mind** knowing that they are all **backed by a CAMO Warranty**.

PROTECH™



PROTECH is our proprietary coating for our steel screws. It is suitable for use with pressure treated lumber, PVC, composite, and capped composite deck boards in inland environments that face regular exposure to the elements. Our PROTECH-coated fasteners are guaranteed against rust and corrosion for the life of your project so long as they are installed following CAMO recommendations.


PROTECH-COATED FASTENERS ARE SUITABLE IN MANY APPLICATIONS:

- Decks, patios, and structures in inland areas away from water
- Installations of pressure treated, PVC, composite, and capped composite boards
- Exterior projects in temperate climates that face typical weather events

PROTECH™ ULTRA 4



Our proprietary PROTECH Ultra 4 four-layer coating system provides optimum corrosion resistance, UV and environmental protection, and torque reduction for a high-performing, long-lasting screw. Tested in accordance with ASTM G198, the coating meets or exceeds the protection of code-approved hot-dip galvanized (ASTM A153, Class D) in ground contact general use pressure treated lumber (AWPA UC1-UC4A). We test our coating 2X longer than industry standard requires, so you can be confident your connections will stand the test of time.

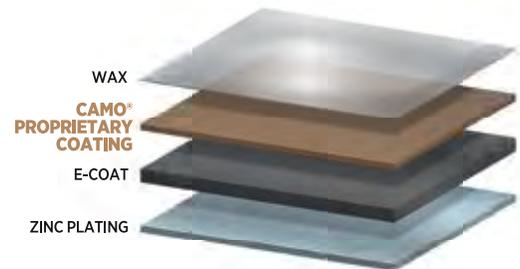

PROTECH ULTRA 4-COATED FASTENERS ARE SUITABLE IN MANY APPLICATIONS:

- For interior and exterior projects where corrosion resistance is key
- Structural projects that utilize a larger screw with a greater surface area, coming in contact with more wood
- Installations with ground contact general use pressure-treated lumber

HOT-DIP GALVANIZED



A small step under Stainless Steel in terms of corrosion protection, hot-dip galvanized coating is a viable and reliable option for various fasteners. The code-approved coating is tested to meet ASTM A153, Class D, and is approved for use in MCA ground contact pressure treated lumber.

The hot-dip galvanization process results in a thick coating that will wear over time but still offer excellent protection against corrosion for the lifetime of the exterior application. Additionally, the coating is applied uniformly, so your connections are completely protected.

HOT-DIP GALVANIZED COATING IS COMMONLY USED IN THE FOLLOWING APPLICATIONS:

- Exterior projects in temperate climates that you want to protect against the elements
- Structural projects that utilize larger screws with a greater surface area, coming in contact with more wood
- Coastal applications

305 STAINLESS STEEL



If your project is outside of 3,000 feet from a saltwater shoreline, Stainless Steel fasteners are recommended, and CAMO 305 Stainless Steel fits the bill. 305 Stainless Steel offers better resistance against corrosion than a carbon coating and will keep your project safe and long-lasting while offering excellent aesthetics. Widely available across the country, 305 Stainless Steel is a great alloy option for installing pressure treated lumber, PVC, composite, and capped composite deck boards no matter where you are located.

305 STAINLESS STEEL IS GREAT FOR A VARIETY OF APPLICATIONS:

- Exterior structures 3000 feet to 10 miles from a saltwater shoreline
- Installations of pressure treated, PVC, composite, and capped composite boards
- Any outdoor project that you want to protect against potential corrosion

316 STAINLESS STEEL



316 Stainless Steel is the best fastener for any project and is required for installations in highly corrosive areas, so your build remains structurally sound and aesthetically pleasing.

Saltwater environments present an opportunity for severe rust and corrosion, so 316 Stainless Steel is required in any coastal, marine, or waterway area within 3,000 feet of saltwater. We also recommend using 316 Stainless Steel in structures within a 10-mile reach of saltwater, which are susceptible to increased corrosion rates as saltwater is aerosolized.

316 STAINLESS STEEL IS RECOMMENDED IN A VARIETY OF APPLICATIONS BEYOND SALTWATER EXPOSURE:

- Structures near swimming pools where the surface will be exposed to chlorine
- Agricultural environments that deal with chemicals, pesticides, and treatments
- Decks, patios, and structures that will face wood strippers or ice-melting chemicals
- Installations of cedar, redwood, or hardwood decking where tannin release caused by carbon fasteners may cause staining and streaking

| FIND THE RIGHT CAMO FASTENER BY STARTING WITH YOUR BOARDS | BOARD PROFILE | FASTENING METHOD | FASTENERS | | | | NEVER-MISS™ Guide Included with CAMO Clips |
|---|-------------------|--|--|--|----------------------|---|---|
| | SQUARE GROOVED | EDGE CLIP FACE | EDGE (Collated and Hand Drive) | COMPOSITE (Collated and Hand Drive) | DECK (Hand Drive) | FACE SCREW (Collated-For Pressure Treated) | |
| Pressure Treated Lumber (Wet) | SQUARE | EDGE | Collated Edge Screws • PROTECH™ or 316 Stainless Steel | | | | |
| | | CLIP | Edge Screws • PROTECH™ or 316 Stainless Steel | | | | |
| Pressure Treated Lumber (KDAT) | SQUARE | FACE | Collated Face Screws for Pressure Treated • PROTECH™ | | | | |
| | | CLIP | Deck Screws • PROTECH™, 305 Stainless Steel, 316 Stainless Steel | | | | |
| PVC & Composite (Uncapped) | GROOVED | CLIP | STARTER Clips | | | | |
| | | CLIP | EDGE Clips | | | | ● |
| | CLIP | EDGEX Clips | | | | ● | |
| | CLIP | EDGEXMETAL Clips | | | | ● | |
| SQUARE | EDGE | Collated Edge Screws • PROTECH™ or 316 Stainless Steel | | | | | |
| | CLIP | Edge Screws • PROTECH™ or 316 Stainless Steel | | | | | |
| SQUARE | FACE | Collated Face Screws for Composite • PROTECH™ or 305 Stainless Steel | | | | | |
| | FACE | Composite Screws • PROTECH™ or 316 Stainless Steel | | | | | |
| Composite (capped) | GROOVED | CLIP | STARTER Clips | | | | |
| | | CLIP | EDGE Clips | | | | ● |
| | CLIP | EDGEX Clips | | | | ● | |
| | CLIP | EDGEXMETAL Clips | | | | ● | |
| SQUARE | EDGE | Edge Screws • PROTECH™ or 316 Stainless Steel | | | | | |
| | FACE | Collated Face Screws for Composite • PROTECH™ or 305 Stainless Steel | | | | | |
| Cedar & Redwood | SQUARE | EDGE | Edge Screws • 316 Stainless Steel | | | | |
| | | CLIP | Collated Edge Screws • 316 Stainless Steel | | | | |
| | | FACE | Deck Screws • 316 Stainless Steel | | | | |
| Hardwood | GROOVED | CLIP | STARTER Clips | | | | |
| | | CLIP | EDGE Clips | | | | ● |
| | CLIP | EDGEX Clips | | | | ● | |
| | CLIP | EDGEXMETAL Clips | | | | ● | |
| SQUARE | EDGE | Edge Screws • 316 Stainless Steel | | | | | |

CAMO[®]

The Better Way to Build a Deck

MICHIGAN

2964 Clydon Ave SW
Grand Rapids, MI 49519

NEW YORK

5985 Tarbell Rd
Syracuse, NY 13206

GEORGIA

555 Riverside Pkwy, Ste. 100
Austell, GA 30168

TEXAS

3701 Yale St
Houston, TX 77018

CALIFORNIA

8939 Etiwanda Ave
Rancho Cucamonga, CA 91739

WASHINGTON

4512 70th Ave E Suite 400
Fife, WA 98424

FOR MORE INFORMATION, PLEASE VISIT WWW.CAMOFASTENERS.COM OR CALL
800-968-6245 TO SPEAK WITH A CAMO PRODUCT EXPERT.